


WEIGHT DATA 2.4L 25 KW 642KG (1414 LB)
WOODEN SHIPPING SKIDS INCREASE OVERALL WEIGHT - 42KG (98 LB)



NOTES:

- 1) MINIMUM RECOMMENDED CONCRETE PAD SIZE: 1155 (45.5") WIDE X 2255 (88.8") LONG. REFERENCE INSTALLATION GUIDE SUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES.
- 2) ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE AND LOCAL CODES FOR MINIMUM DISTANCES FROM OTHER STRUCTURES.
- 3) CIRCUIT BREAKER INFORMATION:
SEE SPECIFICATION SHEET WITHIN OWNERS MANUAL
- 4) INSIDE STUB-UP AREA FOR AC LOAD LEAD CONDUIT CONNECTION, NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (.5 AMP MAX.) CONNECTION, AND ACCESS TO TRANSFER SWITCH CONTROL WIRES. REMOVE FRONT COVER FOR ACCESS.
- 4A) FIELD CUT HOLE IS ONLY REQUIRED FOR MOUNTING OF GENERATOR ON AN EXISTING PAD.
- 5) REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
- 6) REMOVE EITHER LEFT OR RIGHT HAND SIDE PANEL TO ACCESS EXHAUST MUFFLER AND FAN BELT.
- 7) INSIDE ACCESS TO 120VAC, 20A GFCI OUTLET PREWIRED TO SUPPLY POWER TO BATTERY CHARGER. USE 20A GFCI OUTLET FOR ENGINE BLOCK HEATER.

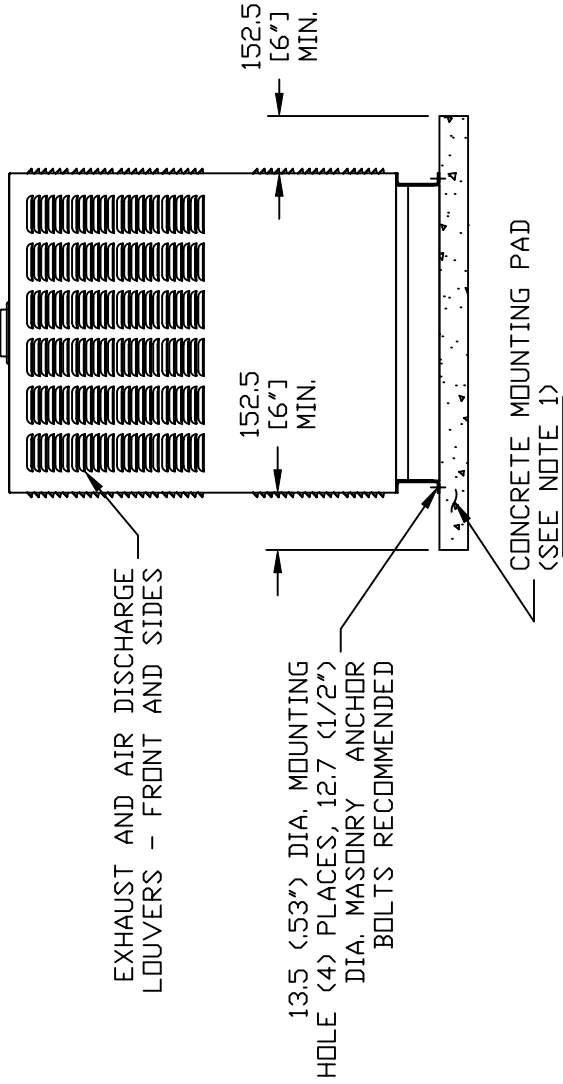

SERVICE ITEM ACCESSIBILITY CHART		
SERVICE ITEM	2. 4L	
OIL FILL CAP	EITHER DOOR	
OIL DIP STICK	THRU RIGHT DOOR	
OIL FILTER	THRU RIGHT DOOR	
OIL DRAIN HOSE	THRU RIGHT DOOR	
RADIATOR DRAIN HOSE	THRU LEFT DOOR	
AIR CLEANER ELEMENT	EITHER DOOR	
SPARK PLUGS	THRU RIGHT DOOR	
MUFFLER	SEE NOTE 6	
FAN BELT	SEE NOTE 6	
BATTERY	THRU LEFT DOOR	
AC OUTLET(S)	THRU RIGHT REAR DOOR	

REFERENCE OWNERS MANUAL FOR PERIODIC REPLACEMENT PART LISTINGS

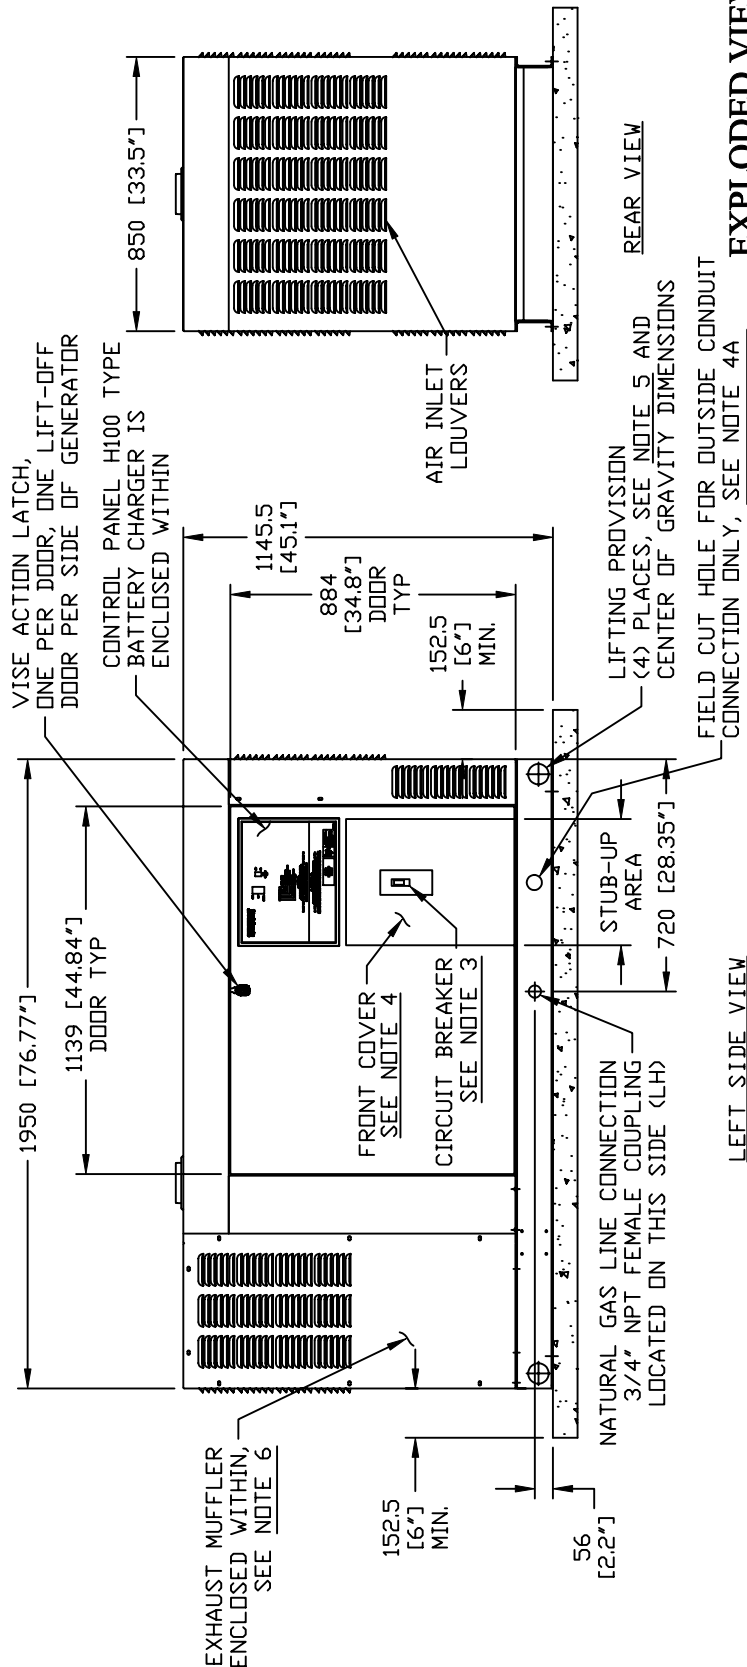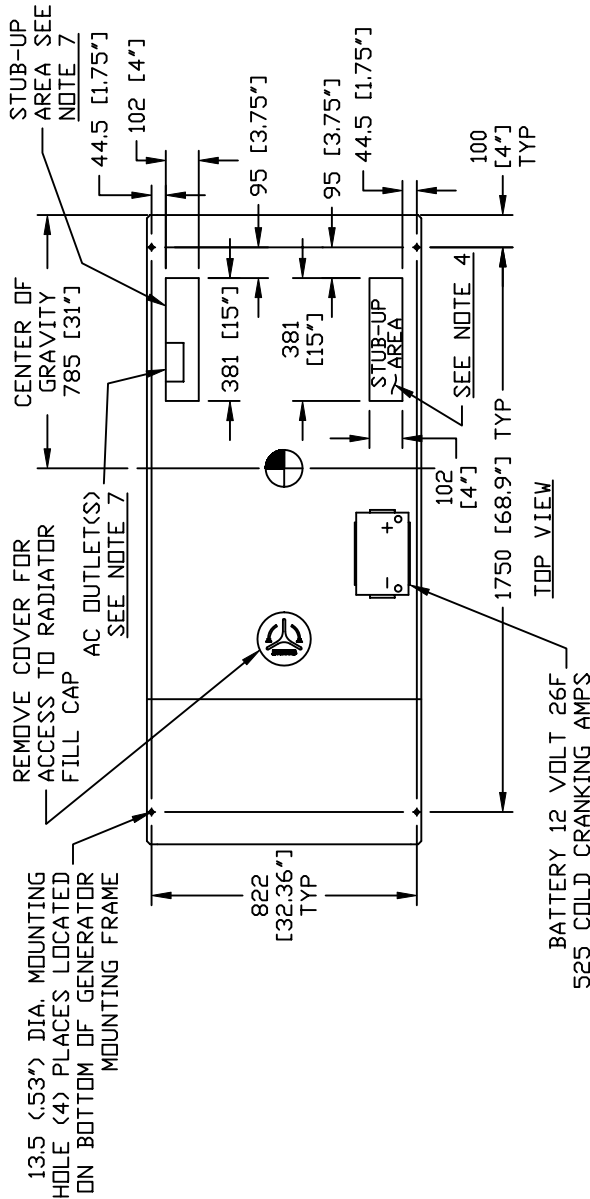

EXPLODED VIEW:
INSTALLATION DRAWING 2.4L 25 KW IND
DRAWING #: 0G2574