

## 9 / 11 kW Air-cooled Generator Sets

### Standby Power Rating

G007057-0, G007057-1 (Aluminum - Dark Gray) - 9 kW 60 Hz

G007058-0, G007058-1 (Aluminum - Dark Gray) - 11 kW 60 Hz

### INCLUDES

- **Innovative engine design and rigorous testing:** Honeywell generators use Generac's industry leading G-Force engine lineup for added peace of mind and reliability for when you need it most. The G-Force series of engines are purpose built and designed to handle the rigors of extended run times in high temperatures and extreme operating conditions.
- **PrecisionPower™ Electrical Technology:** Superior harmonics and sine wave form produce less than 5% Total Harmonic Distortion for utility quality power. This allows confident operation of sensitive electronic and microchip based appliances, such as variable speed HVAC.
- **Compensated Voltage Regulation:** This state-of-the-art, power maximizing regulation system is the standard on all Honeywell models. It provides optimized fast response to changing load conditions and maximum motor starting capability by electronically torque-matching the surge loads to the engine. Digital voltage regulation at  $\pm 1\%$ .
- **Mobile Link® Wi-Fi Connectivity:** Honeywell standby generators are Wi-Fi enabled. Now users can remotely connect and monitor status on a smartphone, tablet, or PC from anywhere in the world using Mobile Link's free service.
- **Honeywell Transfer Switches:** The Honeywell generator line is offered with its own transfer systems and controls for total system compatibility.
- **18 in (457 mm) Offset:** Listed and labeled by the Southwest Research Institute allowing installation as close as 18 in (457 mm) to a structure.\*

\*Must be located away from doors, windows, and fresh air intakes and in accordance with local codes.



## FEATURES & BENEFITS

- |   |   |                                |   |
|---|---|--------------------------------|---|
| • PrecisionPower™ Electrical Technology   | • Electronic governor                                     | • Flexible fuel line connector | • Natural gas or LP gas operation                                 |
| • Two-line multilingual digital LCD controller (English, Spanish, French, Portuguese) | • System and status & maintenance interval LED indicators | • WhisperCheck™ exercise       | • 5 Year premium limited warranty                                 |
| • Standard Wi-Fi™ connectivity available on -1 models                                 | • Base fascia   | • Aluminum enclosure           | • Capability to be installed within 18 in (457 mm) of a building* |

\* Only if located away from doors, windows, and fresh air intakes, unless otherwise directed by local codes.

## 9 & 11 kW Technical Specifications

### ENGINE

**WhisperCheck™ Exercise:** Greatly reduces sound output and fuel consumption during weekly, bi-weekly, or monthly exercise.

**Generac G-Force design:** Maximizes engine "breathing" for increased fuel efficiency. Plateau honed cylinder walls and plasma moly rings help the engine run cooler, reducing oil consumption and resulting in longer engine life.

**"Spiny-lok" cast iron cylinder walls:** Rigid construction and added durability provide long engine life.

**Electronic ignition/spark advance:** These features combine to assure smooth, quick starting every time.

**Full pressure lubrication system:** Pressurized lubrication to all vital bearings means better performance, less maintenance, and longer engine life. Now featuring up to a 2 year/200 hour oil change interval.

**Low oil pressure shutdown system:** Shutdown protection prevents catastrophic engine damage due to low oil.

**High temperature shutdown:** Prevents damage due to overheating.

### GENERATOR

**Test criteria:** Prototype tested; system torsional tested; NEMA MG1-22 evaluation; motor starting ability.

**Revolving field:** Allows for a smaller, light weight unit that operates 25% more efficiently than a revolving armature generator.

**Skewed stator:** Produces a smooth output waveform for compatibility with electronic equipment.

**Displaced phase excitation:** Maximizes motor starting capability.

**Automatic voltage regulation:** Regulating output voltage to  $\pm 1\%$  prevents damaging voltage spikes.

**UL 2200 listed:** For your safety.

### TRANSFER SWITCH

Sold separately.

### MOBILE LINK® WI-FI CONNECTIVITY

Free with select Honeywell home standby generators.

**Ability to view generator status:** Monitor the generator with a smartphone, tablet, or computer at any time with the Mobile Link application for complete peace of mind.

**Ability to view generator Exercise/Run and Total Hours:** Review the generator's complete protection profile for exercise hours and total hours.

**Ability to view generator maintenance information:** Provides maintenance information for the specific model generator when scheduled maintenance is due.

**Monthly report with previous month's activity:** Detailed monthly reports provide historical generator information.

### Ability to view generator battery information:

Built-in battery diagnostics display current state of the battery.

**Weather information:** Provides detailed local ambient weather conditions for the generator's location.

### SYNC™ 3.0 CONTROLS

**AUTO/MANUAL/OFF illuminated buttons:** Select the operating mode and provide easy, at-a-glance status indication of any condition.

**Two-line plain text multilingual LCD:** Provides homeowners with easily visible logs of history, maintenance, and events, up to 50 occurrences.

**Sealed, raised buttons:** Smooth, weather-resistant user interface for programming and operations.

**Utility voltage sensing:** Constantly monitors utility voltage, setpoints 65% dropout, 80% pick-up of standard voltage.

**Generator voltage sensing:** Constantly monitors generator voltage to verify the cleanest power is delivered to the home.

**Utility interrupt delay:** Prevents nuisance start-ups of the engine. Adjustable 2–1500 seconds by a qualified dealer (five second factory default).

**Engine warm-up:** Verifies engine is ready to assume load; setpoint approximately one minute.

**Programmable exerciser:** Operates engine to prevent oil seal drying and damage between power outages by running the generator for five minutes every other week. Also offers a selectable setting for weekly, bi-weekly, or monthly operation, providing flexibility and lower fuel costs to the owner.

**Smart battery charger:** Delivers charge to the battery only when needed at varying rates, depending on outdoor air temperature. Compatible with lead acid and AGM-style batteries.

**Electronic governor:** Maintains constant 60 Hz frequency.

### UNIT

#### SAE aluminum weather protective enclosure:

Sound attenuated enclosure provides quiet operation and weather protection, able to withstand winds up to 150 mph (241 km/h). Hinged key locking roof panel for security. Lift-out front panel for easy access to all routine maintenance items. Electrostatically applied textured epoxy paint for added durability.

**Enclosed critical grade muffler:** Quiet, critical grade muffler is mounted inside the unit to prevent injuries.

**Small, compact, attractive:** Makes for an easy, eye appealing installation, as close as 18 in (457 mm) away from a structure.

### INSTALLATION SYSTEM

#### 14 in (35.6 cm) flexible fuel line connector:

Listed ANSI Z21.75/CSA 6.27 outdoor appliance connector for the required connection to the gas supply piping.

**Integral sediment trap:** Meets IFGC and NFPA 54 installation requirements.

## 9 & 11 kW Technical Specifications

GENERATOR	G007057-0/-1 (9 KW)	G007058-0/-1 (11 KW)
Rated maximum continuous power capacity (LP)	9,000 Watts*	11,000 Watts*
Rated maximum continuous power capacity (NG)	8,000 Watts*	10,000 Watts*
Rated voltage	240	
Rated maximum continuous load current – 240V (LP / NG)	37.5 / 33.3	45.8 / 41.7
Total Harmonic Distortion	Less than 5%	
Main line circuit breaker	40 amp	50 amp
Phase	1	
Number of rotor poles	2	
Rated AC frequency	60 Hz	
Power factor	1.0	
Battery requirement (not included)	12 volts, Group 26R 540 CCA minimum or Group 35AGM 650 CCA minimum	
Unit weight (lb / kg)	340 / 154	348 / 158
Dimensions (L x W x H) (in / cm)	48 x 25 x 29 / 121.9 x 63.5 x 73.7	
Sound output in dB(A) at 23 ft (7 m) with generator operating at normal load**	63	64
Sound output in dB(A) at 23 ft (7 m) with generator in WhisperCheck™ low speed exercise	54	58
ENGINE		
Engine type	GENERAC G-FORCE 400 SERIES	GENERAC G-FORCE 500 SERIES
Number of cylinders	1	2
Displacement	426 cc	530 cc
Cylinder block	Aluminum w/ cast iron sleeve	
Valve arrangement	Overhead valve	
Ignition system	Solid-state w/ magneto	
Governor system	Electronic	
Compression ratio	9.0:1	9.5:1
Starter	12 VDC	
Oil capacity, including filter	Approx 1.1 qt / 1.0 L	Approx. 1.7 qt / 1.6 L
Operating rpm	3,600	
Fuel consumption		
Natural gas: ft <sup>3</sup> /hr (m <sup>3</sup> /hr)		
1/2 load	90 (2.55)	107 (3.03)
Full load	120 (3.40)	159 (4.50)
Liquid propane: ft <sup>3</sup> /hr (gal/hr) [L/hr]		
1/2 load	32 (0.87) [3.29]	44 (1.22) [4.62]
Full load	50 (1.37) [5.20]	72 (1.97) [7.45]
<b>Note: Fuel pipe must be sized for full load.</b> Required fuel pressure to generator fuel inlet – 3.5–7.0 in water column (0.87–1.74 kPa) for natural gas, 10–12 in water column (2.49–2.99 kPa) for LP gas. For BTU content, multiple ft <sup>3</sup> /hr x 2,500 (LP) or ft <sup>3</sup> /hr x 1,000 (NG). For Megajoule content, multiply m <sup>3</sup> /hr x 93.15 (LP) or m <sup>3</sup> /hr x 37.26 (NG).		


## 9 & 11 kW Technical Specifications

CONTROLS	
Two-line plain text multilingual LCD	Simple user interface for ease of operation
Mode buttons: AUTO	Automatic start on utility failure. 7 day exerciser
MANUAL	Start with starter control, unit stays on. If utility fails, transfer to load takes place.
OFF	Stops unit. Power is removed. Controller and charger still operate.
Ready to Run/Maintenance messages	Standard
Engine Run Hours indication	Standard
Programmable start delay between 2–1500 seconds	Standard (dealer programmable only)
Utility voltage loss/Return to utility adjustable (brownout settings)	From 140–171 V / 190–216 V
Future set capable exerciser/Exercise set error warning	Standard
Run/Alarm/Maintenance logs	50 events each
Engine start sequence	Cyclic cranking: 16 sec on, 7 sec rest (90 sec maximum duration)
Starter lock-out	Starter cannot re-engage until 5 sec after engine has stopped
Smart battery charger	Standard
Charger Fault/Missing AC warning	Standard
Low Battery/Battery Problem protection and Battery Condition indication	Standard
Automatic voltage regulation with over and under voltage protection	Standard
Under-frequency/overload/stepper overcurrent protection	Standard
Safety fused/fuse problem protection	Standard
Automatic Low Oil Pressure/High Oil Temperature Shutdown	Standard
Overcrank/Overspeed (@ 72 Hz)/rpm Sense Loss Shutdown	Standard
High Engine Temperature Shutdown	Standard
Internal fault/incorrect wiring protection	Standard
Common external fault capability	Standard
Field upgradable firmware	Standard
<p>**Sound levels are taken from the front of the generator. Sound levels taken from other sides of the generator may be higher depending on installation parameters.</p> <p>Rating definition – Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating.</p> <p>(All ratings in accordance with BS5514, ISO3046, and DIN6271). *Maximum wattage and current are subject to and limited by factors such as fuel BTU (Megajoule) content, ambient temperatures, altitude, engine power and condition, etc. Maximum power decreases approximately 3.5% for each 1,000 ft (304.8 m) above sea level, and will also decrease approximately 1% for each 10 °F (6 °C) above 60 °F (16 °C).</p>	

## 9 & 11 kW Available Accessories

MODEL #	PRODUCT	DESCRIPTION
G007005-0	Wi-Fi™ LP Fuel Level Monitor	The Wi-Fi enabled LP tank fuel level monitor provides constant monitoring of the connected LP fuel tank. Monitoring the LP tank fuel level is an important step in verifying the generator is ready to run during an unexpected power failure. Status alerts are available through a free application to notify users when the LP fuel tank is in need of a refill.
G005819-0	26R Wet Cell Battery	Every standby generator requires a battery to start the system. The recommended 26R wet cell battery is for use with all air-cooled standby products.
G007101-0	Battery Pad Warmer	The pad warmer rests under the battery. Recommended for use if the temperature regularly falls below 0 °F (-18 °C). (Not necessary for use with AGM-style batteries.)
G007102-0	Oil Warmer	The oil warmer slips directly over the oil filter. Recommended for use if the temperature regularly falls below 0 °F (-18 °C).
G007103-1	Breather Warmer	The breather warmer is for use in extreme cold weather applications. For use with Sync™ controllers only in climates where heavy icing occurs.
G005621-0	Auxiliary Transfer Switch Contact Kit	The auxiliary transfer switch contact kit allows the transfer switch to lock out a single large electrical load that may not be needed.
G006160-0	Touch-Up Paint Kit	If the generator enclosure is scratched or damaged, it is important to touch-up the paint to protect it from future corrosion. The touch-up paint kit includes the necessary paint to correctly maintain or touch-up a generator enclosure.
G006482-0 (9 kW) G006483-0 (11 kW)	Scheduled Maintenance Kit	Scheduled maintenance kits provide all the items necessary to perform complete routine maintenance on a Honeywell automatic standby generator (oil not included).
G007001-0 (50 AMP) G007006-0 (100 AMP)	Smart Management Module	Smart Management Modules (SMM) are used to optimize the performance of a standby generator. They manage large electrical loads upon startup and shed them to aid in recovery when overloaded. In many cases, using SMM's can reduce the overall size and cost of the system.
G007169-0	Mobile Link® 4G LTE Cellular Accessory	Mobile Link 4G LTE Cellular Accessory allows users to monitor the status of the generator from anywhere in the world using a smartphone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account to your authorized service dealer for fast, friendly, and proactive service. With Mobile Link, users are taken care of before the next power outage.

## Dimensions and UPCs

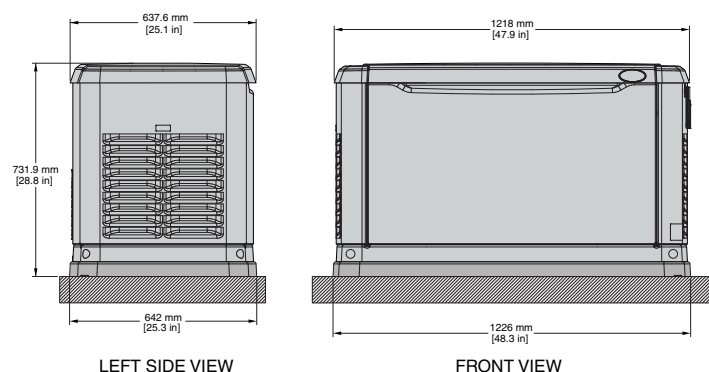

MODEL	UPC
G007057-0	696471070576
G007057-1	696471074222
G007058-0	696471070583
G007058-1	696471074239

©2019 Generac Power Systems, Inc. All rights reserved.  
Specifications subject to change without notice.

### Generac Power Systems, Inc.

S45 W29290 Hwy 59  
Waukesha, WI. 53189  
1.855.GEN.INFO  
www.honeywellgenerators.com

The Honeywell trademark is used under license from Honeywell International Inc.  
Honeywell International Inc. makes no representation or warranties with respect to this product. This product is manufactured by Generac Power Systems, Inc., Waukesha, WI. 53189, USA.

10000000217 | Rev G | 10/19

**Honeywell**