

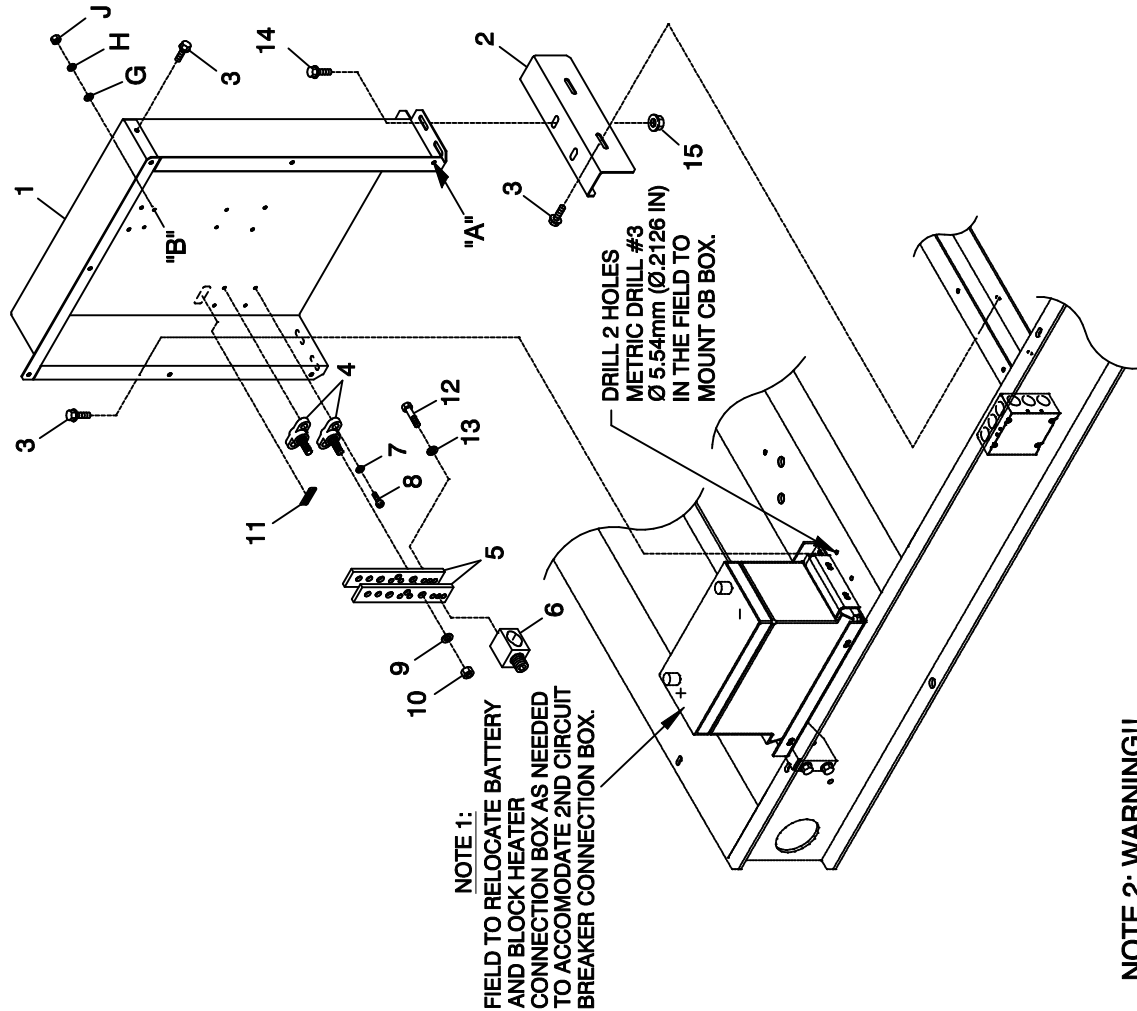


GROUP A

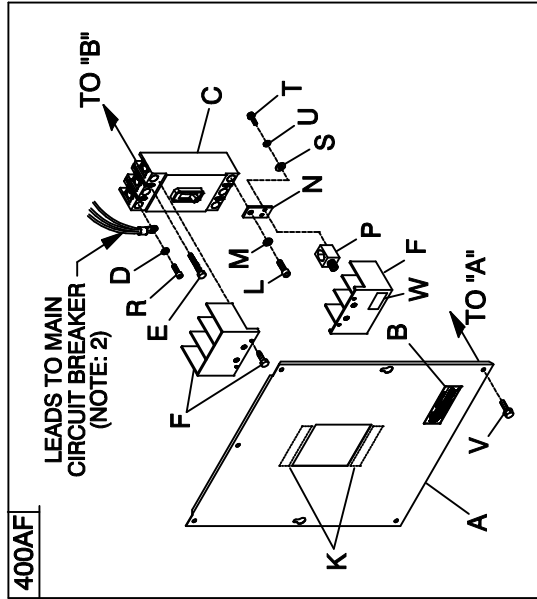

NOTE 2: WARNING!!

INSTALLER TO SUPPLY, ROUTE AND CONNECT LEADS FROM MAIN CIRCUIT BREAKER AND NEUTRAL TO 2nd CIRCUIT BREAKER AND NEUTRAL AS NECESSARY. INSTALLER IS RESPONSIBLE FOR MAINTAINING COMPLIANCE WITH ALL NATIONAL, STATE AND LOCAL CODES AND REGULATIONS PERTAINING TO THIS INSTALLATION. THIS MAY REQUIRE REPLACING THE EXISTING MAIN LINE CIRCUIT BREAKER WITH A SMALLER CIRCUIT BREAKER. CONTACT FACTORY FOR OTHER AVAILABLE CIRCUIT BREAKERS.

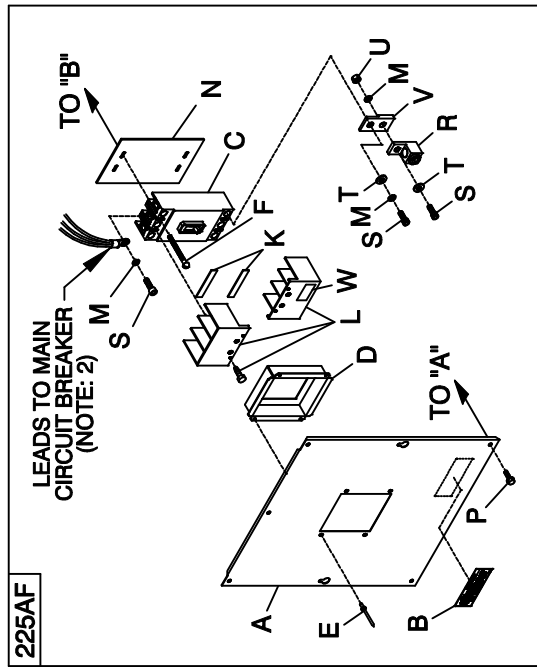

EXPLODED VIEW:
CONNECTION BOX 225/400AF
DRAWING #: 0G2683D

EXPLODED VIEW: CONNECTION BOX 225/400AF

DRAWING #: 0G2683D

GROUP A

APPLICABLE TO:

ITEM	PART #	QTY.	DESCRIPTION
1	0G26410GS0R	1	BOX 2ND CB 225/400AF WIDE
	0G26510GS0R	1	BOX 2ND CB 225/400AF NARROW
2	0G26250ST03	1	BRACKET 2ND CB BOX 5.4L 1800
3	0C2454	8	SCREW THF M6-1 X 16 N WA Z/JS
4	057073	2	JUNCTION BLOCK 3/8-16
5	0D5466	2	BUSBAR NEUTRAL BLOCK 390
6	0A7822	1	LUG SLDLSS 600/250-1/0 X 1/4-28
7	049226	4	WASHER LOCK M5
8	0C2266	4	SCREW PHTT M5-0.8 X 16 ZYC
9	022237	2	WASHER LOCK 3/8
10	022241	2	NUT HEX 3/8-16 STEEL
11	0A9457	1	DECAL NEUTRAL
12	045335	2	SCREW HHC 1/4-28 X 3/4 G5
13	083896	2	WASHER LOCK 1/4-M6 SS
14	0C8566	2	SCREW HHFC M6-1.0 X 20 G8.8
15	052857	2	NUT TOP LOCK FL M6-1.0
UL CIRCUIT BREAKER (225AF)			
A	0F4185	1	COVER CB C2-C4 225AF
	0G26650GS0R	1	COVER 2ND CB 225AF 5.4L 1800
B	065469	1	DECAL DANGER HIGH VOLTAGE
C	0F4147	1	CB 0100A 3P 480V 225AF
	0F4151	1	CB 0200A 3P 480V 225AF
	0F4143	1	CB 0040A 3P 480V 225AF
	0F4145	1	CB 0060A 3P 480V 225AF
D	0F4186	1	COVER CB DISH 225AF
E	036261	4	RIVET POP .125 X .275 SS
F	053640	4	SCREW RHM #8-32 X 3-1/4
G	038150	4	WASHER FLAT #8 ZINC
H	022264	4	WASHER LOCK #8-M4
J	022471	4	NUT HEX #8-32 STEEL
K	029289	2	TAPE ELEC 1/2 FOAM
L	W/CB	2	TERMINAL COVER CB W/HDWR
M	022129	9	WASHER LOCK M8-5/16
N	0F8432	1	INSULATOR CB 225AF
P	0C2454	7	SCREW THF M6-1 X 16 N WA Z/JS
R	0F8451	3	LUG SLDLSS 300 MCM-6 AL/CU
S	049897	9	SCREW SHC M8-1.25 X 20 G8
T	022145	6	WASHER FLAT 5/16-M8 ZINC
U	045771	3	NUT HEX M8-1.25 G8 CLEAR ZINC
V	0F8843	3	BUS BAR 200A LUG ADAPTOR
W	0G3259	1	DECAL TERMINAL SHOCK HZD BI
UL CIRCUIT BREAKER (400AF)			
A	0F4187	1	COVER CB C2-C4 400AF
	0G26640GS0R	1	COVER 2ND CB 400AF 5.4L 1800
B	065469	1	DECAL DANGER HIGH VOLTAGE
C	0F4154	1	CB 0300A 3P 480V 400AF
	0F4155	1	CB 0400A 3P 480V 400AF
D	046526	3	WASHER LOCK M10
E	042419	4	SCREW RHM 10-32 X 4
F	W/CB	2	TERMINAL COVER CB W/HDWR
G	023897	4	WASHER FLAT #10 ZINC
H	022152	4	WASHER LOCK #10
J	022158	4	NUT HEX #10-32 STEEL
K	029289	2	TAPE ELEC 1/2 FOAM
L	052647	3	SCREW SHC M10-1.5 X 25 G12.9
M	046526	3	WASHER LOCK M10
N	W/CB	3	BUS BAR CB ADAPTER 225-400A
P	0A7822	3	LUG SLDLSS 600/250-1/0 X 1/4-28
R	052647	3	SCREW SHC M10-1.5 X 25 G12.9
S	022473	6	WASHER FLAT 1/4-M6 ZINC
T	023334	6	SCREW HHC 1/4-28 X 1/2 G5
U	022097	6	WASHER LOCK M6-1/4
V	0C2454	7	SCREW THF M6-1 X 16 N WA Z/JS
W	0G3259	1	DECAL TERMINAL SHOCK HZD BI