


RADIATOR/EXHAUST
DISCHARGE AIR
(BOTH SIDES)

AIR INTAKE
(BOTH SIDES)

REMOVE COVER
FOR ACCESS TO
RADIATOR FILL CAP

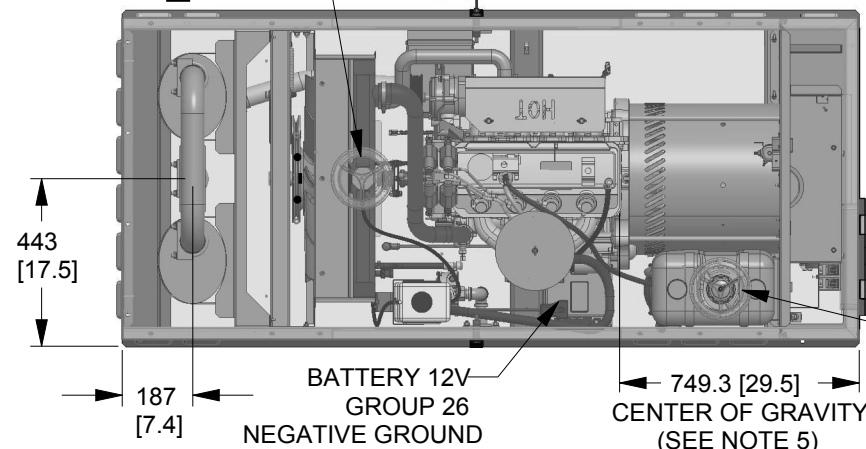


TOP VIEW

EXHAUST MUFFLER
ENCLOSED WITHIN
GENERATOR ENCLOSURE

CIRCUIT BREAKER
SEE NOTE 3

RADIATOR/EXHAUST
DISCHARGE AIR

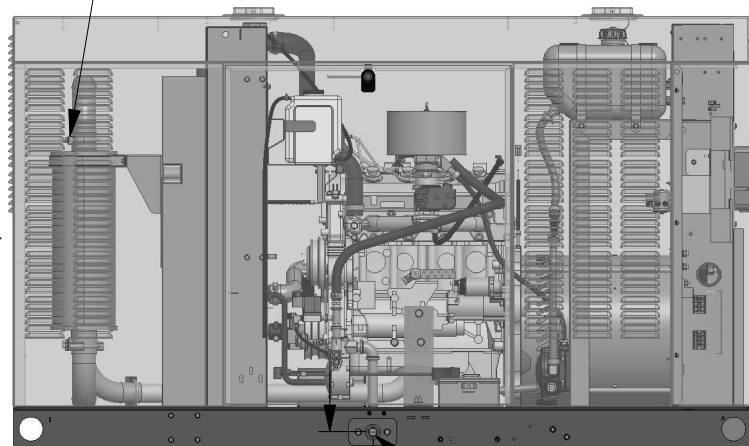

LEFT SIDE VIEW

1171 [46.1]
OVERALL HEIGHT

888 [35.0]
OVERALL WIDTH
REAR VIEW

REAR ENCLOSURE
COVER PANEL
SEE NOTE 4


CUSTOMER ACCESS
ASSEMBLY, CONTROL
PANEL ACCESS,
BATTERY CHARGER
LOCATED WITHIN
SEE NOTE 4

58 [2.3]
TYP

47 [1.8]

759 [29.9]
DOOR TYP

VICE ACTION LATCH,
ONE PER DOOR,
ONE LIFT OFF
DOOR PER SIDE
OF GENERATOR

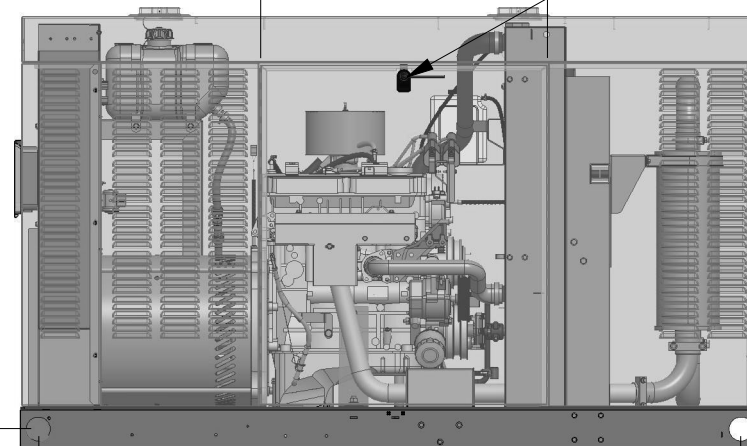

| SERVICE ITEM | 2.4L |
|---|-------------|
| OIL FILL CAP | EITHER SIDE |
| OIL DIP STICK | RIGHT SIDE |
| OIL FILTER | RIGHT SIDE |
| OIL DRAIN HOSE | RIGHT SIDE |
| RADIATOR DRAIN HOSE | LEFT SIDE |
| COOLANT RECOVERY BOTTLE | LEFT SIDE |
| RADIATOR FILL CAP | ROOF TOP |
| AIR CLEANER ELEMENT | LEFT SIDE |
| SPARK PLUGS | LEFT SIDE |
| MUFFLER | SEE NOTE 11 |
| DRIVE BELT | EITHER SIDE |
| FAN BELT | SEE NOTE 11 |
| BATTERY | LEFT SIDE |
| LUBE OIL MAINTAINER SUPPLY TANK FILL CAP | ROOF TOP |

REFERENCE OWNERS MANUAL
FOR PERIODIC REPLACEMENT
PART LISTINGS.

REMOVE COVER FOR
ACCESS TO LUBE OIL
MAINTAINER SUPPLY TANK
REFERENCE OWNERS MANUAL

NOTES:

1. MINIMUM RECOMMENDED CONCRETE PAD SIZE IS 6" OFFSET OF OVERALL LENGTH AND WIDTH OF GENERATOR. {1193.8 (47") WIDE X 2255.5 (88.8") LONG}. REFERENCE INSTALLATION GUIDE SUPPLIED WITH THE UNIT FOR CONCRETE PAD GUIDELINES. REFERENCE MANUFACTURER'S SPECIFICATIONS IF USING ENGINEERED, PREFABRICATED SLABS.
2. ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE, AND LOCAL CODES.
3. CONTROL PANEL / CIRCUIT BREAKER INFORMATION:
 - SEE SPECIFICATION SHEET OR OWNERS MANUAL
 - ACCESSIBLE THROUGH CUSTOMER ACCESS ASSEMBLY DOOR ON REAR OF GENERATOR.
4. REMOVE THE REAR ENCLOSURE COVER PANEL TO ACCESS THE STUB-UP AREAS AS FOLLOWS:
 - HIGH VOLTAGE CONNECTION INCLUDING AC LOAD LEAD CONDUIT CONNECTION NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (0.5 AMP MAX) CONNECTION.
 - LOW VOLTAGE CONNECTION INCLUDING TRANSFER SWITCH CONTROL WIRES.
5. CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
6. BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INTRUSION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
7. REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
8. MOUNTING BOLTS OR STUDS TO MOUNTING SURFACE SHALL BE 5/8-11 GRADE 5 (USE STANDARD SAE TORQUE SPECS)
9. MUST ALLOW FREE FLOW OF INTAKE AIR, DISCHARGE AIR AND EXHAUST. SEE SPEC SHEET FOR MINIMUM AIR FLOW AND MAXIMUM RESTRICTION REQUIREMENTS.
10. GENERATOR MUST BE INSTALLED SUCH THAT FRESH COOLING AIR IS AVAILABLE AND THAT DISCHARGE AIR FROM RADIATOR IS NOT RECIRCULATED.
11. EXHAUST MUFFLER AND FAN BELT ENCLOSED WITHIN GENERATOR ENCLOSURE, REMOVE FRONT PANEL TO ACCESS.

DRAWING CREATED FROM PRO/ENGINEER
3D FILE. ECO MODIFICATION TO BE
APPLIED TO SOLID MODEL ONLY.

WEIGHT DATA

| ENGINE/KW | ENCLOSURE MATERIAL | WEIGHT GENSET ONLY KG [LBS] | WEIGHT SHIPPING SKID KG [LBS] | SHIPPING WEIGHT KG [LBS] |
|-----------|--------------------|-----------------------------|-------------------------------|--------------------------|
| 2.4L 36KW | ST | 569 [1255] | 44 [98] | 613 [1353] |
| 2.4L 36KW | AL | 545 [1202] | 44 [98] | 590 [1300] |
| 2.4L 45KW | ST | 596 [1313] | 44 [98] | 640 [1411] |
| 2.4L 45KW | AL | 572 [1260] | 44 [98] | 616 [1358] |

DIMENSIONS: MM [INCH]

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS. ©GENERAC POWER SYSTEMS 2013

ELECTRONICALLY APPROVED
INSIDE WINDCHILL

GENERAC

TITLE

INSTALL CPL PROT G2.4L C2
36/45KW

ISSUE DATE:

SIZE
B

CAGE NO
N/A

DWG NO

0K8636

REV
D

SCALE

0.050

WT-KG

SEE ABOVE


SHEET

1 of 2

INSTALLATION DRAWING


B

B

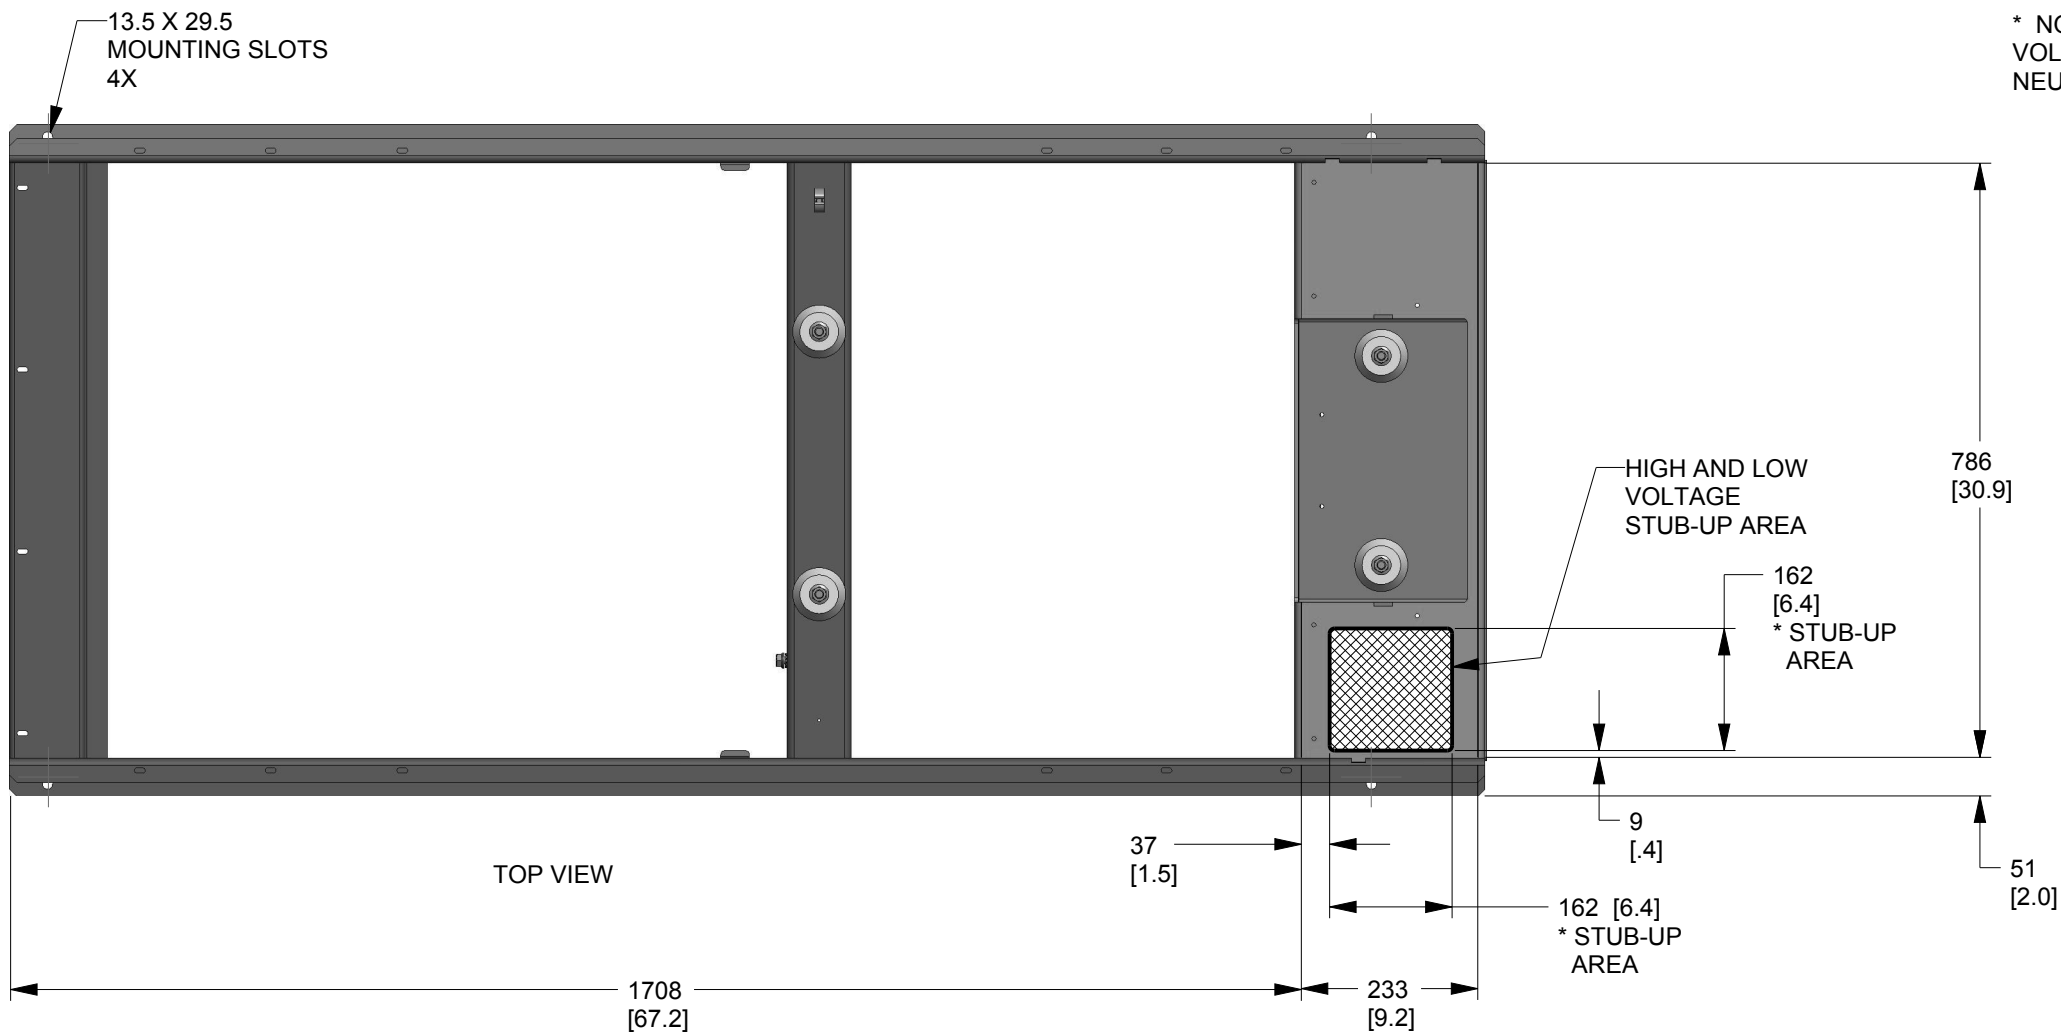

A

A

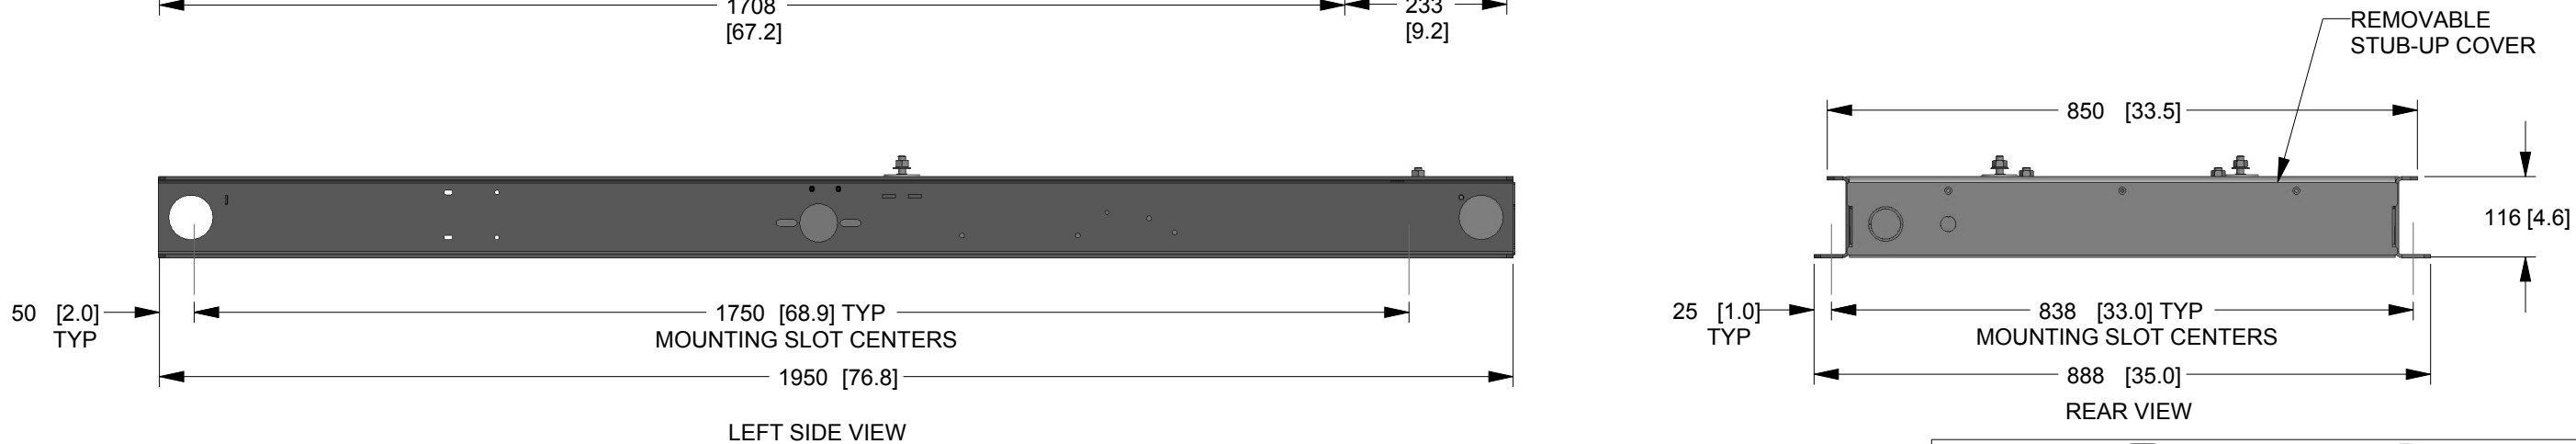

DRAWING CREATED FROM PRO/ENGINEER 3D FILE. ECO MODIFICATION TO BE APPLIED TO SOLID MODEL ONLY.

INSTALLATION DRAWING

DIMENSIONS: MM [INCH]

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS. ©GENERAC POWER SYSTEMS 2013

ELECTRONICALLY APPROVED
INSIDE WINDCHILL



| | | | | |
|--------------------------------------|----------------|------------------|----------|--------|
| TITLE | | | | |
| INSTALL CPL PROT G2.4L C2 36/45KW | | | | |
| ISSUE DATE: | | | | |
| SIZE B | CAGE NO N/A | DWG NO 0K8636 | REV D | |
| SCALE 0.100 | WT-KG | SEE SHEET 1 | SHEET | 2 of 2 |