


# GROUP A

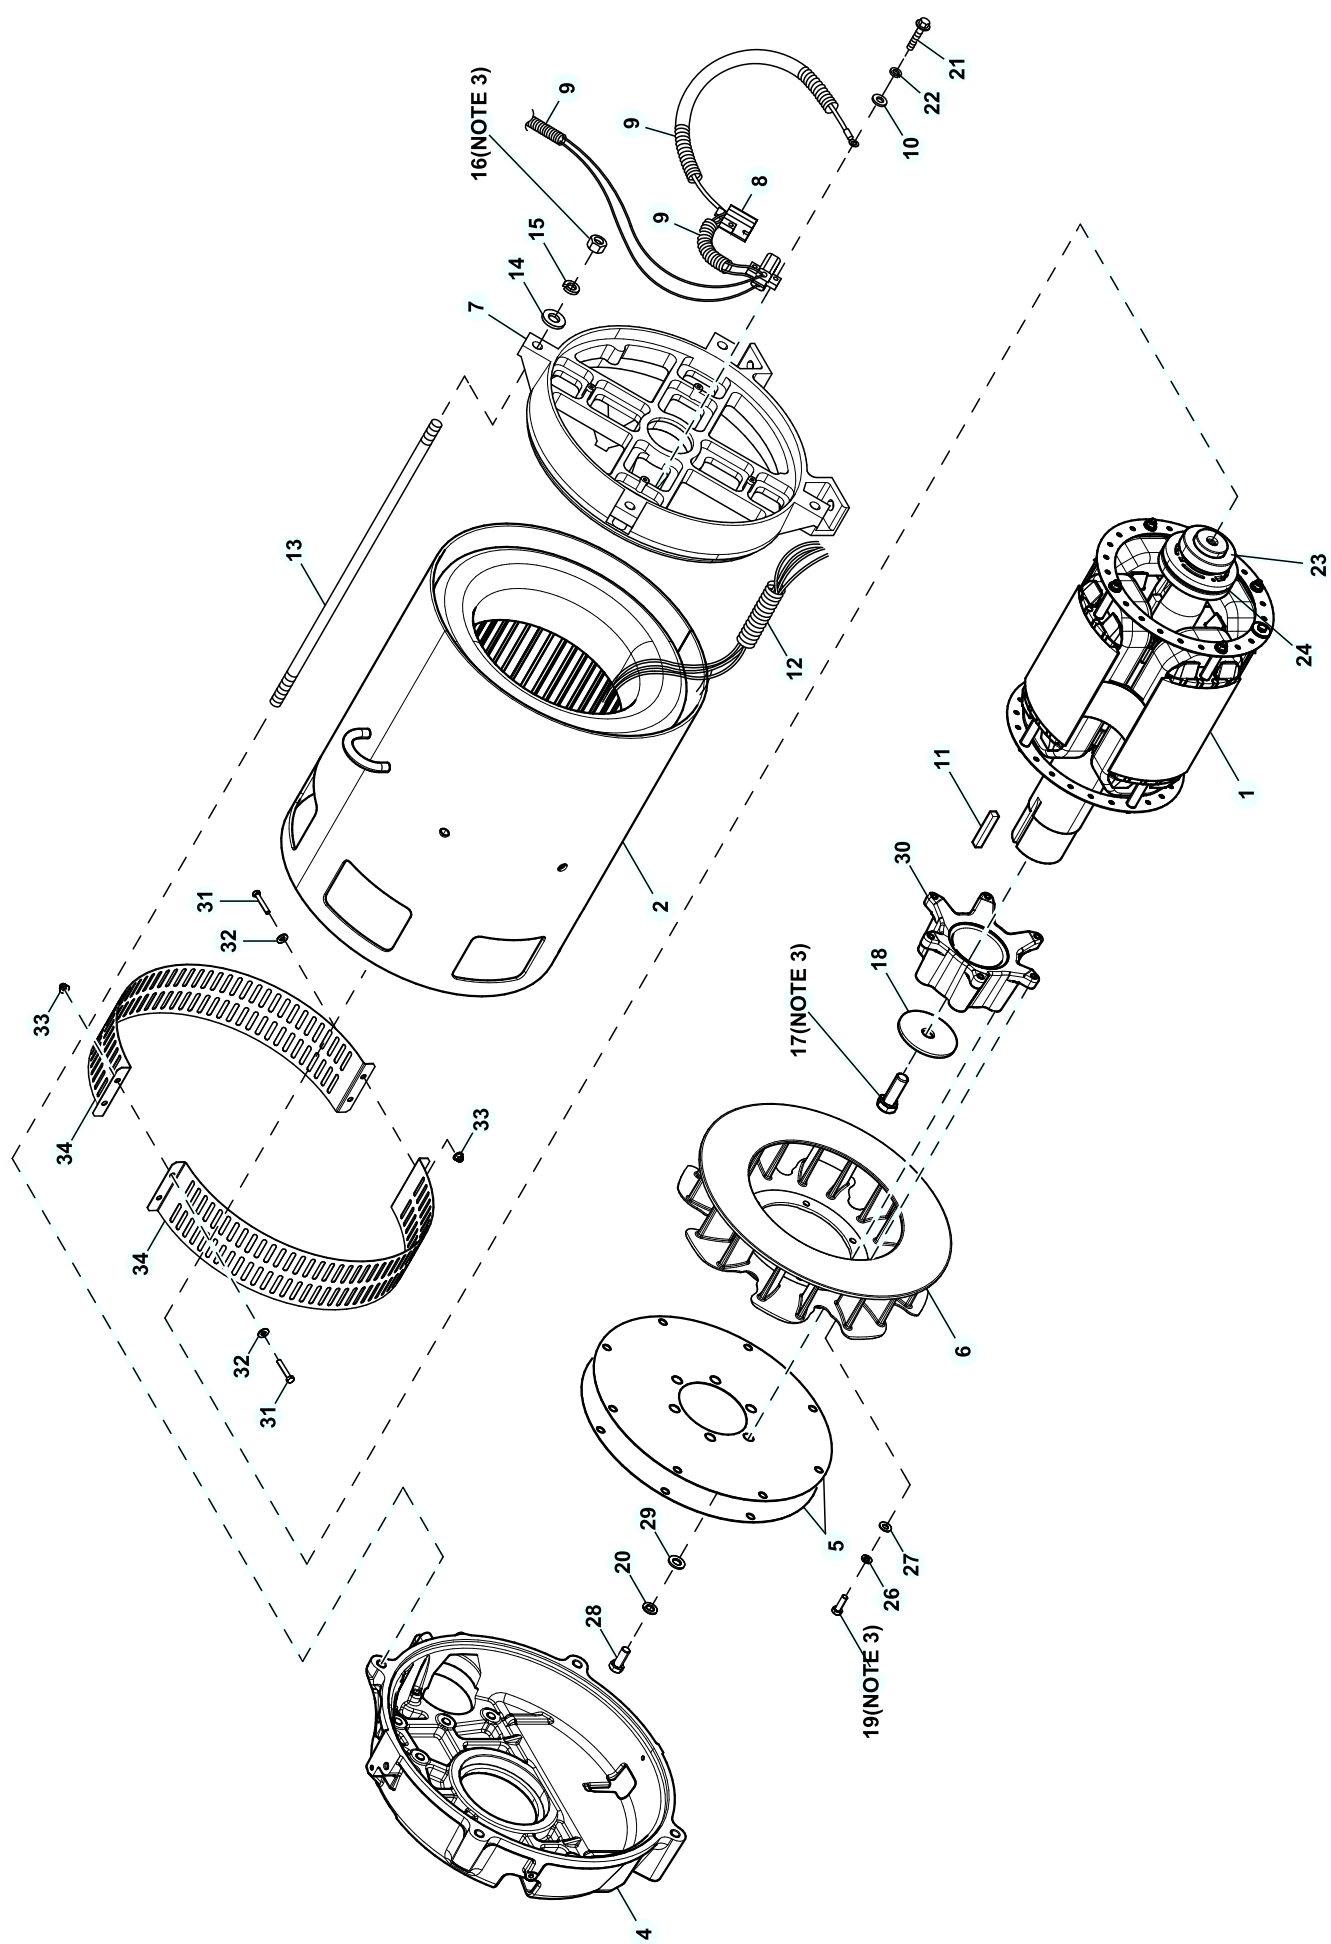

## EXPLODED VIEW: EV ALTCOMPRT G4.5L C2

DRAWING #: A0000148667

## GROUP D

| ITEM  | PART#       | QTY. | DESCRIPTION                            |
|-------|-------------|------|----------------------------------------|
| 1     | A0000115958 | 1    | RTR 390 48AD1 CPL PROT GAS 2019        |
| 2     | A0000115973 | 1    | STR 390 48AD1 PROT GAS 2019            |
|       | A0000191835 | 1    | STR 390 48GD1 PROT GAS 2019            |
|       | A0000243983 | 1    | STR 390 48KD1 PROT GAS 2019            |
|       | A0000291994 | 1    | STR 390 48JD1 PROT GAS 2019            |
| 3     | 0C9708      | REF  | INSTR HYPOT TEST (NOT SHOWN)           |
| 4     | 10000036241 | REF  | HOUSING FLYWHEEL MACHINING CPL         |
| 5     | 0A8240      | 2    | FLEX PLATE SAE10                       |
| 6     | 0G0724      | 1    | FAN MACHINED 390 SAE ALTERATOR         |
| 7     | 0E5706      | 1    | REAR BEARING CARRIER 390/DRCT          |
| 8     | 0F7874A     | 1    | ASSY BRUSH HOLDER 390/HSB              |
| 9     | 077043A     | 1    | CONDUIT FLEX .38" ID (60")             |
| 10    | G038150     | 4    | WASHER FLAT #8 ZINC                    |
| 11    | 0G1929      | 1    | KEY SQ 3/8 X 2-1/4 STEEL               |
| 12    | 077043F     | 1    | CONDUIT FLEX 1.25"ID (30" LG)          |
| 13    | 04576100CH  | 4    | STUD M14-2.0 X 600 G5 ZINC             |
| 14    | G052646     | 4    | WASHER FLAT M14                        |
| 15    | G043123     | 4    | WASHER LOCK M14                        |
| 16    | G051779     | 4    | NUT HEX M14-2.0 G8 YEL CHR             |
| (2)17 | 0A2601      | 1    | SCREW HHC M16-2.0 X 45 G8.8            |
| 18    | 0A2602      | 1    | WASHER FLAT .688ID X 3.25OD            |
| (2)19 | 0A8258      | 6    | SCREW HHC M8-1.25 X 25 C10.9           |
| 20    | G051769     | 6    | WASHER LOCK M12                        |
| 21    | 0C3992      | 4    | SCREW HHTT M4-0.7 X 16 BP              |
| 22    | G022264     | 4    | WASHER LOCK #8-M4                      |
| (1)23 | G047248     | 1    | BALL BEARING-45 MM                     |
| (1)24 | G070892     | 1    | SLIP RING MACHINED                     |
| 25    | 029333A     | 1    | TIE WRAP UL 7.4"X .19" BLK (NOT SHOWN) |
| 26    | G022129     | 6    | WASHER LOCK M8-5/16                    |
| 27    | G022145     | 6    | WASHER FLAT 5/16-M8 ZINC               |
| 28    | G063837     | 6    | SCREW HHC M12-1.75 X 30 C10.9C         |
| 29    | G049808     | 6    | WASHER FLAT M12                        |
| 30    | A0000100190 | 1    | COUPLER 390 SAE PD                     |
| 31    | G049721     | 4    | SCREW HHC M6-1.0 X 35 C8.8 CLR         |
| 32    | G022473     | 4    | WASHER FLAT 1/4-M6 ZINC                |
| 33    | 0D3700      | 4    | NUT FLANGE M6-1.0 NYLOK                |
| 34    | 0K18270ST03 | 2    | SCROLL 390 ALTERNATOR                  |

## NOTES (UNLESS OTHERWISE SPECIFIED :

(1) ROTOR REPLACEMENT PARTS.

(2) APPLY MEDIUM STRENGTH BLUE THREAD LOCKING FLUID TO THREADS.

(3) TORQUE VALUES: (FOR REFERENCE ONLY)

ITEM #16 - 102 ft-lbs.

ITEM #17 - 123 ft-lbs.

ITEM #19 - 20 ft-lbs.

(4) ALL STANDARD HARDWARE TO BE TORQUED PER EDS001.