


GROUP A

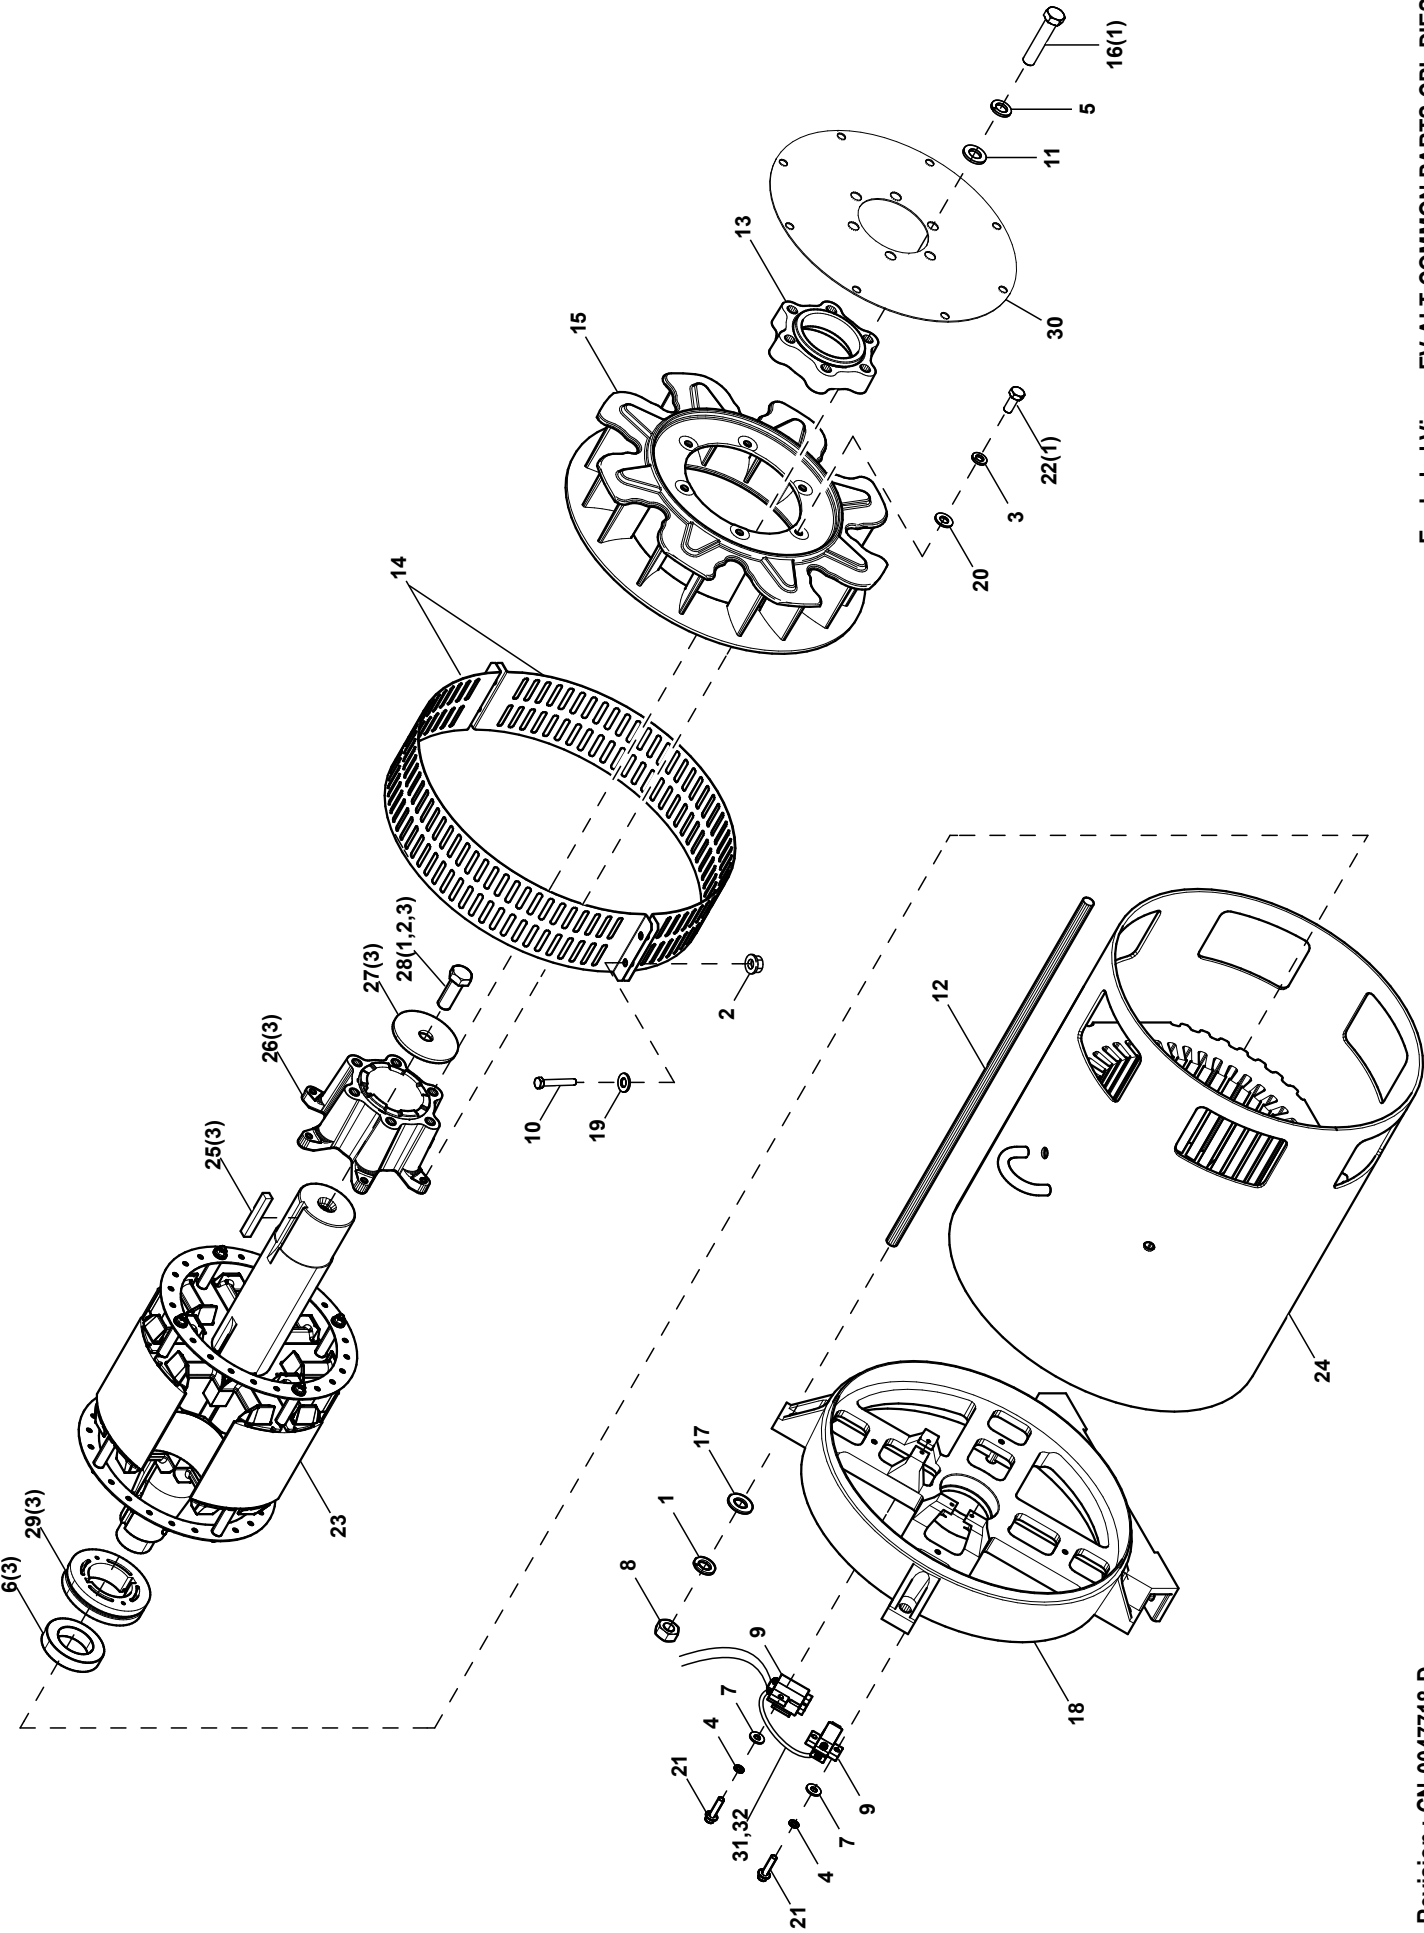

EXPLODED VIEW: EV ALT COMMON PARTS CPL DIESEL**DRAWING #:10000022649****GROUP A**

ITEM	PART#	QTY.	DESCRIPTION
1	G043123	4	WASHER LOCK M14
2	0D3700	4	NUT FLANGE M6-1.0 NYLOK
3	G022129	6	WASHER LOCK M8-5/16
4	G022264	4	WASHER LOCK #8-M4
5	G051769	6	WASHER LOCK M12
6	G047248	1	BRG BALL 45 MM
7	G038150	4	WASHER FLAT #8 ZINC
8	G051779	4	NUT HEX M14-2.0 G8 YEL CHR
9	0F7874A	1	ASSY BRUSH HOLDER 390/HSB
10	G049721	4	SCREW HHC M6-1.0 X 35 C8.8 CLR
11	G049808	6	WASHER FLAT M12
12	04576100BU	4	STUD M14-2.0 570 G5 ZINC (40-50KW)
	04576100AJ	4	STUD M14-2.0 X 520 G5 ZINC (24-30KW)
13	10000016879	2	SPACER 390 ALT-SAE 10 X 11.5 2.2L (24-30KW)
	10000016851	1	SPACER 390 ALT-SAE 10 X 11.5 3.3L (40-50KW)
14	0K18270ST03	2	SCROLL 390 ALTERNATOR
15	0G0724	1	ALTERNATER FAN
16	G068406	6	SCREW HHC M12-1.75 X 60 C10.9 (24-30KW)
	G053559	6	SCREW HHC M12-1.75 X 45 C8.8 (40-50KW)
17	G052646	4	WASHER FLAT M14
18	0E5706	1	REAR BEARING CARRIER 390/DRCT
19	G022473	4	WASHER FLAT 1/4-M6 ZINC
20	G022145	6	WASHER FLAT 5/16-M8 ZINC
21	0C3992	4	SCREW HHTT M4-0.7 X 16 BP
22	0A8258	6	SCREW HHC M8-1.25 X 25 C10.9
23	0K5197	1	RTR 390 24MD1 50HZ CPL HI EFF
	0K1557	1	RTR 390 30AD1 CPL CAGE
	0K4558	1	RTR-390-40MD1 CPL
	10000026336	1	RTR 390 48AD1 CPL PROT DIESEL
	0K3458	1	RTR 390 50GD1 CPL
24	0K5184	1	STR 390 24MD1 50HZ CPL HI EFF
	0K5142	1	STR 390 30GD1 CPL HI EFF
	0K5182	1	STR 390 30JD1 CPL HI EFF
	0K1556	1	STR 390 30AD1 CPL
	0K5183	1	STR 390 30KD1 CPL HI EFF
	0K4330	1	STR 390 40MD1 50HZ CPL
	10000026372	1	STR 390 48AD1 CPL PROT DIESEL
	0K3455	1	STR 390 50GD1 CPL
	0K3456	1	STR 390 50JD1 CPL
	0K3457	1	STR 390 50KD1 CPL
25	0A1138	1	KEY SQ 3/8 X 2-1/2 STEEL
26	G021941	1	COUPLER 390 SAE
27	0A2602	1	WASHER FLAT .688ID X 3.25OD
28	0A2601	1	SCREW HHC M16-2.0 X 45 C8.8
29	G070892	1	SLIP RING MACHINED
30	G020604	2	PLATE FLEX 11-1/2 SAE 390 (FOR D3.3L UNITS)
	0A8240	2	FLEX PLATE SAE10 (FOR D2.2L UNITS)
31	077043A	1	CONDUIT FLEX .38ID (6"LG)
32	G085662	1	TIE WRAP UL 14.6 X .14 BLK

NOTES (UNLESS OTHERWISE SPECIFIED):

(1) APPLY MEDIUM STRENGTH BLUE THREAD LOCKING FLUID TO THREADS.

(2) TORQUE VALUES (FOR REFERENCE ONLY):

I/N 16 – 83 ft/lbs.

I/N 22 – 25 ft/lbs.

I/N 28 – 144 ft/lbs.

(3) ROTOR REPLACEMENT PARTS.