

NOTES:

1. STANDARD BLOCK HEATER REQUIRES 120V AC CONNECTION
2. CONNECTION POINTS FOR AC LOAD LEADS AND ENGINE AUTOMATIC START/STOP CONTROL WIRES PROVIDED IN CONTROL PANEL.
3. 12 VOLT NEGATIVE GROUND SYSTEM
4. 2.0" I. D. FLEX EXHAUST, STANDARD WITH COMPARTMENT UNITS, OPTIONAL WITHOUT
5. MAIN LINE CIRCUIT BREAKER.


WEIGHT DATA

UNIT: 390 kg [860 lbs]


UNITS: mm [INCHES]

ENGINE SERVICE CONNECTIONS


INLET LP VAPOR = 3/4" NPT COUPLING
INLET NATURAL GAS = 3/4" NPT COUPLING
OIL DRAIN = 1/4" NPT COUPLING
EXHAUST OUTLET - 2" OD MUFFLER OUTLET

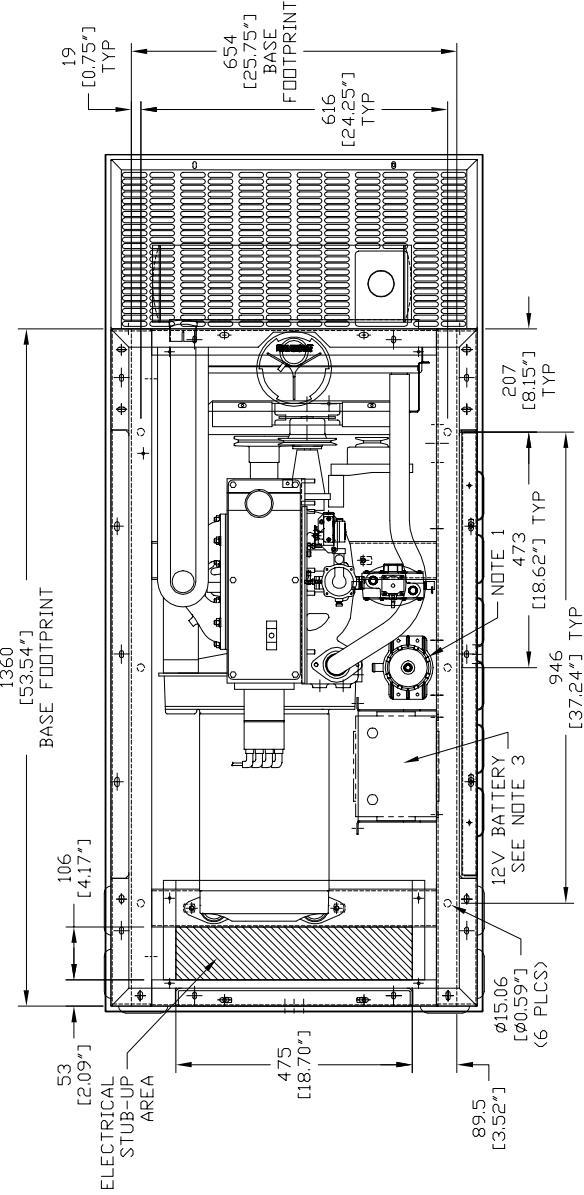

TOP VIEW

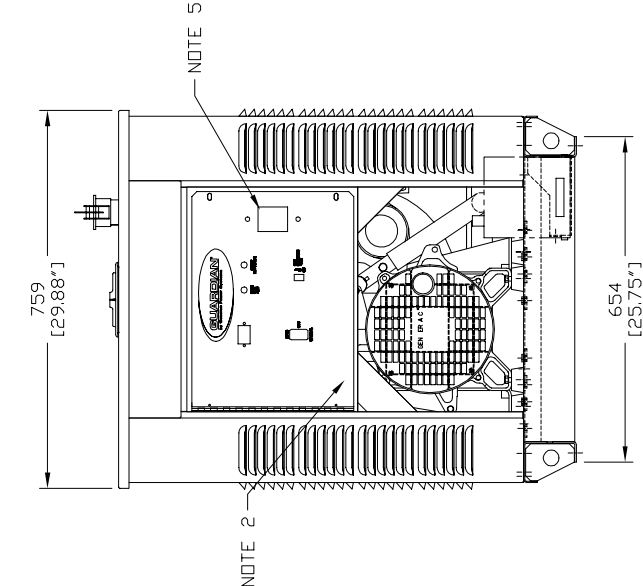

REAR VIEW
(SHOWN WITH DOOR REMOVED)

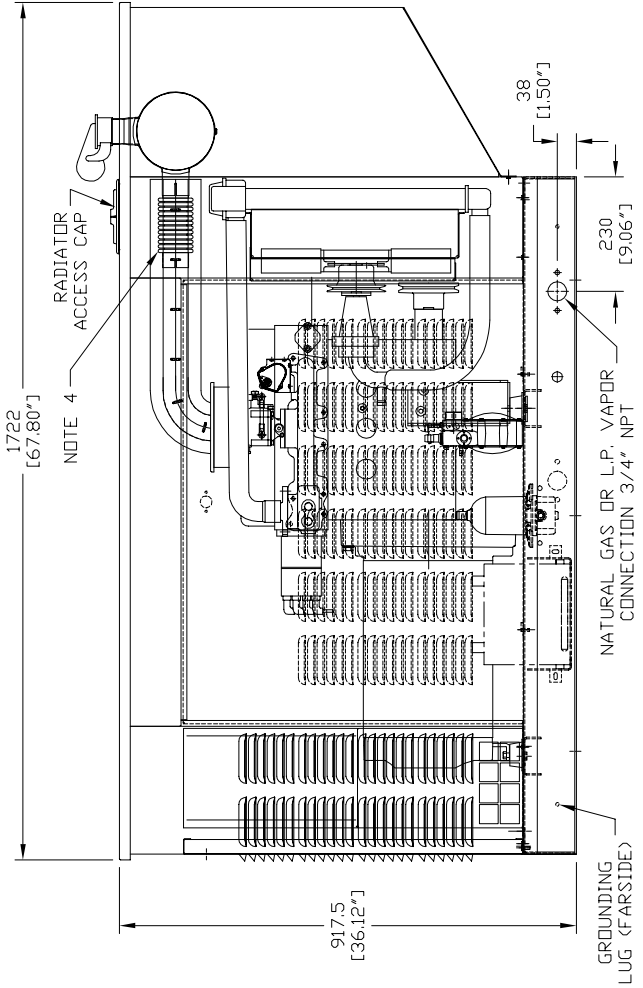

WEATHER PROOF & ACOUSTIC
COMPARTMENTS