

NOTES:

1. STANDARD BLOCK HEATER REQUIRES 120V AC CONNECTION
2. CONNECTION POINTS FOR AC LOAD LEADS AND ENGINE AUTOMATIC START/STOP CONTROL WIRES PROVIDED IN CONTROL PANEL.
3. 12 VOLT NEGATIVE GROUND SYSTEM
4. BATTERY TRAY INSIDE DIMENSIONS: 162" X 220" [6.38' X 8.66']
5. 2.0" I. D. FLEX EXHAUST, STANDARD WITH COMPARTMENT UNITS, OPTIONAL WITHOUT MAIN LINE CIRCUIT BREAKER.




WEIGHT DATA

UNIT: 390 kg [860 lbs]

UNITS: mm [INCHES]

ENGINE SERVICE CONNECTIONS

INLET LP VAPOR = 3/4" NPT COUPLING
INLET NATURAL GAS = 3/4" NPT COUPLING
OIL DRAIN = 1/4" NPT COUPLING
EXHAUST OUTLET - 2" OD MUFFLER OUTLET

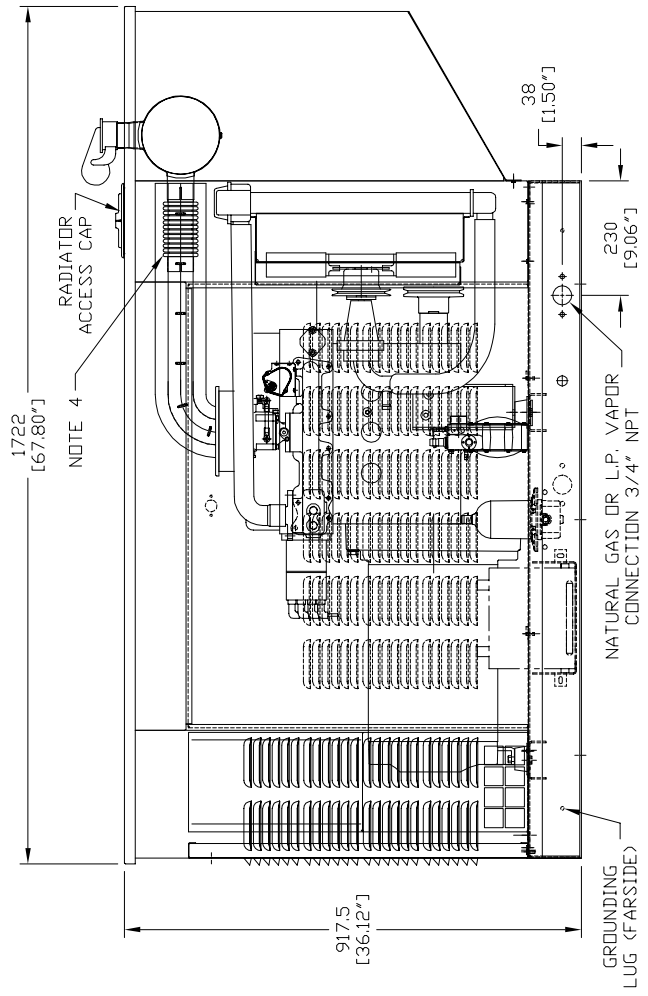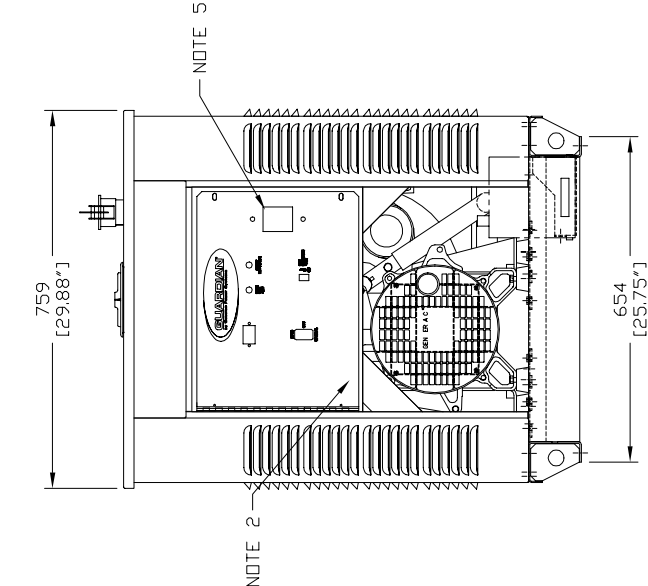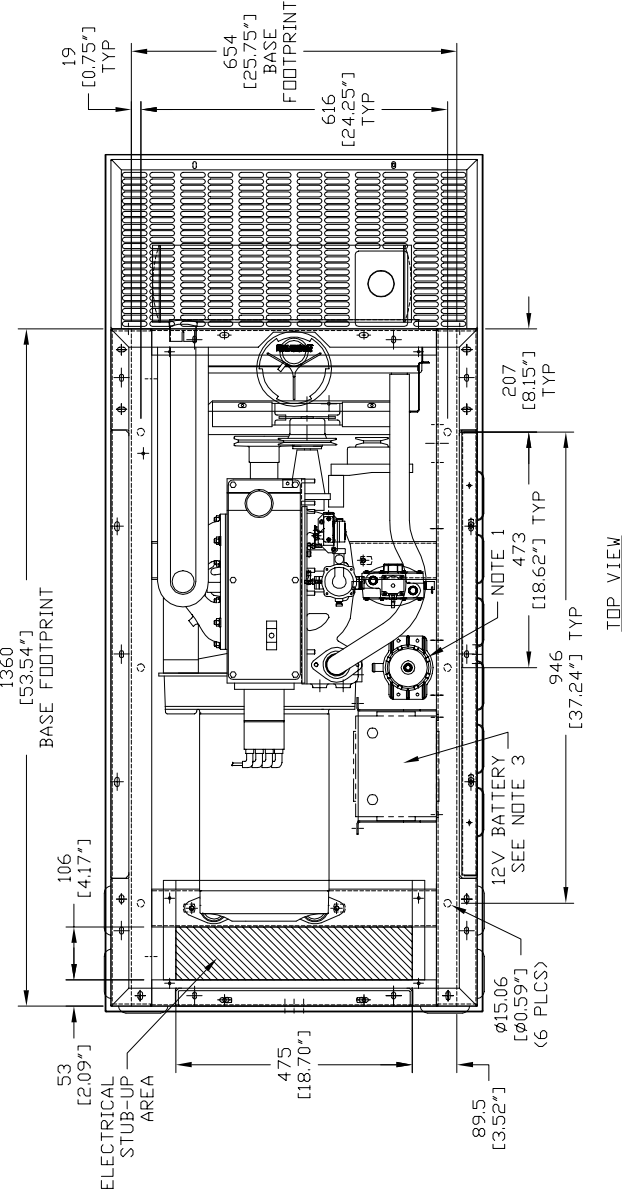

REAR VIEW
(SHOWN WITH DOOR REMOVED)

WEATHER PROOF & ACOUSTIC COMPARTMENTS