


| WEIGHT DATA                                                 |  |
|-------------------------------------------------------------|--|
| 1. 5L 20KW - 289KG [774.5lb]                                |  |
| 2. 5L 25KW - 389KG [1043lb]                                 |  |
| WOODEN SHIPPING SKIDS INCREASE<br>OVERALL WEIGHT - T. B. D. |  |

NOTES:



- 1) MINIMUM RECOMMENDED CONCRETE PAD SIZE: 1041 (41.0') WIDE X 2108 (83.0') LONG. REFERENCE INSTALLATION GUIDESUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES.
- 2) ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE AND LOCAL CODES FOR MINIMUM DISTANCES FROM OTHER STRUCTURES.
- 3) CIRCUIT BREAKER INFORMATION:  
SEE SPECIFICATION SHEET WITHIN OWNERS MANUAL
- 4) INSIDE STUB-UP AREA FOR AC LOAD LEAD CONDUIT CONNECTION, NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (.5 AMP MAX.) CONNECTION, AND ACCESS TO TRANSFER SWITCH CONTROL WIRES. REMOVE FRONT COVER FOR ACCESS.
- 4A) FIELD CUT HOLE IS ONLY REQUIRED FOR MOUNTING OF GENERATOR ON AN EXISTING PAD.
- 5) REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
- 6) REMOVE LIFT-OFF ENCLOSURE TO ACCESS EXHAUST MUFFLER.

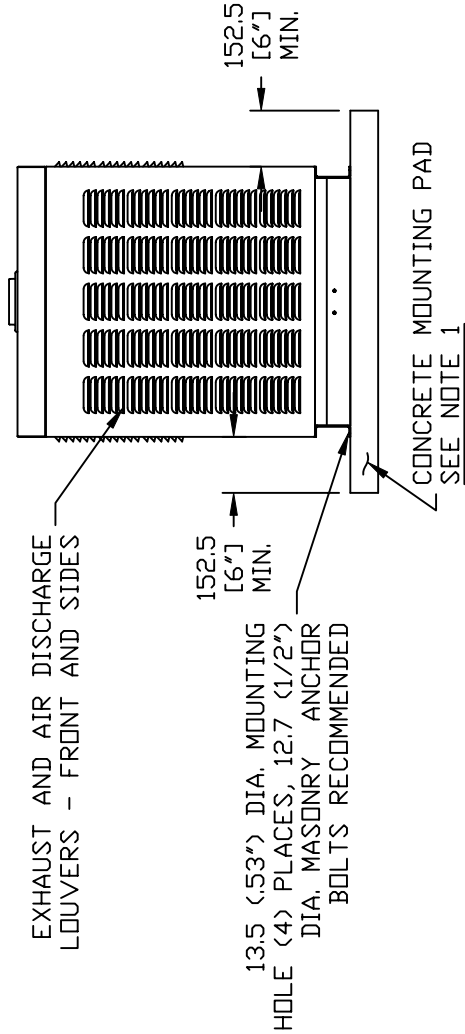

SERVICE ITEM ACCESSIBILITY CHART

| SERVICE ITEM        | 1. 5L 20KW      | 2. 5L 25KW      |
|---------------------|-----------------|-----------------|
| OIL FILL CAP        | EITHER DOOR     | EITHER DOOR     |
| OIL DIP STICK       | THRU LEFT DOOR  | THRU LEFT DOOR  |
| OIL FILTER          | THRU RIGHT DOOR | THRU LEFT DOOR  |
| OIL DRAIN HOSE      | THRU RIGHT DOOR | THRU RIGHT DOOR |
| RADIATOR DRAIN HOSE | THRU LEFT DOOR  | THRU LEFT DOOR  |
| AIR CLEANER ELEMENT | THRU RIGHT DOOR | THRU LEFT DOOR  |
| SPARK PLUGS         | THRU LEFT DOOR  | THRU LEFT DOOR  |
| MUFFLERS            | SEE NOTE 6      | SEE NOTE 6      |
| FAN BELT            | EITHER DOOR     | EITHER DOOR     |
| BATTERY             | THRU RIGHT DOOR | THRU LEFT DOOR  |

REFERENCE OWNERS MANUAL FOR PERIODIC  
REPLACEMENT PART LISTINGS

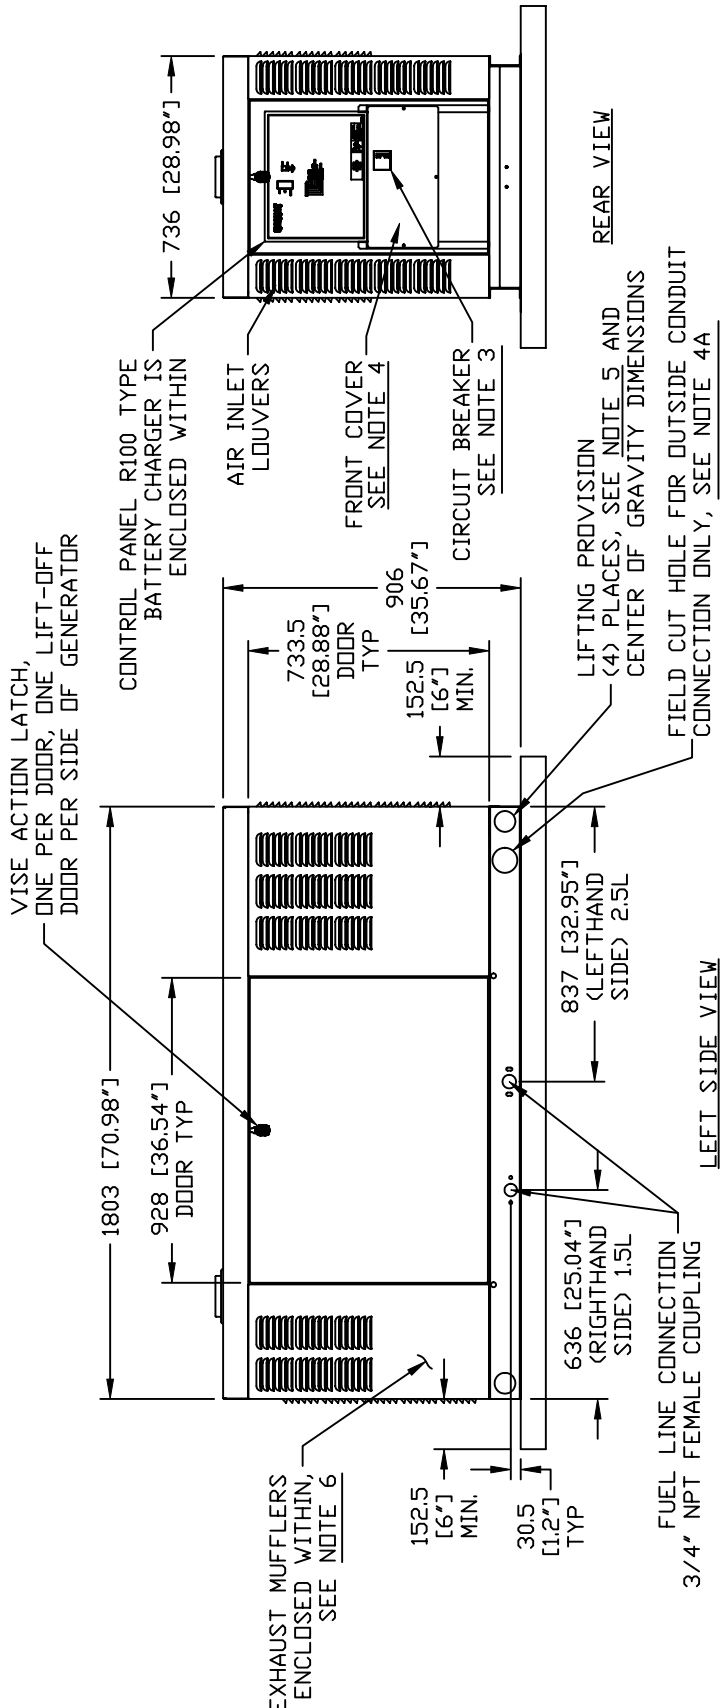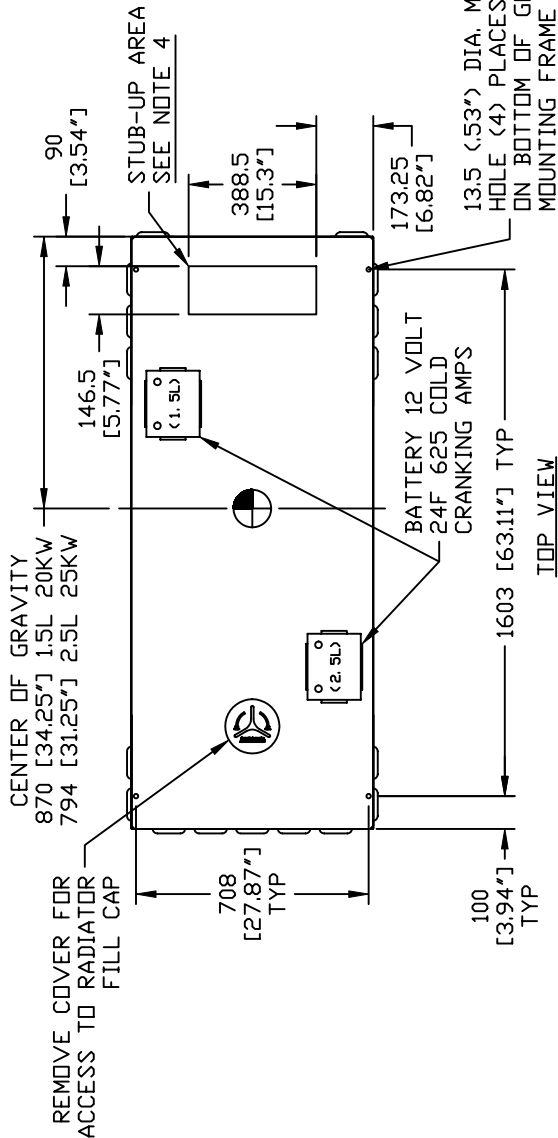

EXPLODED VIEW:  
INSTLN DRAWING 1.5L 20KW & 2.5L 25KW  
DRAWING #: 0F7555