
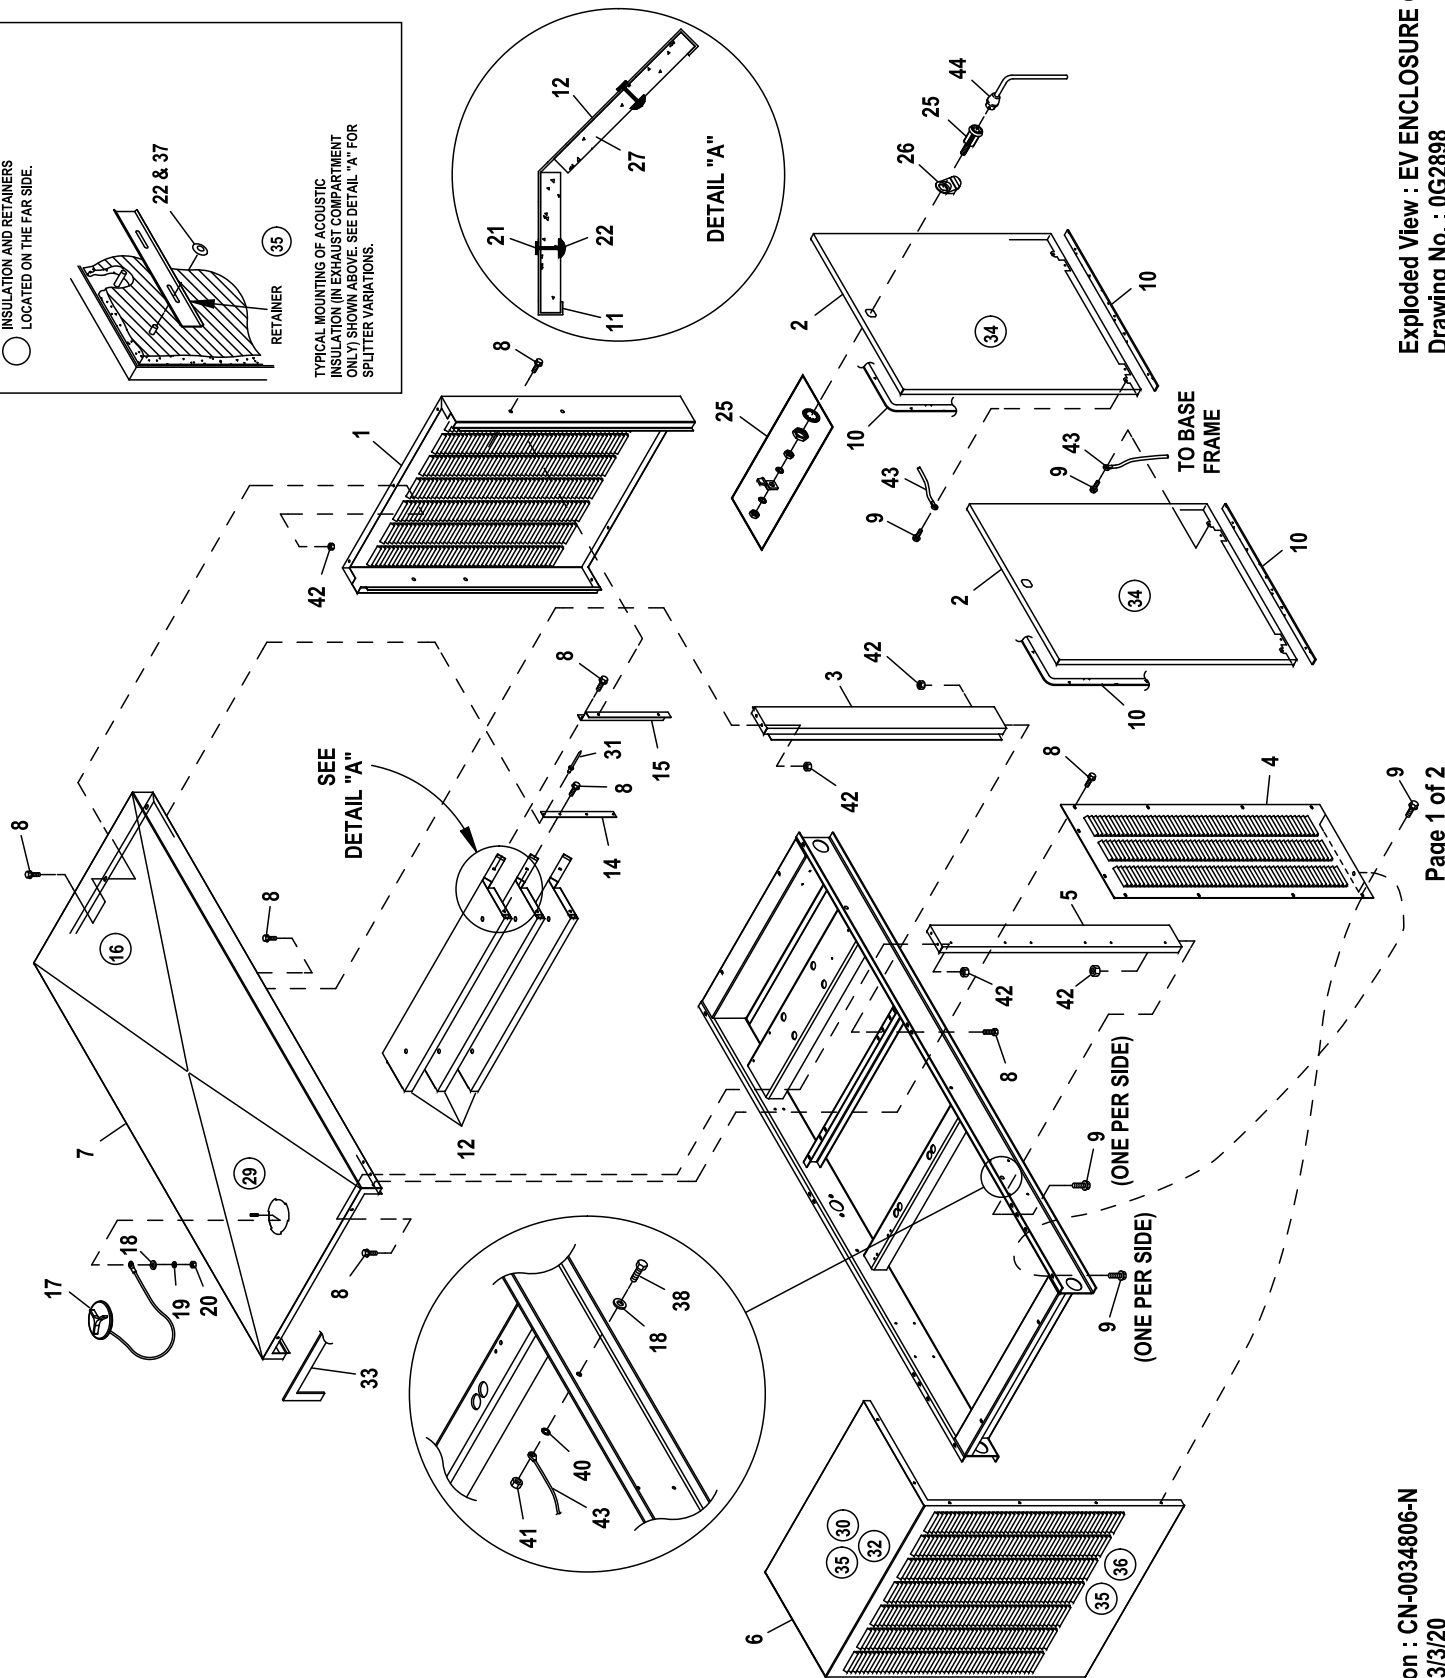


GROUP F

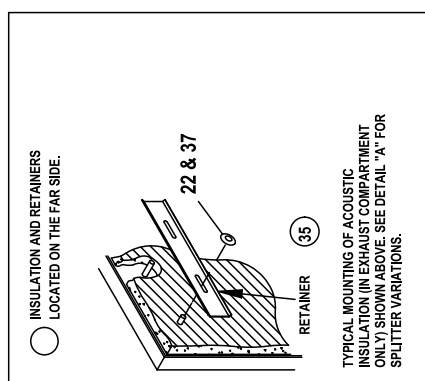

EXPLODED VIEW: EV ENCLOSURE C3

DRAWING #: 0G2898

GROUP F

ITEM	PART#	QTY.	DESCRIPTION
(2) 1	0F58660AL0R	1	REAR WRAP AL
(2) 2	0F5861AAL0R	4	DOOR AL
(2) 3	0F58650AL0R	2	CENTER SUPPORT AL
(3) 4	0F58640AL0R	2	DUCT, DISCHRG AL
(2) 5	0F58620AL0R	2	FRONT CRNR AL
(2) 6	0F58630AL0R	1	DUCT, CNTR DISCHRG AL
(2) 7	0F58600AL0R	1	ROOF, AL
(1) 8	0C2454	60	SCREW THF M6-1 X 16 N WA Z/JS
(1) 9	0E3257	16	SCREW TH-FRM M6 W/CAP SHKPRF W
10	0E5968	1	GASKET EXTRUDED TRIM (547" LG)
11	0J0336G	3	INSUL SPLITTER SMALL
12	0F2766	3	SPLITTER
14	0F3185	2	STRINGER SPLITTER C3
15	0F3416	2	SUPPORT SPLITTER C5 130KW
16	0J2624B	1	INSUL ROOF TOP REAR
17	0C2634A	1	ASSY ACCESS COVER
18	G022473	5	WASHER FLAT 1/4-M6 ZINC
19	G022097	1	WASHER LOCK M6-1/4
20	G022127	1	NUT HEX 1/4-20 STEEL
21	0F3072	16	INSULATION RETAINMENT HANGER
22	G078115	42	WASHER SELF LOCKING DOME #4-40
25	0F5048D	4	WISE-ACTION LATCH SLOTTED CIR
26	0F5049B	2	PULL TAB DOOR LOCK SS
27	0J0336B	3	INSULATION SPLITTER
29	0J2624D	1	INSULATION ROOF TOP
30	0F4073F	1	INSULATION DUCT TOP
31	G087233	2	RIVET POP .1875 X .450 SS
32	0G0257	1	REFLECTIVE HEAT SHIELD 2.4L
33	G066760	1	STRIP SEALANT 1/8 X 1 (44.5"LG)
34	0J2624C	4	INSULATION DOOR
35	0F3890B	3	RETAINER INSULATION (820)
36	0F4073B	1	INSULATION DUCT FRONT
37	078115A	10	WASHER SELF LOCKING DOME #8-32
38	G042568	4	SCREW HHC M6-1.0 X 20 G8.8
40	G022447	4	WASHER SHAKEPROOF INT 1/4
41	G049813	4	NUT HEX M6 X 1.0 G8 YEL CHR
(1) 42	G077992	29	NUT HEX LOCK M6-1.0 SS NY INS
43	0912970090	4	ASSY WIRE 14AWG GRN/YEL
44	0F8869D	1	KEY WISE-ACTION LATCH SLOT CIR

(1) ENCLOSURE NOTE: ALL PANELS THAT FASTEN TO THE BASEFRAME MUST BE SECURED USING I/N 8 & 9 (THREAD FORMING FASTENERS) AND I/N 42 (LOCK NUT). LOCK NUT IS TO BE INSTALLED AFTER THREAD FORMING FASTENER HAS PENETRATED THROUGH EXTRUSIONS IN ENCLOSURE PANELS. ALL PANEL TO PANEL CONNECTIONS TO INCLUDE AT LEAST ONE CONNECTION POINT USING I/N 9 (THREAD FORMING FASTENER).

(2) SHEET METAL PARTS LISTED IN THE BOM TABLE ARE REPRESENTING GENERIC PARTS (NO COLOR)

- MANUFACTURING: FOR CORRECT MATERIAL AND COLOR REFER TO AS400 BOM.
- CUSTOMER: WHEN ORDERING REPLACEMENT PARTS ENTER BASE NUMBER (FIRST 6 DIGITS ONLY) IN THE SYSTEM FOR CORRECT MATERIAL AND COLOR (FOR REFERENCE SEE GUIDELINE 0H7169).