
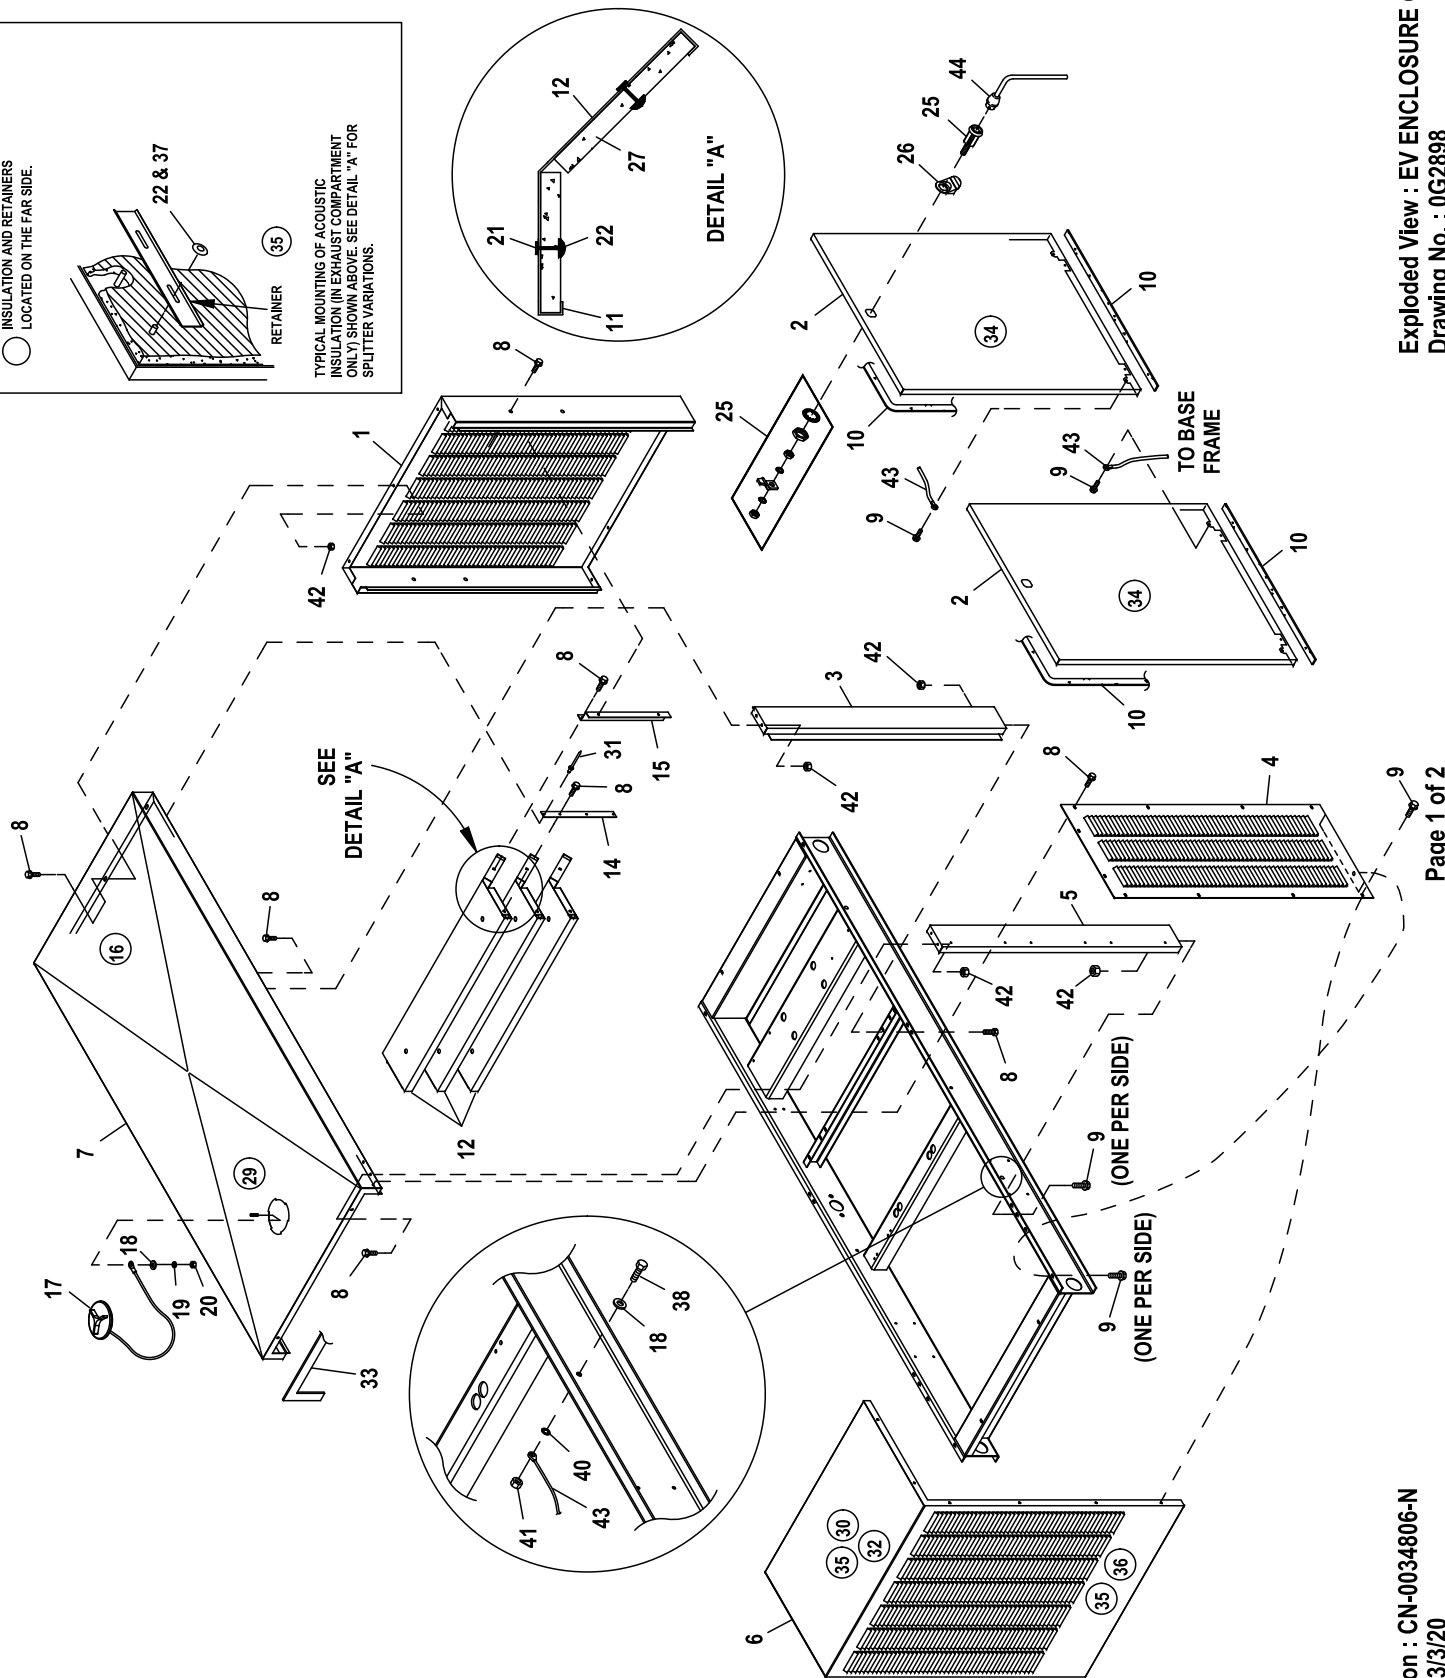


GROUP F

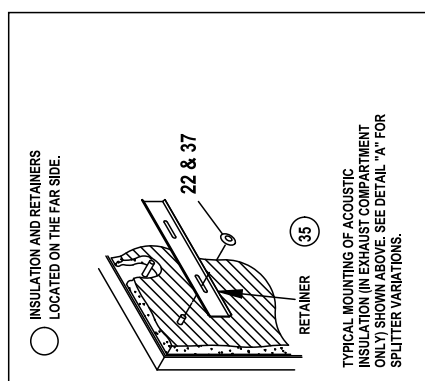

EXPLODED VIEW: EV ENCLOSURE C3

DRAWING #: 0G2898

GROUP F

ITEM	PART#	QTY.	DESCRIPTION
(2) 1	0F58660AL0R	1	REAR WRAP AL
(2) 2	0F5861AAL0R	4	DOOR AL
(2) 3	0F58650AL0R	2	CENTER SUPPORT AL
(3) 4	0F58640AL0R	2	DUCT, DISCHRG AL
(2) 5	0F58620AL0R	2	FRONT CRNR AL
(2) 6	0F58630AL0R	1	DUCT, CNTR DISCHRG AL
(2) 7	0F58600AL0R	1	ROOF, AL
(1) 8	0C2454	60	SCREW THF M6-1 X 16 N WA Z/JS
(1) 9	0E3257	16	SCREW TH-FRM M6 W/CAP SHKPRF W
10	0E5968	1	GASKET EXTRUDED TRIM (547" LG)
11	0J0336G	3	INSUL SPLITTER SMALL
12	0F2766	3	SPLITTER
14	0F3185	2	STRINGER SPLITTER C3
15	0F3416	2	SUPPORT SPLITTER C5 130KW
16	0J2624B	1	INSUL ROOF TOP REAR
17	0C2634A	1	ASSY ACCESS COVER
18	G022473	5	WASHER FLAT 1/4-M6 ZINC
19	G022097	1	WASHER LOCK M6-1/4
20	G022127	1	NUT HEX 1/4-20 STEEL
21	0F3072	16	INSULATION RETAINMENT HANGER
22	G078115	42	WASHER SELF LOCKING DOME #4-40
25	0F5048D	4	WISE-ACTION LATCH SLOTTED CIR
26	0F5049B	2	PULL TAB DOOR LOCK SS
27	0J0336B	3	INSULATION SPLITTER
29	0J2624D	1	INSULATION ROOF TOP
30	0F4073F	1	INSULATION DUCT TOP
31	G087233	2	RIVET POP .1875 X .450 SS
32	0G0257	1	REFLECTIVE HEAT SHIELD 2.4L
33	G066760	1	STRIP SEALANT 1/8 X 1 (44.5"LG)
34	0J2624C	4	INSULATION DOOR
35	0F3890B	3	RETAINER INSULATION (820)
36	0F4073B	1	INSULATION DUCT FRONT
37	078115A	10	WASHER SELF LOCKING DOME #8-32
38	G042568	4	SCREW HHC M6-1.0 X 20 G8.8
40	G022447	4	WASHER SHAKEPROOF INT 1/4
41	G049813	4	NUT HEX M6 X 1.0 G8 YEL CHR
(1) 42	G077992	29	NUT HEX LOCK M6-1.0 SS NY INS
43	0912970090	4	ASSY WIRE 14AWG GRN/YEL
44	0F8869D	1	KEY WISE-ACTION LATCH SLOT CIR

(1) ENCLOSURE NOTE: ALL PANELS THAT FASTEN TO THE BASEFRAME MUST BE SECURED USING I/N 8 & 9 (*THREAD FORMING FASTENERS*) AND I/N 42 (*LOCK NUT*). LOCK NUT IS TO BE INSTALLED AFTER THREAD FORMING FASTENER HAS PENETRATED THROUGH EXTRUSIONS IN ENCLOSURE PANELS. ALL PANEL TO PANEL CONNECTIONS TO INCLUDE AT LEAST ONE CONNECTION POINT USING I/N 9 (*THREAD FORMING FASTENER*).

(2) SHEET METAL PARTS LISTED IN THE BOM TABLE ARE REPRESENTING GENERIC PARTS (NO COLOR)

- MANUFACTURING: FOR CORRECT MATERIAL AND COLOR REFER TO AS400 BOM.
- CUSTOMER: WHEN ORDERING REPLACEMENT PARTS ENTER BASE NUMBER (FIRST 6 DIGITS ONLY) IN THE SYSTEM FOR CORRECT MATERIAL AND COLOR (FOR REFERENCE SEE GUIDELINE 0H7169).