


GROUP G


SERVICE ITEM	ACCESS			
	100KW 6.8L	130KW 6.8L	150KW 6.8L	150KW 6.8L
OIL FILL CAP	THRU RIGHT FRONT DOOR	THRU RIGHT FRONT DOOR	THRU RIGHT FRONT DOOR	THRU RIGHT FRONT DOOR
OIL DIP STICK	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR
OIL FILTER	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR
OIL DRAIN HOSE	THRU RIGHT FRONT DOOR	THRU RIGHT FRONT DOOR	THRU RIGHT FRONT DOOR	THRU RIGHT FRONT DOOR
RADIATOR DRAIN HOSE	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR	THRU LEFT FRONT DOOR
AIR CLEANER ELEMENT	EITHER FRONT DOORS	EITHER FRONT DOORS	EITHER FRONT DOORS	EITHER FRONT DOORS
SPARK PLUGS	BOTH FRONT DOORS	BOTH FRONT DOORS	BOTH FRONT DOORS	BOTH FRONT DOORS
MUFFLERS	SEE NOTE 6	SEE NOTE 6	SEE NOTE 6	SEE NOTE 6
FAN BELT	SEE NOTE 6	SEE NOTE 6	SEE NOTE 6	SEE NOTE 6
BATTERY	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR
AC OUTLET(S)	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR
GEARBOX FILL & DRAIN	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR	THRU RIGHT REAR DOOR

*NOTE: EXCLUDING 6.8L 150KW UNIT
REFERENCE OWNERS MANUAL FOR PERIODIC REPLACEMENT
PART LISTINGS

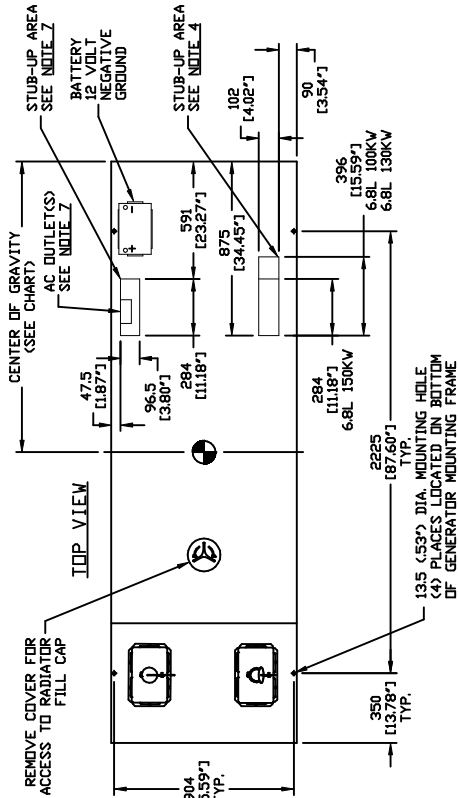



NOTES:

- 1) MINIMUM RECOMMENDED CONCRETE PAD SIZE 1545 (60.8') WIDE X 3535 (139.2') LONG.
- 2) GENERATOR MUST BE LOCATED A MINIMUM DISTANCE OF 5 FEET FROM A WALL OR FENCE. ALLOW A 5 FOOT MINIMUM PERIMETER OF OPEN SPACE AROUND THE ENTIRE GENERATOR.
- 3) CIRCUIT BREAKER INFORMATION:
SEE SPECIFICATION SHEET WITHIN OWNERS MANUAL.
- 4) INSIDE STUB-UP AREA FOR AC LOAD LEAD CONDUIT CONNECTION, NEUTRAL CONNECTION, AUXILIARY OUTPUT RELAYS, AND ACCESS TO TRANSFER SWITCH CONTROL WIRES.
REMOVE COVER FOR ACCESS.
- 4A) FIELD CUT HOLE IS ONLY REQUIRED FOR MOUNTING OF GENERATOR ON AN EXISTING PAD.
- 5) REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
- 6) REMOVE EITHER LEFT OR RIGHT HAND SIDE PANEL TO ACCESS EXHAUST MUFFLERS AND FAN BELT.
- 7) INSIDE ACCESS TO 120VAC 20A GFCI OUTLET PRE-WIRED TO SUPPLY POWER TO BATTERY CHARGER.
6.8L ONLY: USE 20A GFCI OUTLET FOR ENGINE BLOCK HEATER.

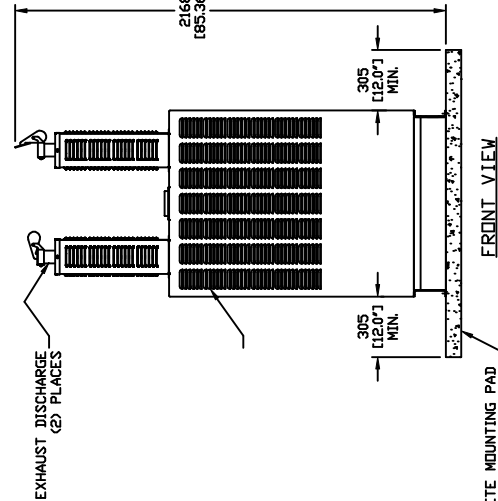

WEIGHT DATA	
6.8L 100KW - 1227KG (2705 LB)	
6.8L 130KW - 1303KG (2873 LB)	
6.8L 150KW - 1209KG (2666 LB)	
WOODEN SHIPPING SKIDS INCREASE	
OVERALL WEIGHT 79KG (175 LB)	

CENTER OF GRAVITY	
1275 (50.2') - 100KW 6.8L	
1230 (48.4') - 130KW 6.8L	
1315 (51.8') - 150KW 6.8L	

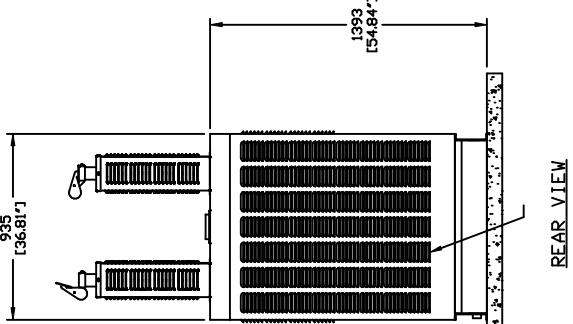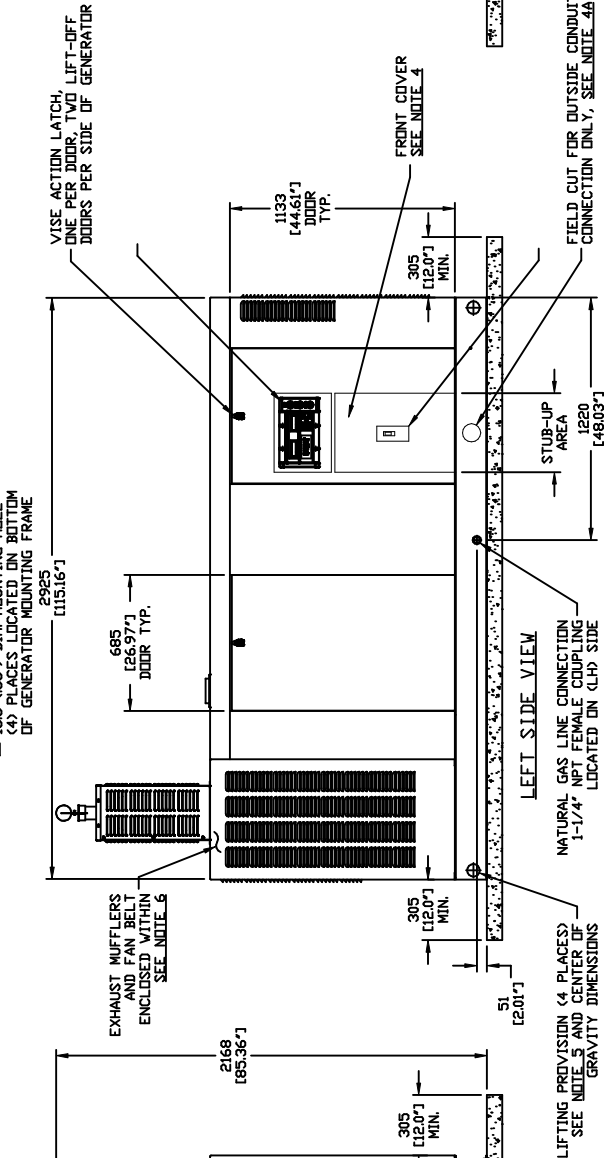

EXPLODED VIEW:
6.8L (100, 130 & 150) - G3
DRAWING #: 0H3005

THIS PAGE IS LEFT INTENTIONALLY BLANK