



8

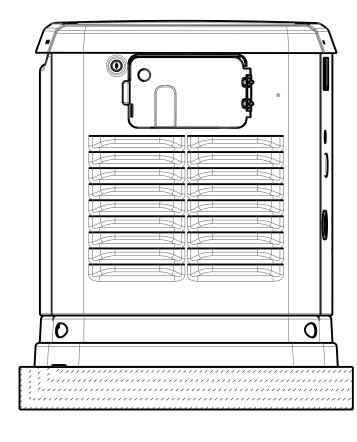

RIGHT SIDE VIEW


4


3

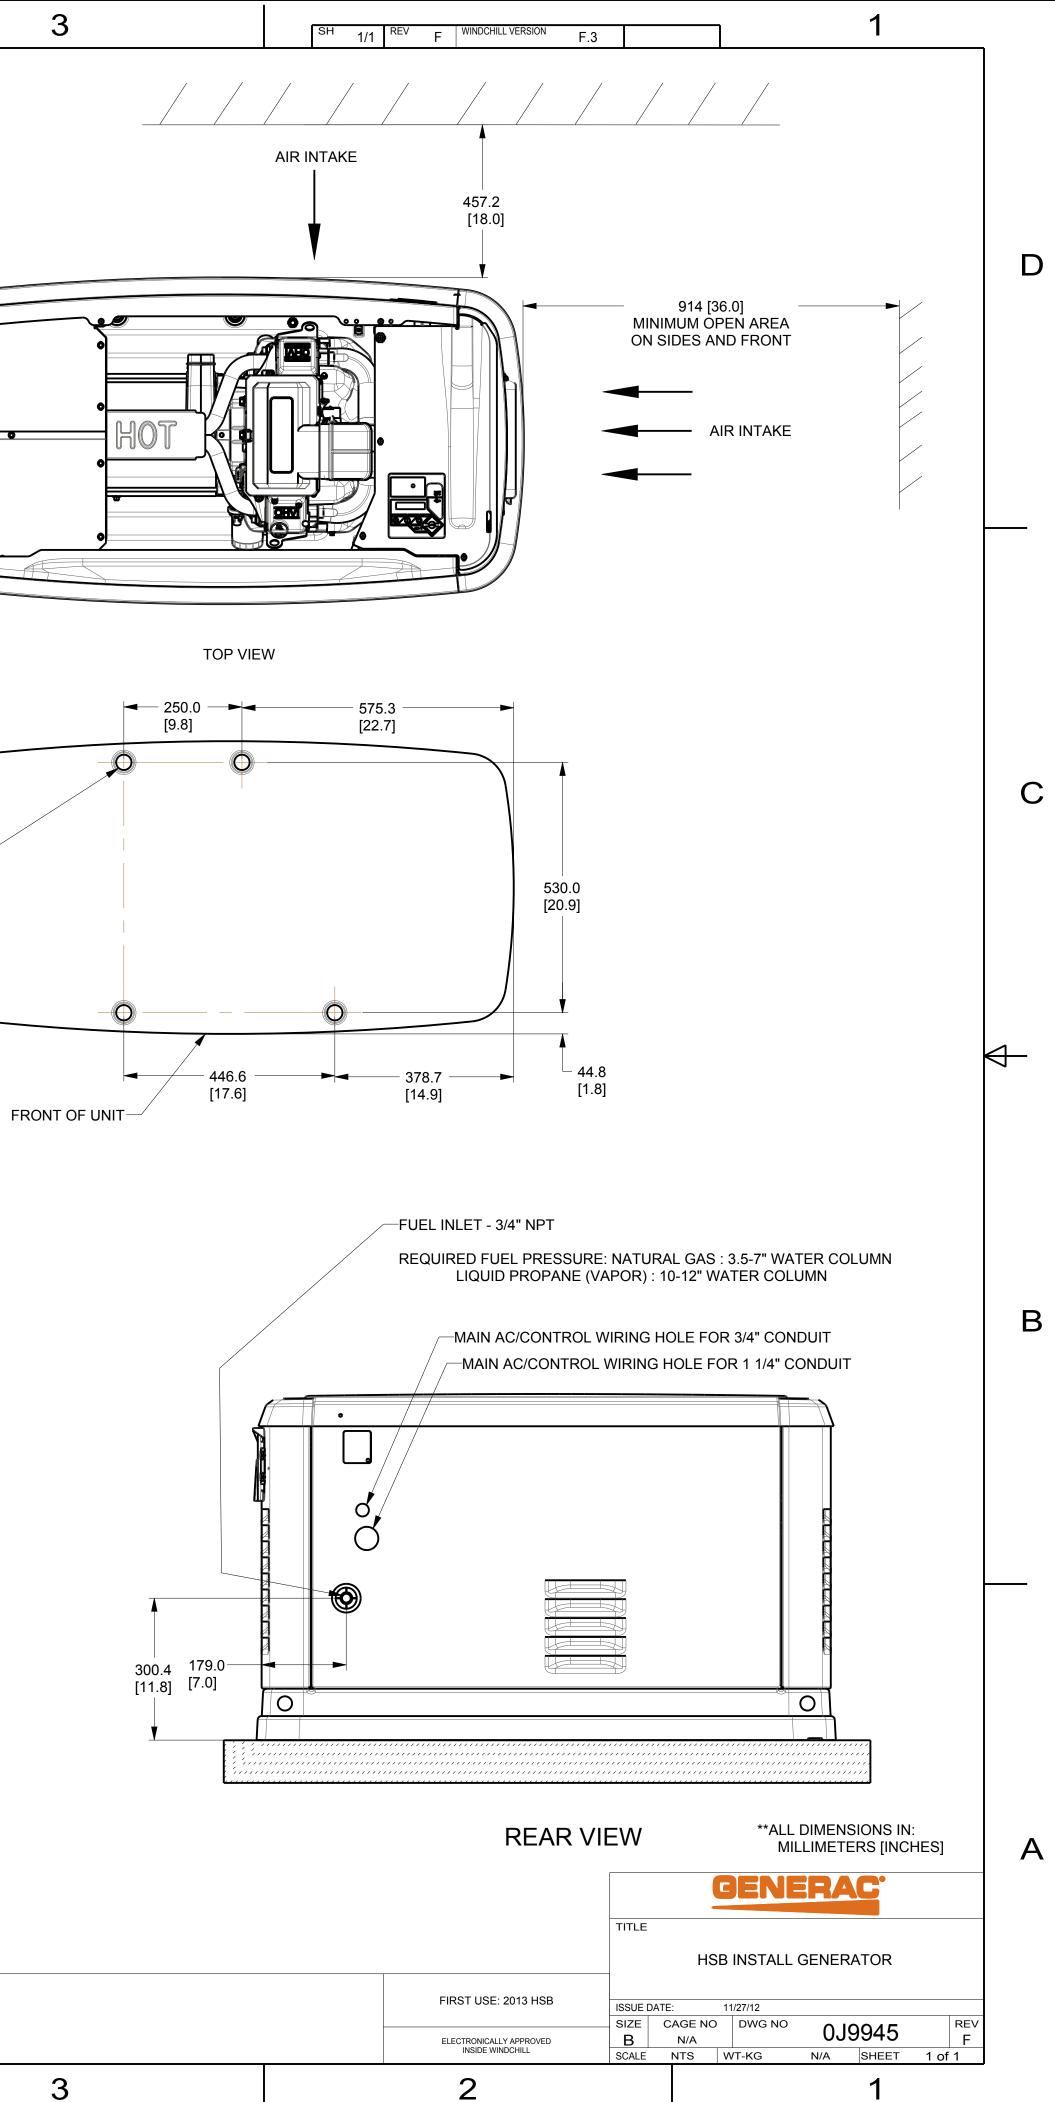



HOLE LOCATIONS FOR OPTIONAL MOUNTING TO A CONCRETE PAD 16.0 [5/8] DIA. CLEARANCE HOLE (4) PLACES, 3/8 DIA. MASONRY ANCHOR BOLTS RECOMMENDED

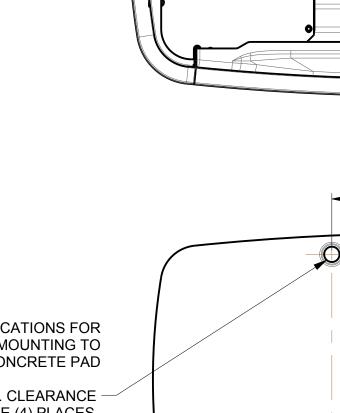

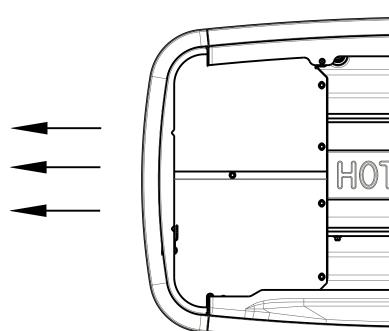

3

AIR OUTLET