


GROUP F

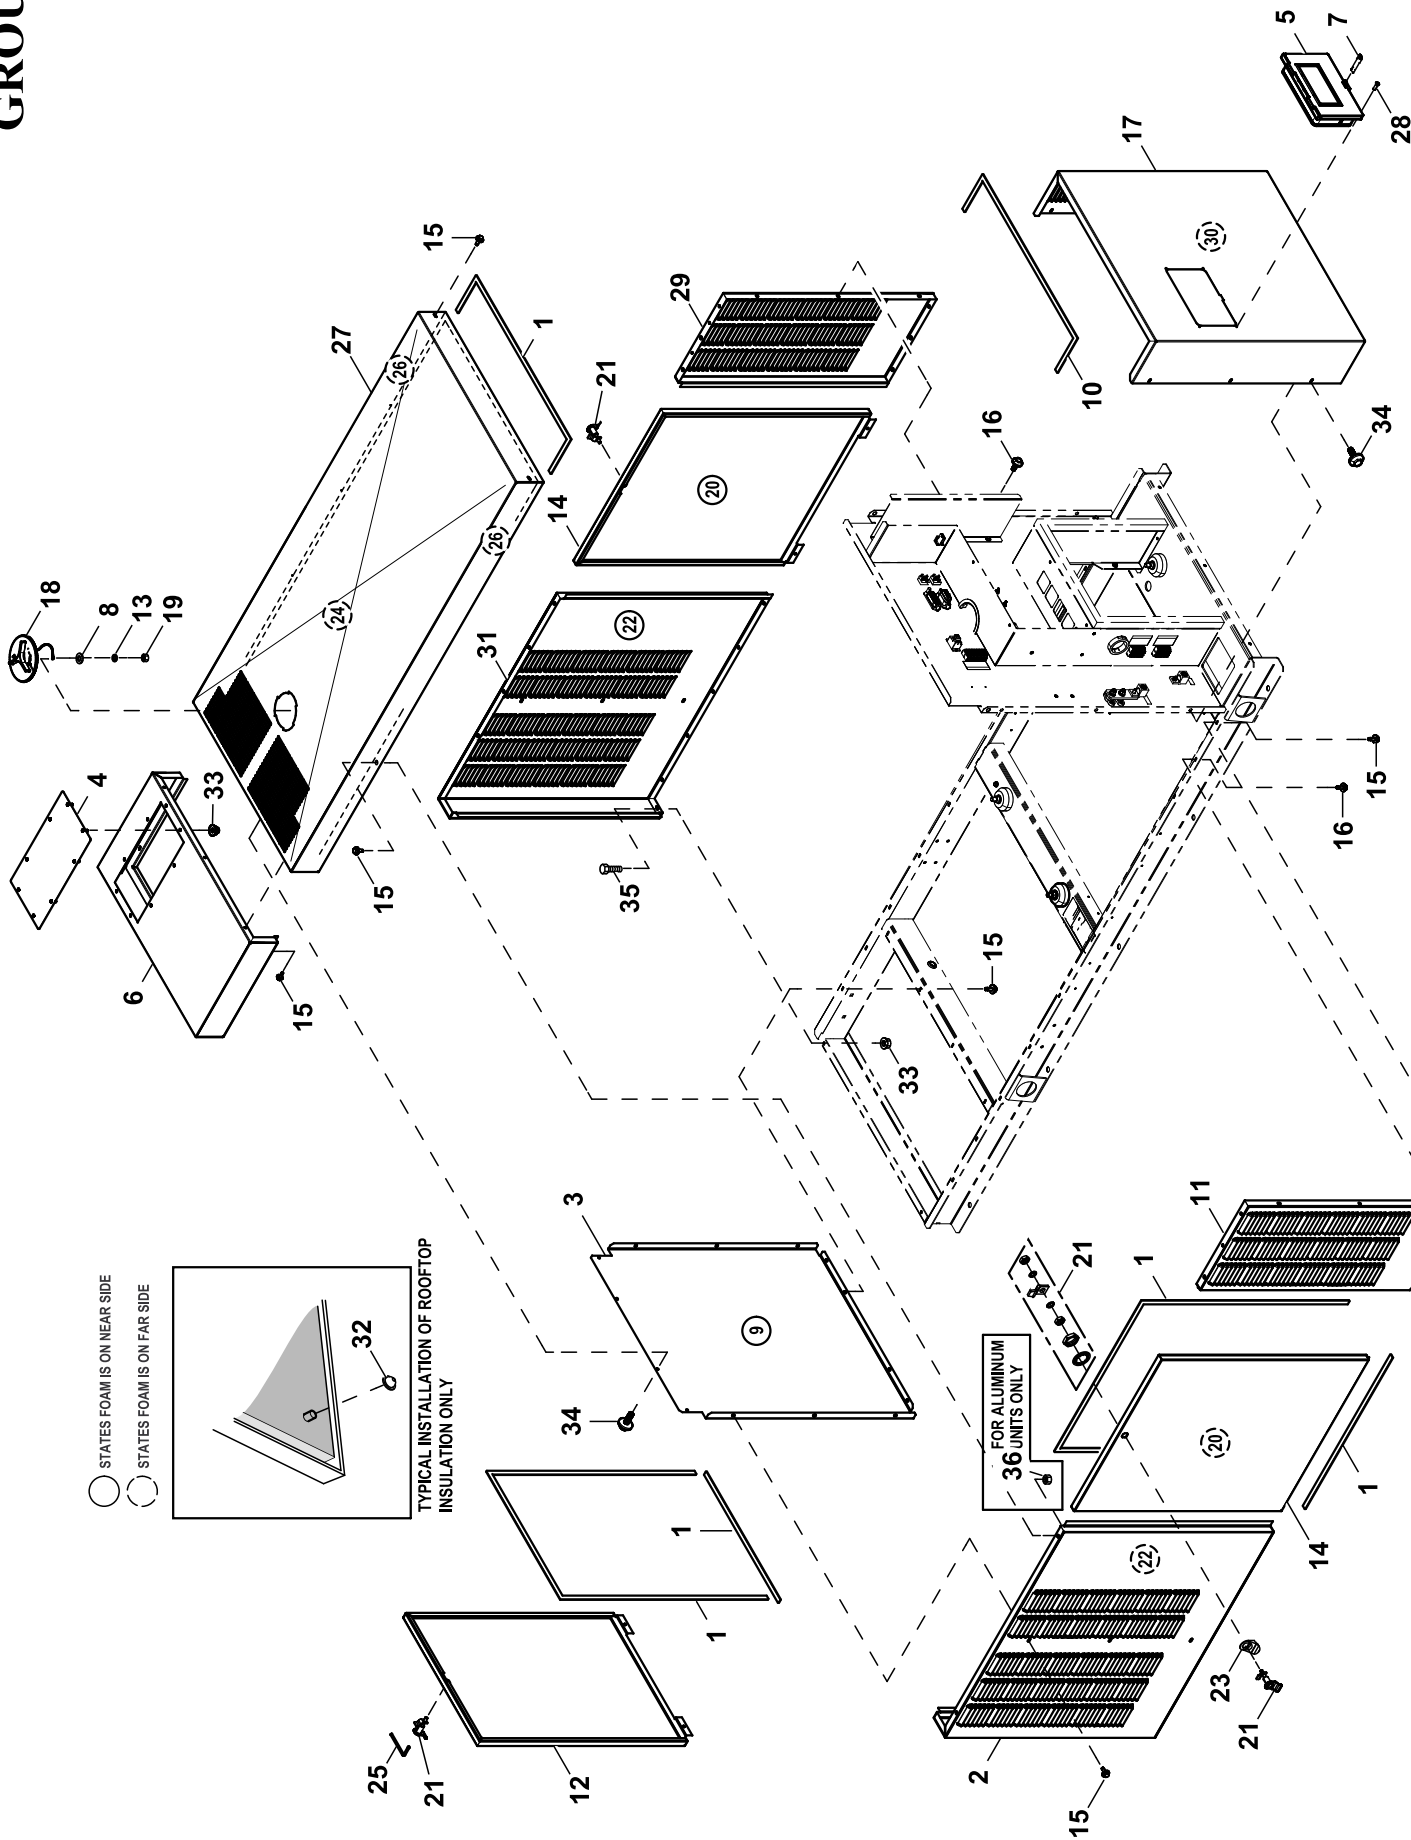

EXPLODED VIEW: EV ENCLOSURE C2**DRAWING #:0K3596****GROUP F**

ITEM	PART#	QTY.	DESCRIPTION
1	0E5968	1	GASKET, EXTRUDED TRIM (427.0"LG)
(1)2	0K36140ST0R	1	FRONT LEFT CORNER C2
3	0K3689	1	FRONT DIVIDER C2
(1)4	0K60780AL0R	1	EXTERNAL VENT COVER PLATE
5	0K3386	1	CUSTOMER ACCESS ASSEMBLY
(1)6	0K61180AL0R	1	VENTING ROOF C2 AL GREY
7	0K4322	1	EYE HASP CUST ACCESS BOX
8	022473	1	WASHER FLAT 1/4-M6 ZINC
9	0K2679	1	INSUL DUCT C2 D3.4L
10	066760	1	STRIP SEALANT 1/8 X 1
(1)11	0K37850ST0R	1	REAR LEFT C2 CPL RAW
(1)12	0K35970ST0R	1	DOOR C2 STEEL RAW
13	022097	1	WASHER LOCK M6-1/4
(1)14	0K37880ST0R	2	DOOR C2 STEEL RAW
(2)15	0C2454	37	SCREW HWHTF M6-1 X 16 N WA Z/JS
(2)16	0E3257	18	SCREW HWHTF M6-1.0 X 16
(1)17	0K37870AL0R	1	PANEL CENTER REAR C2 CPL
18	0F4487A	1	ASSY ACCESS COVER NO-BRANDING
19	022127	1	NUT HEX 1/4-20 STEEL
20	0K2671	2	INSUL DOOR C2 D3.4L
21	0F5048D	3	WISE-ACTION LATCH, SLOTTED CIR
22	0K2671B	2	INSUL CORNER POST C2 D3.4L
23	0F5049B	3	PULL TAB DOOR LOCK ST
24	0K2671A	1	INSUL ROOF TOP C2 D3.4L
25	0F8869D	1	KEY WISE-ACTION LATCH SLOT CIR
26	0K2671E	2	INSUL ROOF SIDES C2 CPL
(1)27	0K36000AL0R	1	ROOF C2 AL
28	0J7751	4	SCREW PPHTF #10-16 X 1/2 B
(1)29	0K37830ST0R	1	REAR RIGHT C2 CPL ST RAW
30	0K2671C	1	INSUL FRONT C2 D3.4L
(1)31	0K35990ST0R	1	FRONT RIGHT CORNER C2
32	078115A	6	WASHER SELF LOCKING DOME #8-32
33	0D3700	10	NUT FLANGE M6-1.0 NYLOK
34	0K8641	9	SCREW HHFC M6-1.0 X 20 NYL WA
35	080318	2	SCREW HHFC M6-1.0 X 25 FTH G8
(3)36	077992	32	NUT HEX LOCK M6-1.0 SS NY INS

NOTES (UNLESS OTHERWISE SPECIFIED):

(1) SHEET METAL PARTS LISTED IN THE BOM TABLE ARE REPRESENTING GENERIC PARTS (NO COLOR)

- MANUFACTURING: FOR CORRECT MATERIAL AND COLOR REFER TO XA BOM.
- CUSTOMER: WHEN ORDERING REPLACEMENT PARTS ENTER BASE NUMBER (FIRST 6 DIGITS ONLY) IN THE SYSTEM FOR CORRECT MATERIAL AND COLOR (FOR REFERENCE SEE GUIDELINE 0H7169).

(2) ENCLOSURE NOTE: PANELS THAT FASTEN TO THE BASEFRAME MUST BE SECURED USING I/N 15 & 16 (THREAD FORMING FASTENERS). ALL PANEL TO PANEL CONNECTIONS TO INCLUDE AT LEAST ONE CONNECTION POINT USING I/N 16 (THREAD FORMING FASTENER).

(3) FOR ALUMINUM UNITS ONLY.