

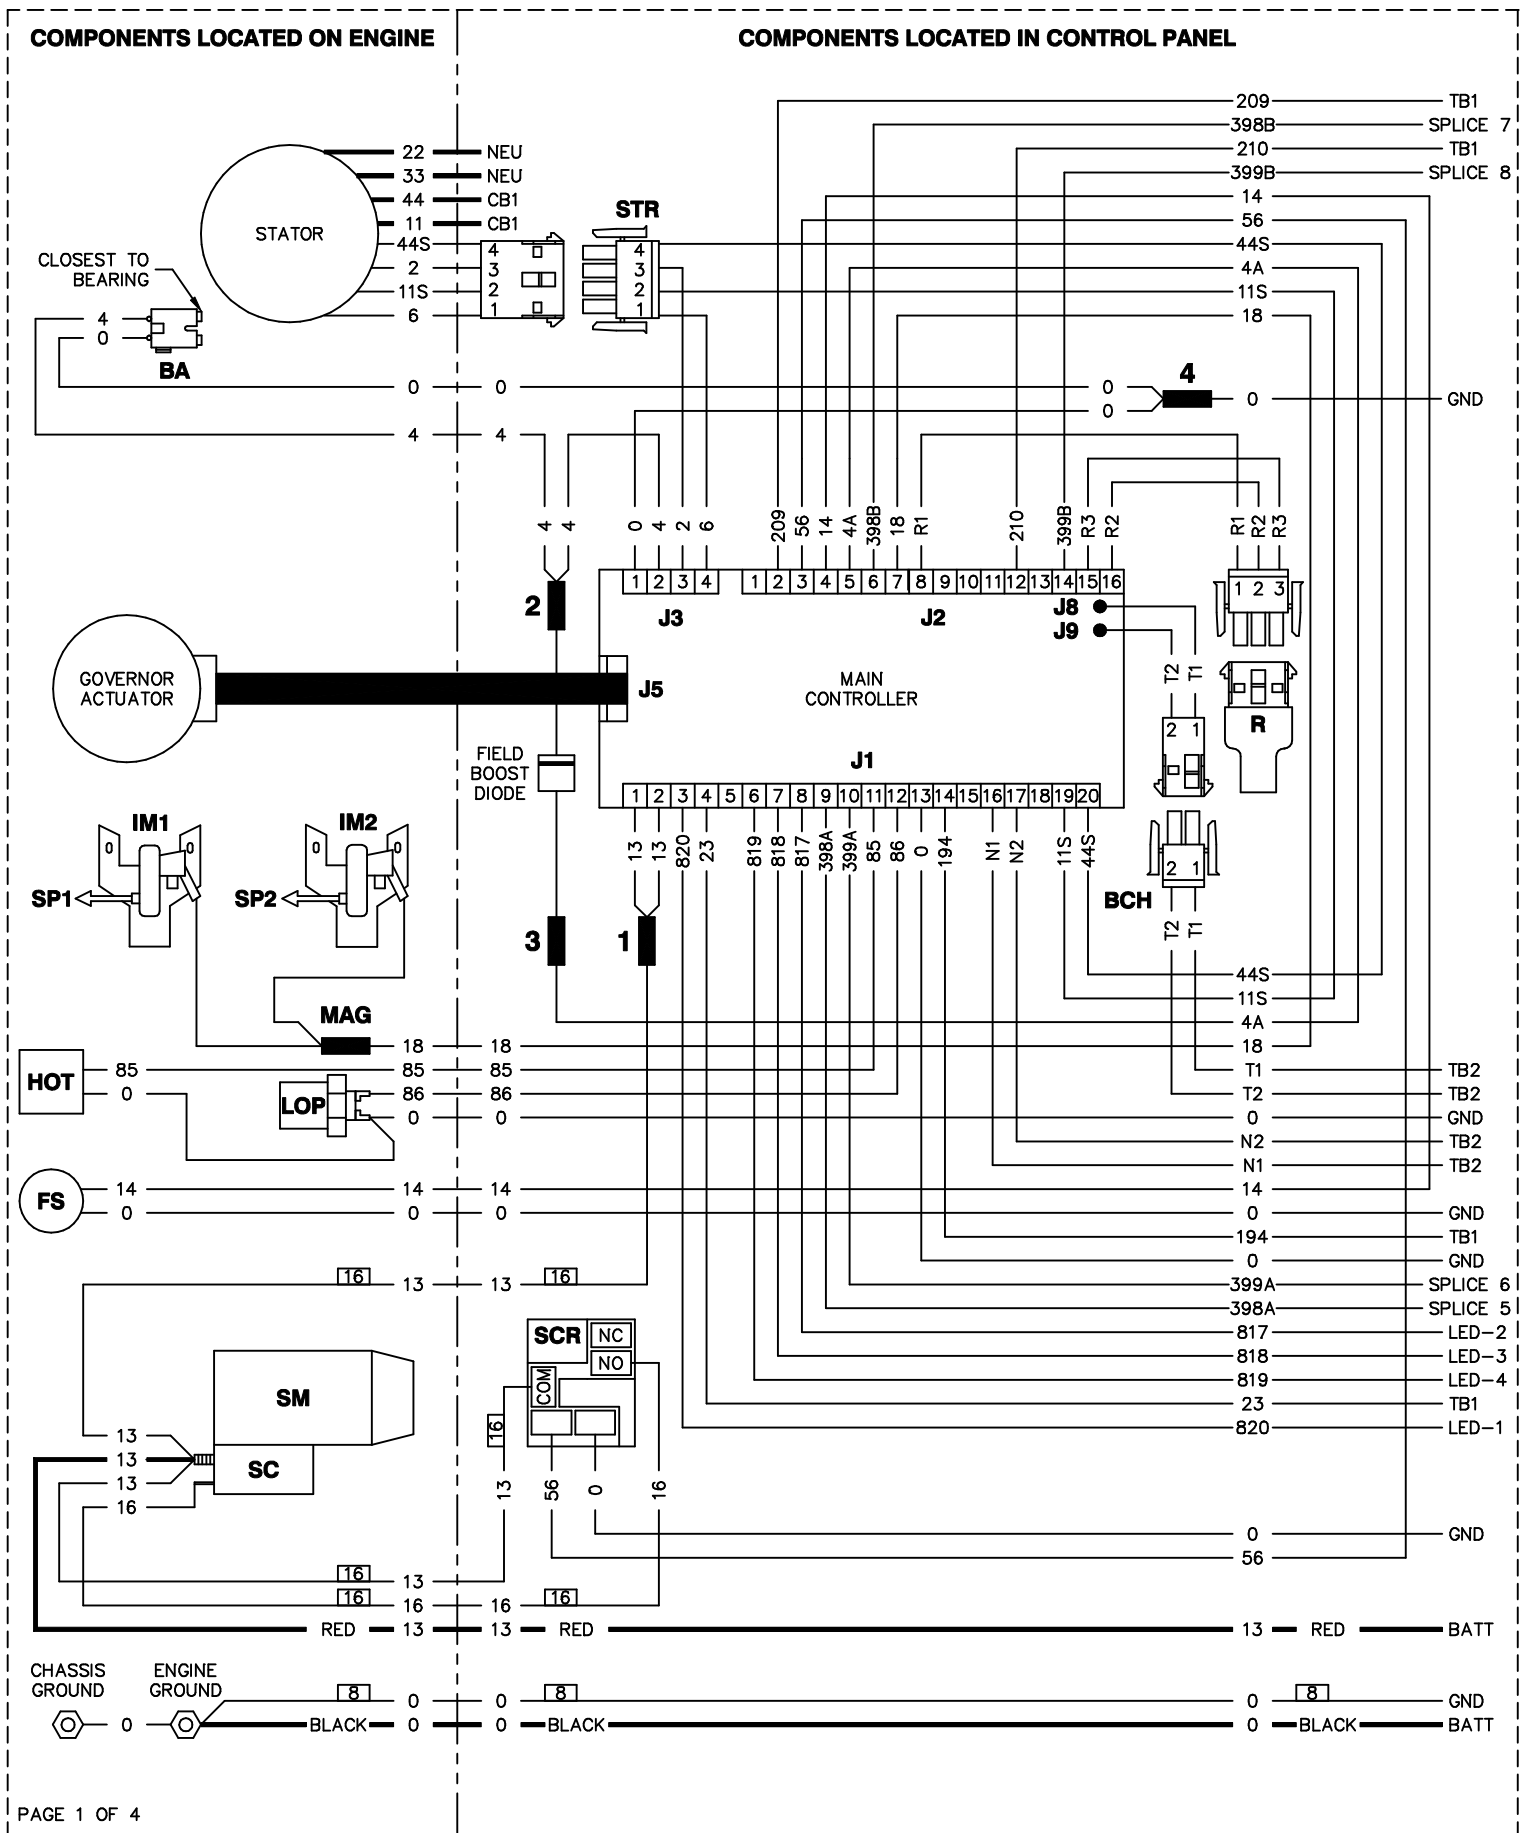



GROUP G

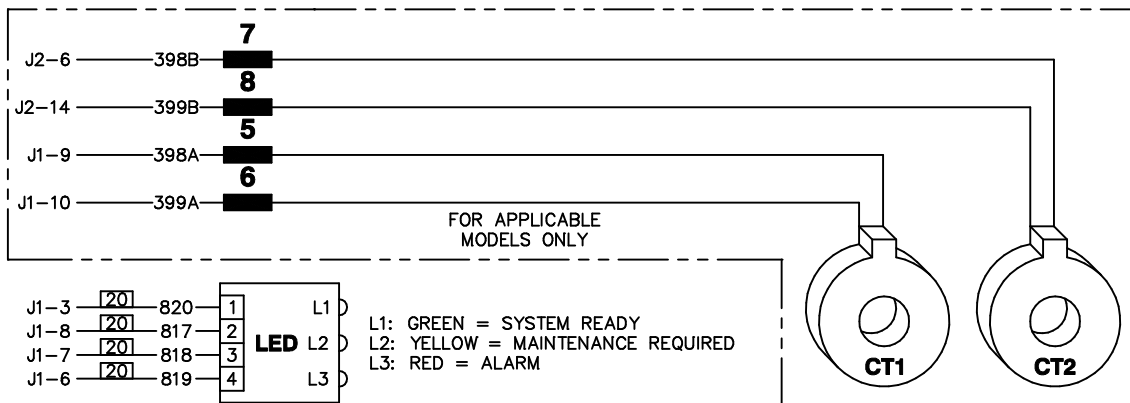

COMPONENTS LOCATED IN CUSTOMER CONNECTION AREA

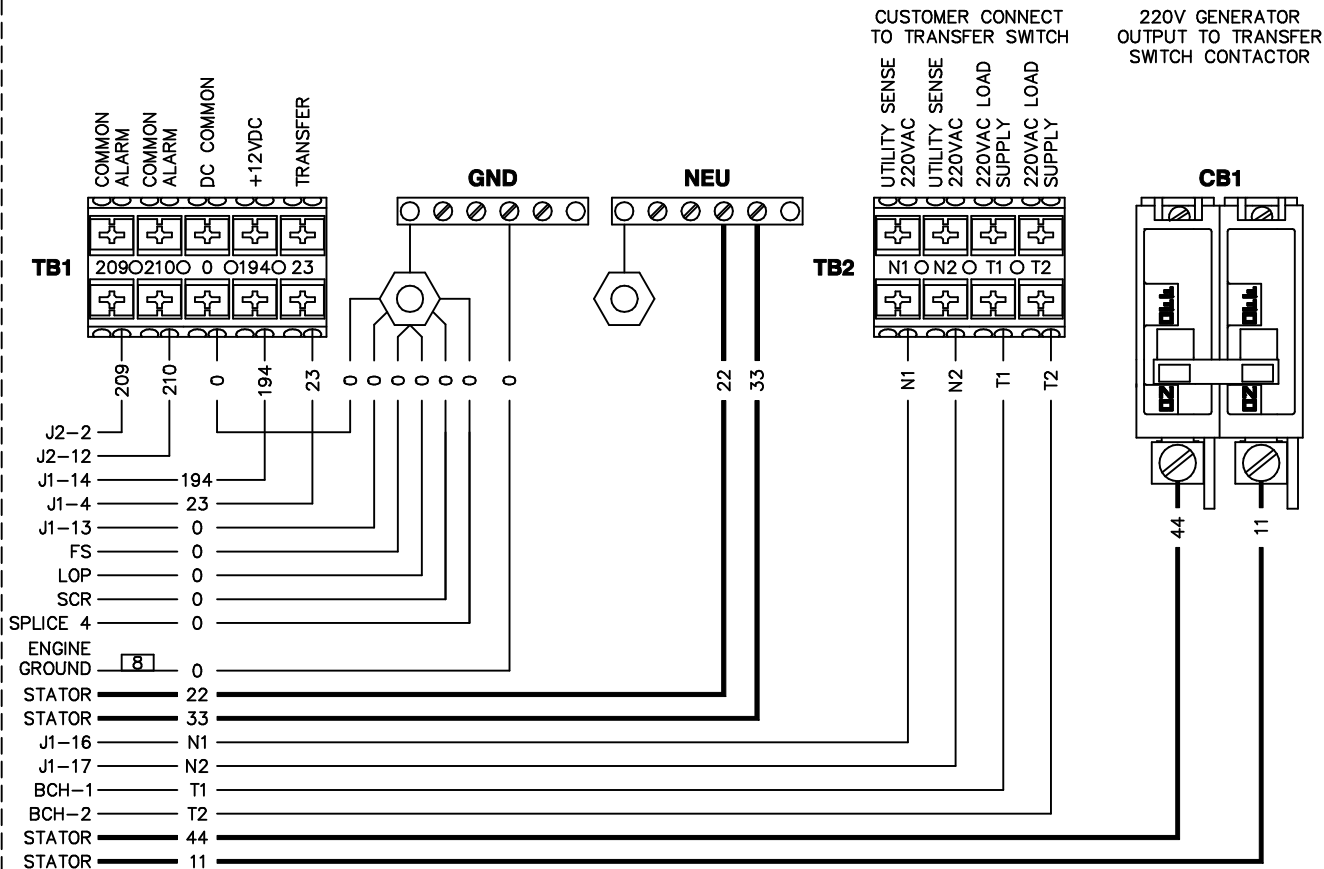

LEGEND


BA - BRUSH ASSEMBLY	SC - STARTER CONTACTOR
BCH - BATTERY CHARGER	SCR - STARTER CONTROL RELAY
CB1 - CIRCUIT BREAKER (MAIN OUTPUT)	SM - STARTER MOTOR
CT_ - CURRENT TRANSFORMER	SP_ - SPARK PLUG
FS - FUEL SOLENOID	STR - STATOR
GFCI - GROUND FAULT CIRCUIT INTERRUPT	TB_ - TERMINAL BLOCKS
GND - GROUND	
HOT - HIGH OIL TEMPERATURE SWITCH	
IM_ - IGNITION MODULE	
LED - LED BOARD	
LOP - LOW OIL PRESSURE SWITCH	
MAG - MAGNETO	
NEU - NEUTRAL	
R - RESISTOR	

NOTE: ALL WIRES 18 AWG 300V UL LISTED UNLESS SHOWN OTHERWISE.


AWG SIZE

SPLICE NUMBER

WIRE SPLICE



GROUP G

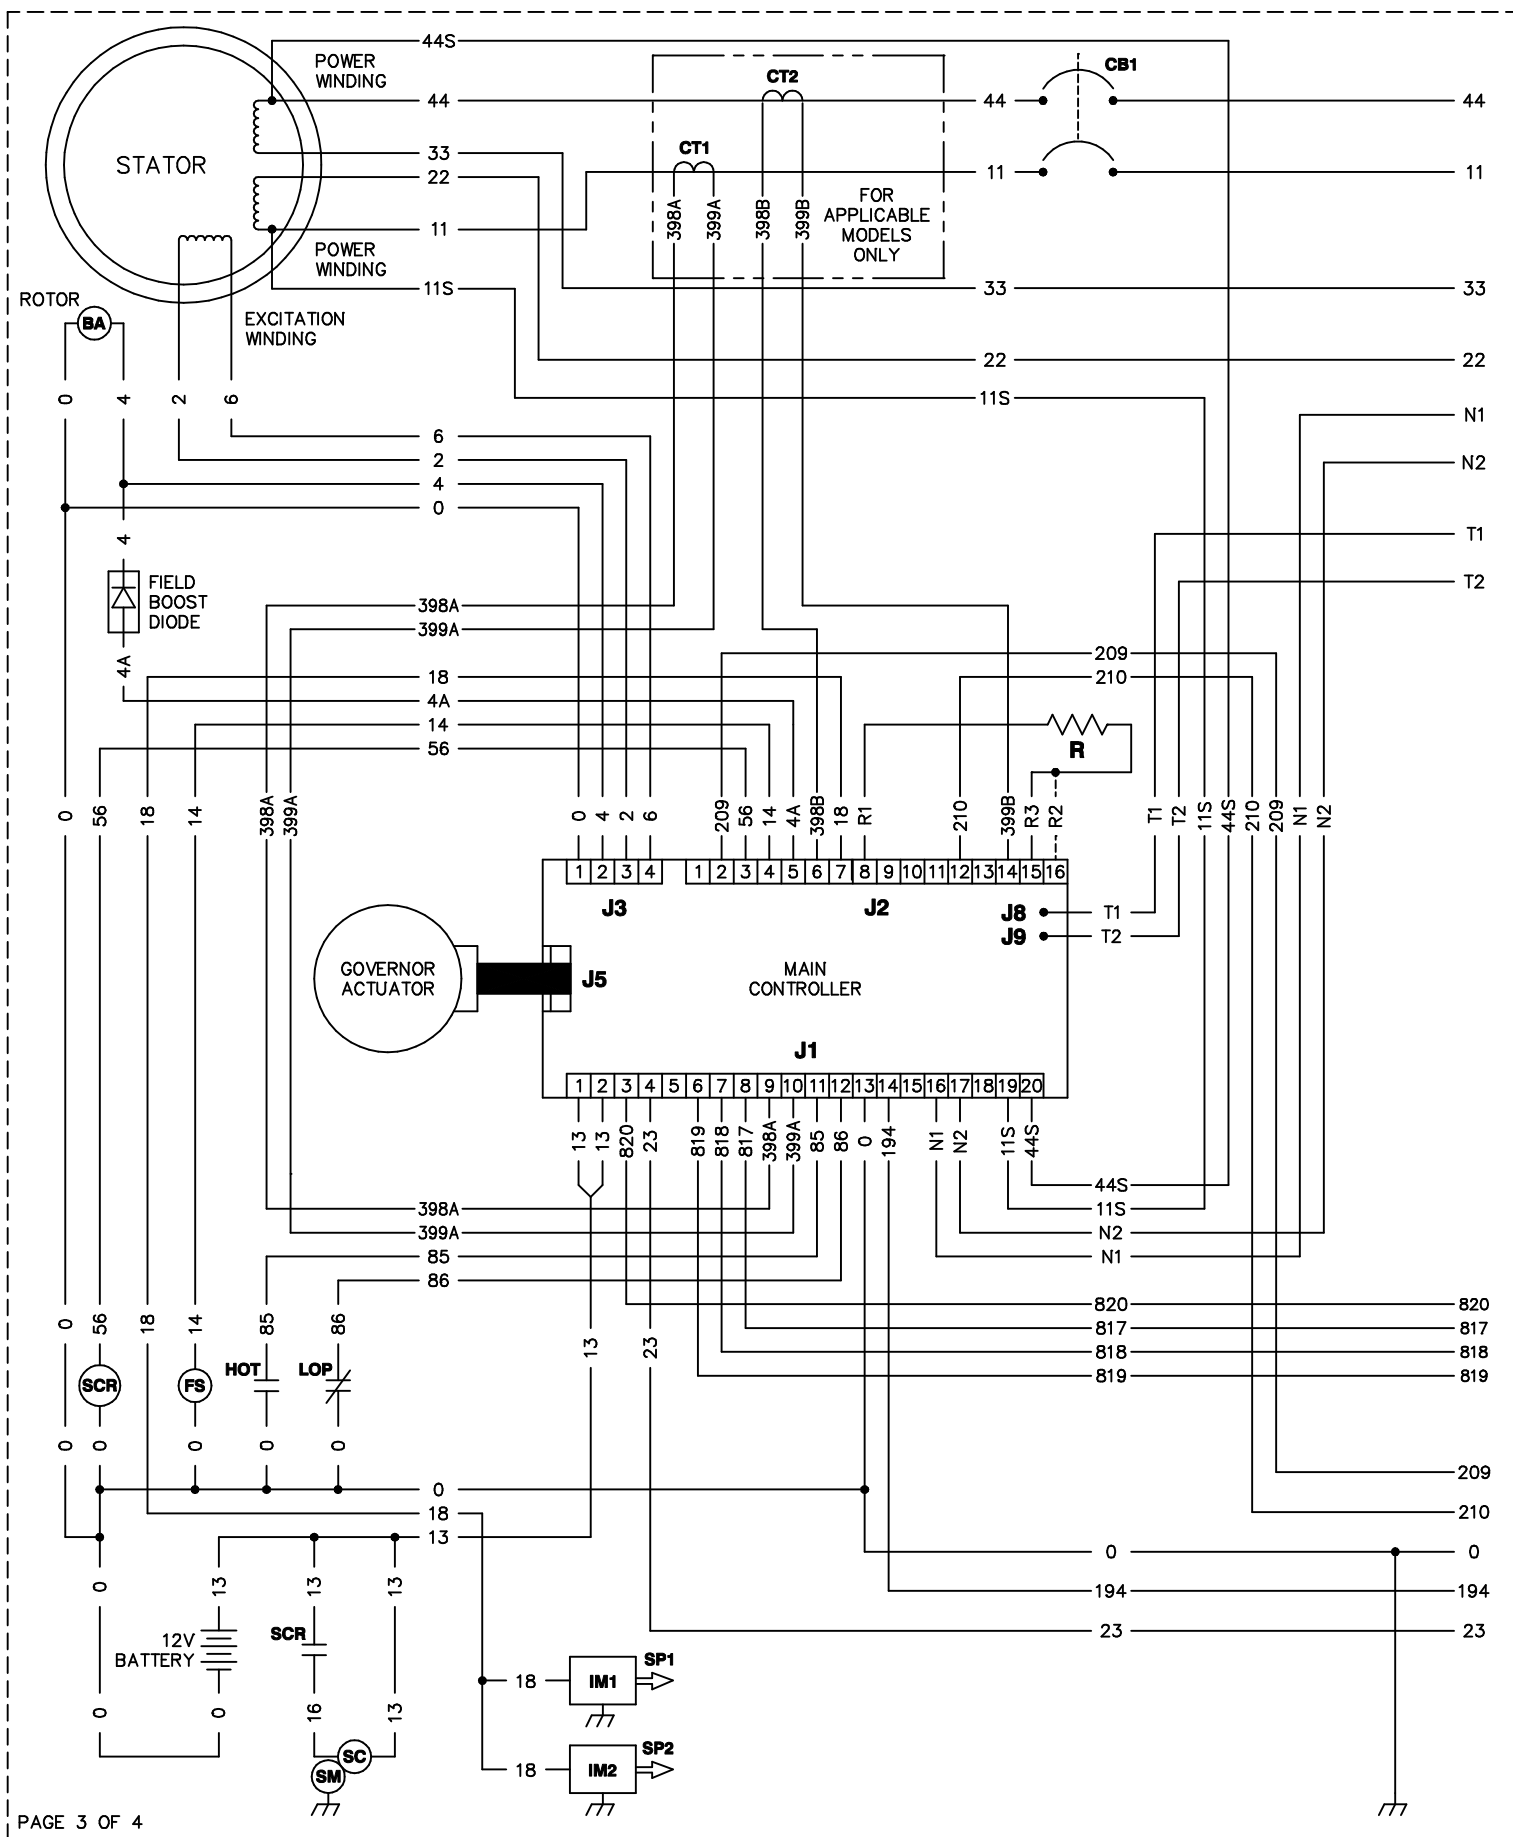

PAGE 3 OF 4

REVISION: J-5714-D




DATE: 6/19/13

PAGE 3 OF 4



SCHEMATIC - DIAGRAM

2013 AIR COOLED HSB 50HZ

DRAWING #: 0K0302



L1: GREEN = SYSTEM READY
L2: YELLOW = MAINTENANCE REQUIRED
L3: RED = ALARM



LEGEND

BA	- BRUSH ASSEMBLY	LOP	- LOW OIL PRESSURE SWITCH
CB1	- CIRCUIT BREAKER (MAIN OUTPUT)	R	- RESISTOR
CT_	- CURRENT TRANSFORMER	SC	- STARTER CONTACTOR
FS	- FUEL SOLENOID	SCR	- STARTER CONTROL RELAY
HOT	- HIGH OIL TEMPERATURE SWITCH	SM	- STARTER MOTOR
IM_	- IGNITION MODULE	SP_	- SPARK PLUG
LED	- LED BOARD		