

TRANSFER SWITCHES

RTS Automatic Transfer Switch

600 - 800 Amps, 1-phase & 3-phase



FEATURES

- **600-800 amp RTS transfer switches** are compatible with the full 22-150kW line of liquid-cooled generators. The switches are open transition and are available in 120/240 1Ø, 120/208 3Ø, 120/240 3Ø, and 277/480 3Ø.
- **600-800 amp RTS transfer switches** are housed in a steel NEMA/UL Type 3R enclosure, with electrostatically applied and baked powder paint. The heavy duty Generac® Contactor is a UL recognized device, designed for years of service. The controller at the generator handles all the timing, sensing and exercising functions.



*Built in the USA using domestic and foreign parts

FUNCTIONS

All timing and sensing functions originate in the generator controller.

• Utility voltage drop-out	<60%
• Timer to generator start	10 second factory set, adjustable between 2-1500 seconds by a qualified dealer*
• Engine warm up delay	5 seconds
• Standby voltage sensor	60% for 5 seconds
• Utility voltage pickup	>80%
• Re-transfer time delay	15 seconds
• Engine cool-down timer	60 seconds
• Exerciser	12 minutes every 7 days

The transfer switch can be operated manually without power applied.

*When used in conjunction with a unit utilizing Sync 2.0™ controls

SPECIFICATIONS

Model	RTSF600A3	RTSZ600G3	RTSZ600J3	RTSZ600K3	RTSF800A3	RTSZ800G3	RTSZ800J3	RTSZ800K3
Amps	600				800			
Voltage	120/240 1Ø	120/208 3Ø	120/240 3Ø	277/480 3Ø	120/240 1Ø	120/208 3Ø	120/240 3Ø	277/480 3Ø
Load Transition Type (Automatic)	Open Transition							
Enclosure Type	NEMA/UL 3R							
Withstand Rating (Amps)	42,000				65,000			
Lug Range	1/0 - 500 MCM				4/0 - 500 MCM			


DIMENSIONS

Voltages**	Height (in./mm)		Width (in./mm)		Depth (in./mm)	Weight (lbs/kilos)
	H1	H2	W1	W2		
120/240 1Ø, 120/208 3Ø, 120/240 3Ø	61.4/1559.6	66/1676.4	30/762	36/914.4	21/533.4	337.5/153.09
277/480 3Ø	61.4/1559.7	66/1676.5	30/763	36/914.5	21/533.5	353.5/160.34

**Includes 600 & 800 amp switches

TRANSFER SWITCH FEATURES

- Electrically operated, mechanically-held contacts for fast, positive connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 160 millisecond transfer time.
- Dual coil design.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA/UL 3R (indoor/outdoor rated) steel enclosure is standard.
- Limited 5 Year Warranty.

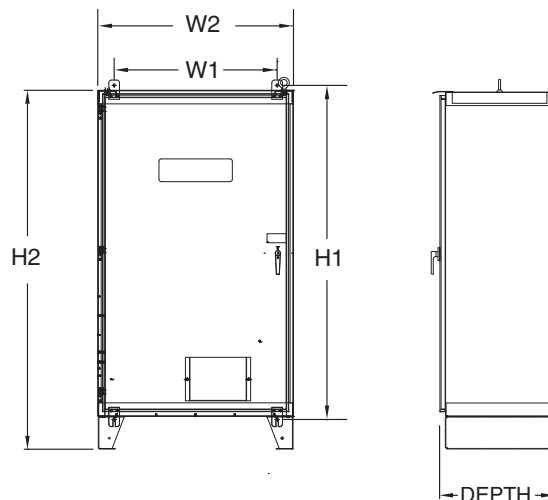

Generac Power Systems, Inc.

S45 W29290 Hwy. 59

Waukesha, WI 53187

Tel: 1-855-GEN-INFO

honeywellgenerators.com

0199050HWL-D

November 2014

© Generac Power Systems, Inc. All rights reserved.
Specifications subject to change without notice.

The Honeywell Trademark is used under
license from Honeywell International Inc.

Honeywell International Inc. makes no representation
or warranties with respect to this product.

Honeywell