


# GROUP D

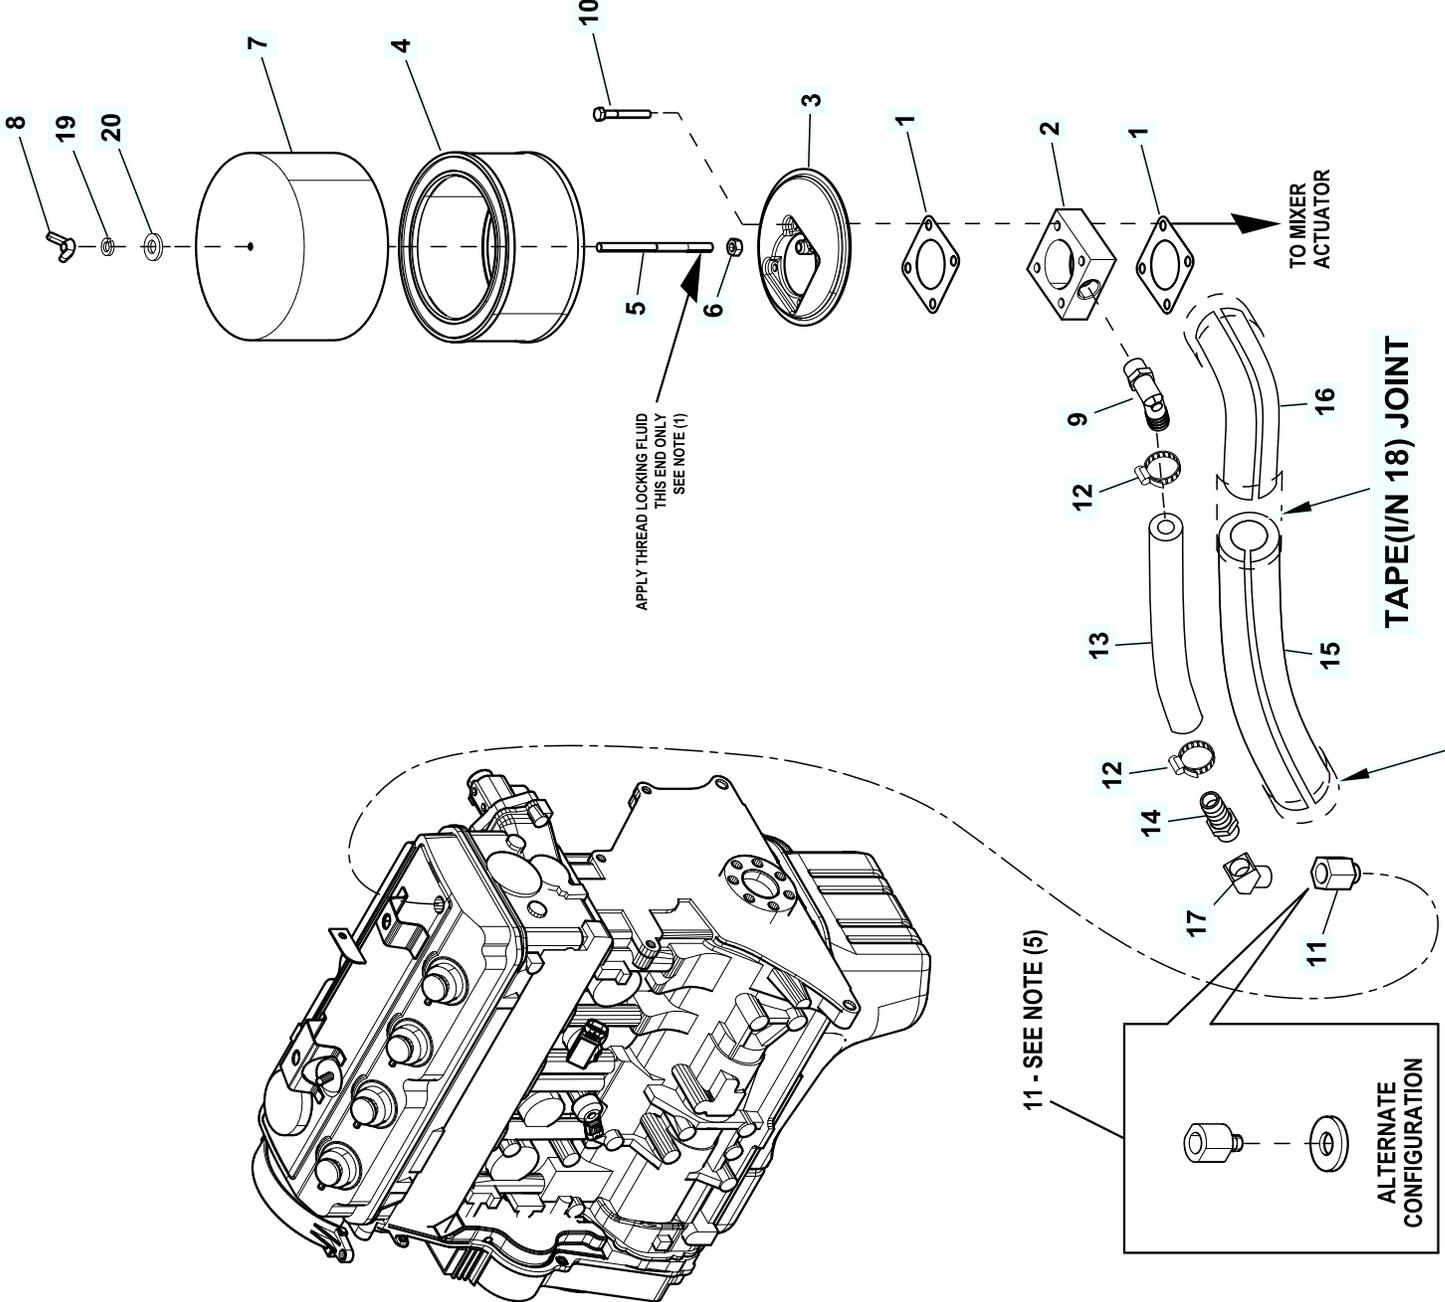

**TAPE(I/N 18) END SHUT**

**EXPLODED VIEW: EV AIR CLEANER 2.4L G2 TURBO****DRAWING #: 0K9350****GROUP D**

<b>ITEM</b>	<b>PART#</b>	<b>QTY.</b>	<b>DESCRIPTION</b>
1	0E6586	2	GASKET BOSCH 32 & 40
2	0H0295	1	ADAPTOR PCV INTAKE
3	0A6593A	1	ADAPTOR - CARBURETOR
4	0C8127	1	ELEMENT, AIR CLEANER
(1)5	062974	1	STUD TH 1/4-20 X 4-1/2 G2 ZNC
6	022127	1	NUT HEX 1/4-20 STEEL
7	0G0190	1	PLATE, AIR CLEANER TOP 2.4L
8	025870	1	NUT WING 1/4-20
(2)9	0H1712	1	BARBED EL 90D 1/2NPT X 3/4
10	050830	4	SCREW HHC M5-0.8 X 40 G8.8
11	0H1644	1	FTG VNT VALVE COVER 36/60KW G2
	0H0896 (5)	1(REF)	FITTING VENT VALVE COVER
	0G10080103 (5)	1(REF)	GASKET, PCV VALVE
12	057822	2	CLAMP HOSE #8 .53-1.00
13	059057	1	HOSE 3/4 ID SAE-30R2 (17.5"LG)
(2)14	047527	1	BARBED STR 1/2NPT X 3/4
(4)15	0H1787	1	PIPE INSULATION (17"LG)
(3)(4)16	0H1787A	1	PIPE INSULATION ELBO
(2)17	0E8286	1	ELBOW 45D STREET 1/2NPT BRASS
(4)18	0H1801	1	PIPE INSULATION TAPE (14"LG)
19	022097	1	WASHER LOCK M6-1/4
20	022473	1	WASHER FLAT 1/4-M6 ZINC

## NOTES (UNLESS OTHERWISE SPECIFIED):

- (1)APPLY MEDIUM STRENGTH BLUE THREAD LOCKING FLUID TO THE THREADS ON THE END OF STUDS (I/N 5) THAT SCREWS INTO THE CARB ADAPTER (I/N 2).
- (2)APPLY PIPE SEALANT COMPOUND TO THREADS.
- (3) TRIM INSULATION ELBOW TO FIT.
- (4)INSULATION SHALL COMPLETELY COVER I/N'S 17, 14, 13 & 9.
- (5) ALTERNATE CONFIGURATION REQUIRES ALL NOTED PARTS.
- (6) ALL STANDARD HARDWARE TO BE TORQUED PER EDS001.