

NOTES:

1. MINIMUM RECOMMENDED CONCRETE PAD SIZE: 1092 (43") WIDE X 2355 (93") LONG. REFERENCE INSTALLATION GUIDE SUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES.
2. ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE, AND LOCAL CODES.
3. CONTROL PANEL / CIRCUIT BREAKER INFORMATION:
  - SEE SPECIFICATION SHEET OR OWNERS MANUAL
  - ACCESSIBLE THROUGH CUSTOMER ACCESS ASSEMBLY DOOR ON REAR OF GENERATOR.
4. REMOVE THE REAR TANK AND REAR ENCLOSURE COVER PANEL TO ACCESS THE STUB-UP AREAS AS FOLLOWS:
  - HIGH VOLTAGE CONNECTION INCLUDING AC LOAD LEAD CONDUIT CONNECTION NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (0.5 AMP MAX) CONNECTION.
  - LOW VOLTAGE CONNECTION INCLUDING TRANSFER SWITCH CONTROL WIRES AND ACCESSORY RELAY CONNECTION (QTY 4)
5. CENTER OF GRAVITY AND WEIGHT MAY CHANGE DUE TO UNIT OPTIONS.
6. BOTTOM OF GENERATOR SET MUST BE ENCLOSED TO PREVENT PEST INTRUSION AND RECIRCULATION OF DISCHARGE AIR AND/OR IMPROPER COOLING AIR FLOW.
7. EXHAUST SYSTEM MAXIMUM BACK PRESSURE: 24 INCHES H2O.
8. REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
9. MOUNTING BOLTS OR STUDS TO MOUNTING SURFACE SHALL BE 5/8-11 GRADE 5 (USE STANDARD SAE TORQUE SPECS)

| SERVICE ITEM        | 2.3L        |
|---------------------|-------------|
| OIL FILL CAP        | RIGHT SIDE  |
| OIL DIP STICK       | RIGHT SIDE  |
| OIL FILTER          | RIGHT SIDE  |
| OIL DRAIN HOSE      | RIGHT SIDE  |
| RADIATOR DRAIN HOSE | LEFT SIDE   |
| AIR CLEANER ELEMENT | EITHER SIDE |
| MUFFLER             | FRONT       |
| FAN BELT            | EITHER SIDE |
| BATTERY             | LEFT SIDE   |


REFERENCE OWNERS MANUAL FOR PERIODIC  
REPLACEMENT PART LISTINGS.

WEIGHT DATA WITH EMPTY BASETANK  
(SEE NOTE 5)


|                                 |            |
|---------------------------------|------------|
| GENERATOR AS SHOWN (STEEL ENCL) | 667 [1470] |
|---------------------------------|------------|

|                           |            |
|---------------------------|------------|
| WITH WODDEN SHIPPING SKID | 707 [1555] |
|---------------------------|------------|


WEIGHT: KG [LBS]  
DIMENSIONS: MM [INCH]

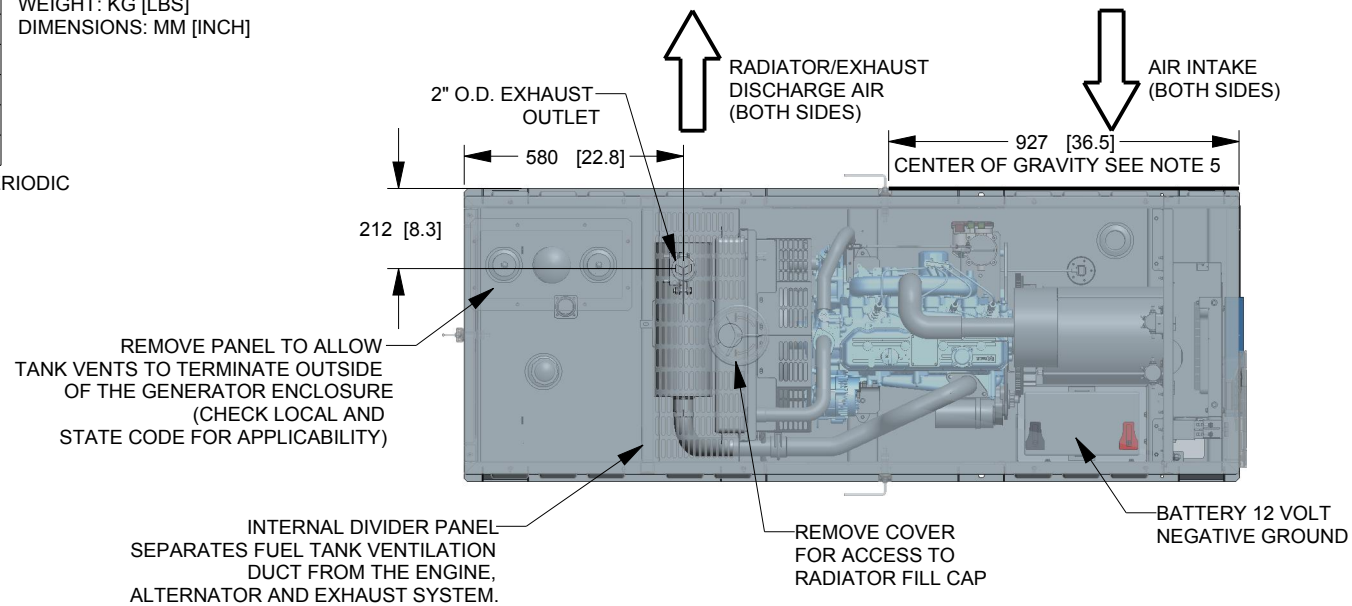

TOP VIEW

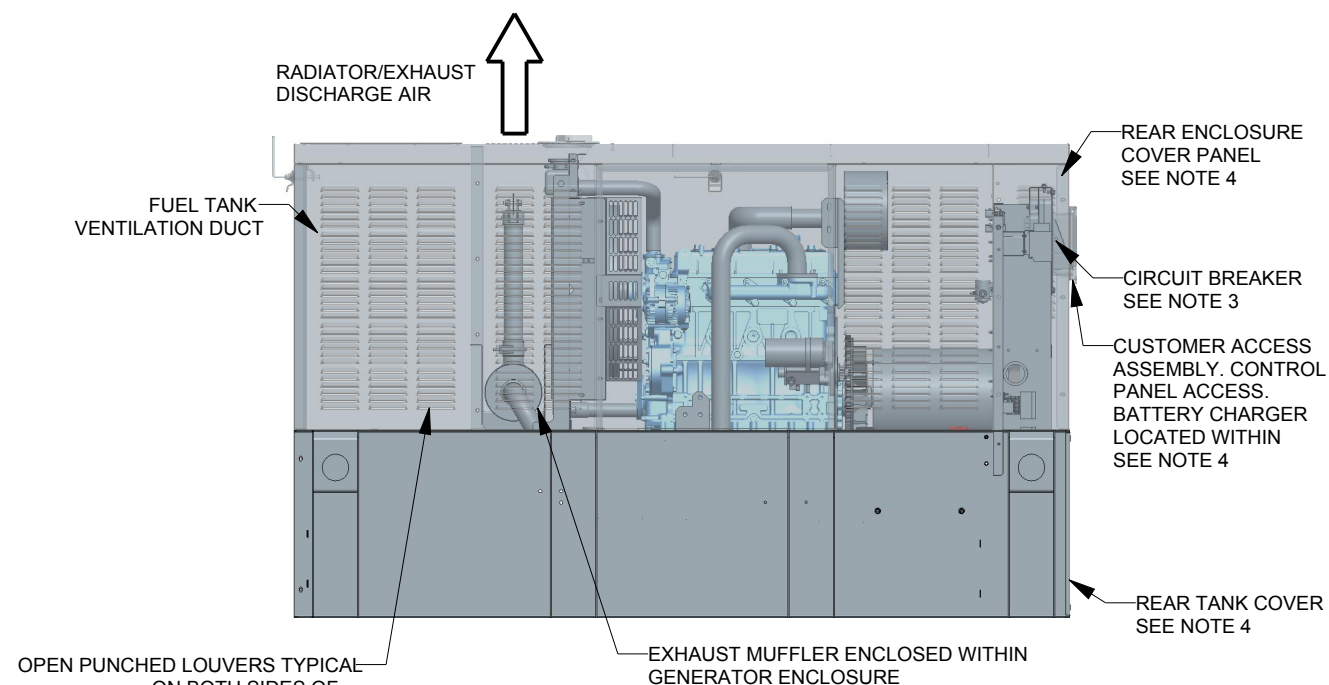

LEFT SIDE VIEW

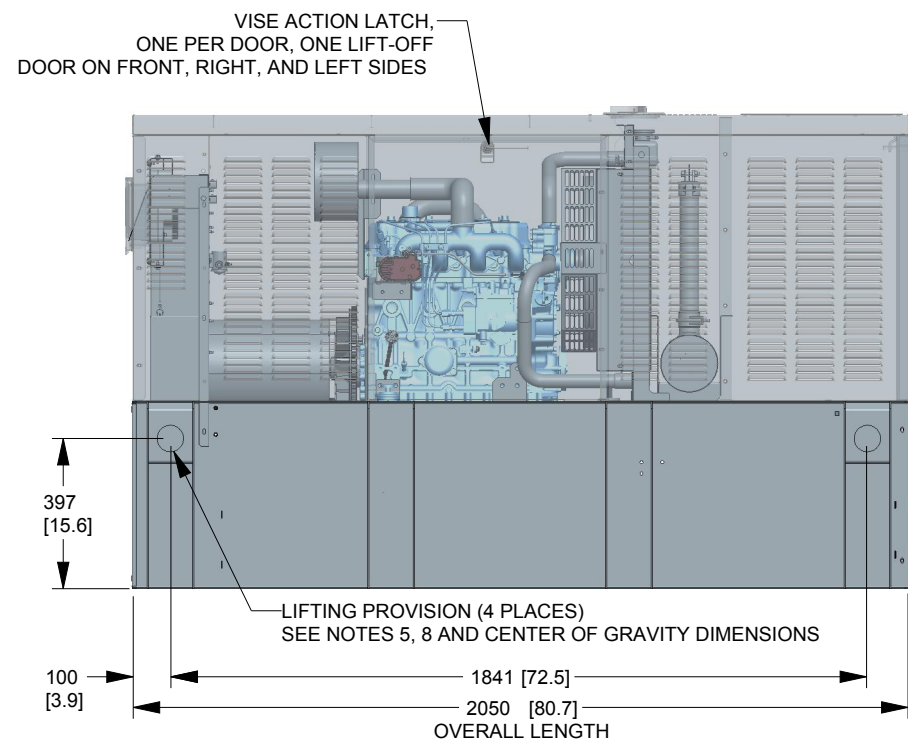

RIGHT SIDE VIEW

FRONT VIEW

DRAWING CREATED FROM PRO/ENGINEER  
3D FILE. ECO MODIFICATION TO BE  
APPLIED TO SOLID MODEL ONLY.

# INSTALLATION DRAWING

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING  
WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR  
ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT  
THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS.  
©GENERAC POWER SYSTEMS 2013

ELECTRONICALLY APPROVED  
INSIDE WINDCHILL

# GENERAC

|       |
|-------|
| TITLE |
|-------|

## INSTALL PROTECTOR D2.3L G16 EXT TANK

|             |         |
|-------------|---------|
| ISSUE DATE: | 10/2013 |
|-------------|---------|

|  |      |
|--|------|
|  | SIZE |
|--|------|

CAGE NO

|        |
|--------|
| DWG NO |
|--------|

0K4894

|     |
|-----|
| REV |
|-----|

A

SCALE

0.050


|  |       |
|--|-------|
|  | WT-KG |
|--|-------|

|  |       |
|--|-------|
|  | SHEET |
|--|-------|

1 of 2

B

B


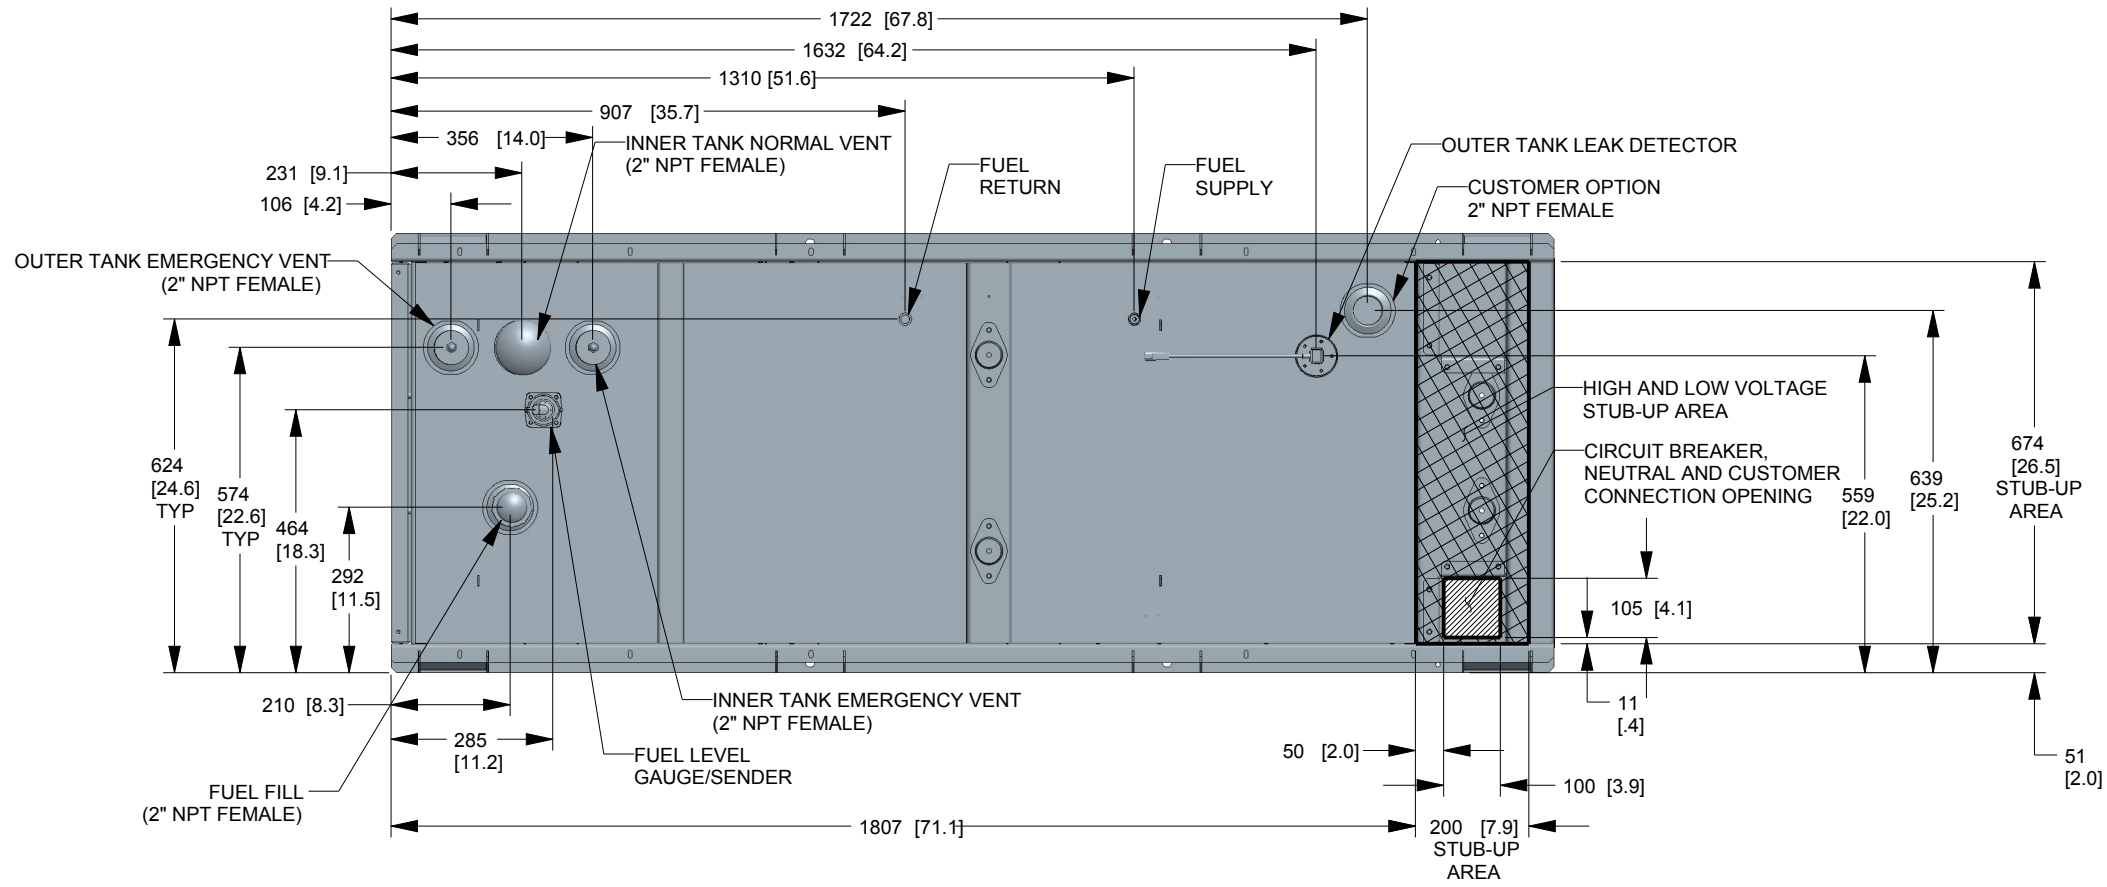


| FUEL TANK       |            |
|-----------------|------------|
| TOTAL CAPACITY  | 127 [33.5] |
| USABLE CAPACITY | 121 [32]   |

CAPACITY: LITER [GALLON]  
DIMENSIONS: MM [INCH]  
TANK IS LISTED TO UL142 AND ULC/ORD-C142.18

A

A

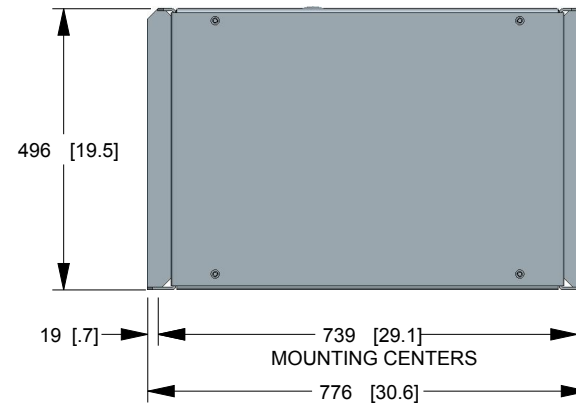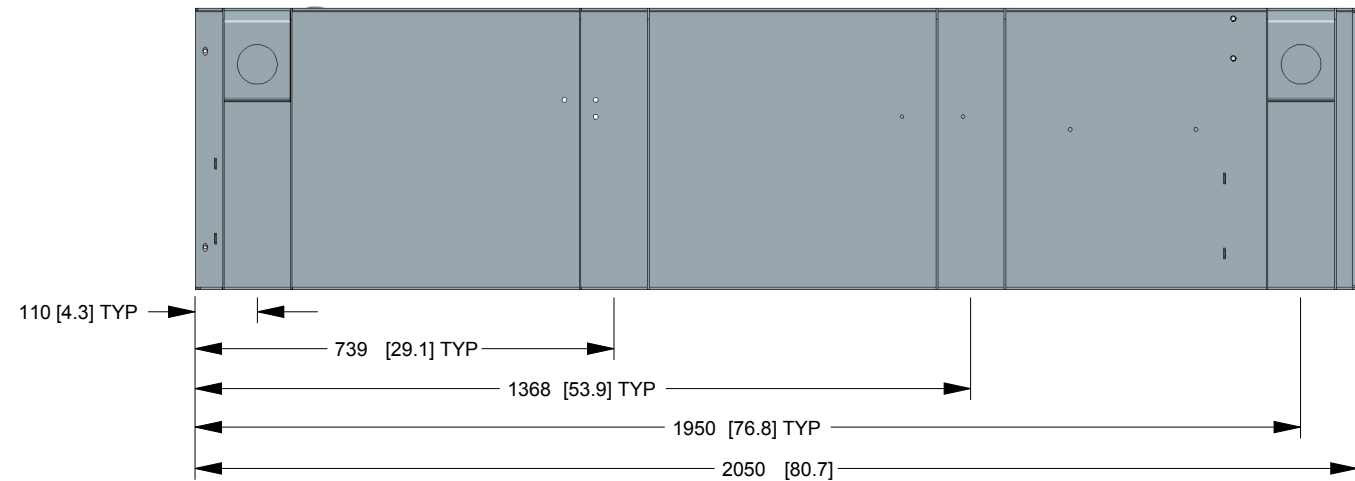

DRAWING CREATED FROM PRO/ENGINEER 3D FILE. ECO MODIFICATION TO BE APPLIED TO SOLID MODEL ONLY.

# INSTALLATION DRAWING

GENERAC POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DRAWING WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS. ©GENERAC POWER SYSTEMS 2013

ELECTRONICALLY APPROVED  
INSIDE WINDCHILL



|                                                           |         |                  |          |  |
|-----------------------------------------------------------|---------|------------------|----------|--|
| TITLE<br>INSTALL STUB-UP VIEW PROTECTOR D2.3L<br>EXT TANK |         |                  |          |  |
| ISSUE DATE:                                               |         |                  |          |  |
| SIZE<br>B                                                 | CAGE NO | DWG NO<br>0K4894 | REV<br>A |  |
| SCALE<br>0.075                                            | WT-KG   | SHEET<br>2 of 2  |          |  |