


WEIGHT DATA			
ENCLOSURE MATERIAL	WEIGHT <GENSET ONLY> KG [LBS]	WEIGHT <WOODEN SHIPPING CRATE/SKID> KG [LBS]	SHIPPING WEIGHT <SKID AND GENSET> KG [LBS]
ALUMINUM	577 [1271]	44 [98]	621 [1369]

NOTES:

- 1> MINIMUM RECOMMENDED CONCRETE PAD SIZE: 1155 [45 1/2"] WIDE X 2255 [88 7/8"] LONG. REFERENCE INSTALLATION GUIDE SUPPLIED WITH UNIT FOR CONCRETE PAD GUIDELINES.
- 2> ALLOW SUFFICIENT ROOM ON ALL SIDES OF THE GENERATOR FOR MAINTENANCE AND SERVICING. THIS UNIT MUST BE INSTALLED IN ACCORDANCE WITH CURRENT APPLICABLE NFPA 37 AND NFPA 70 STANDARDS AS WELL AS ANY OTHER FEDERAL, STATE AND LOCAL CODES FOR MINIMUM DISTANCES FROM OTHER STRUCTURES.
- 3> CIRCUIT BREAKER INFORMATION:
SEE SPECIFICATION SHEET WITHIN OWNERS MANUAL
- 4> INSIDE STUB-UP AREA FOR AC LOAD LEAD CONDUIT CONNECTION, NEUTRAL CONNECTION, BATTERY CHARGER 120 VOLT AC (.5 AMP MAX.) CONNECTION, AND ACCESS TO TRANSFER SWITCH CONTROL WIRES. REMOVE FRONT COVER FOR ACCESS.
- 4A> FIELD CUT HOLE IS ONLY REQUIRED FOR MOUNTING OF GENERATOR ON AN EXISTING PAD.
- 5> REFERENCE OWNERS MANUAL FOR LIFTING WARNINGS.
- 6> REMOVE EITHER LEFT OR RIGHT HAND SIDE PANEL TO ACCESS EXHAUST MUFFLER AND FAN BELT.

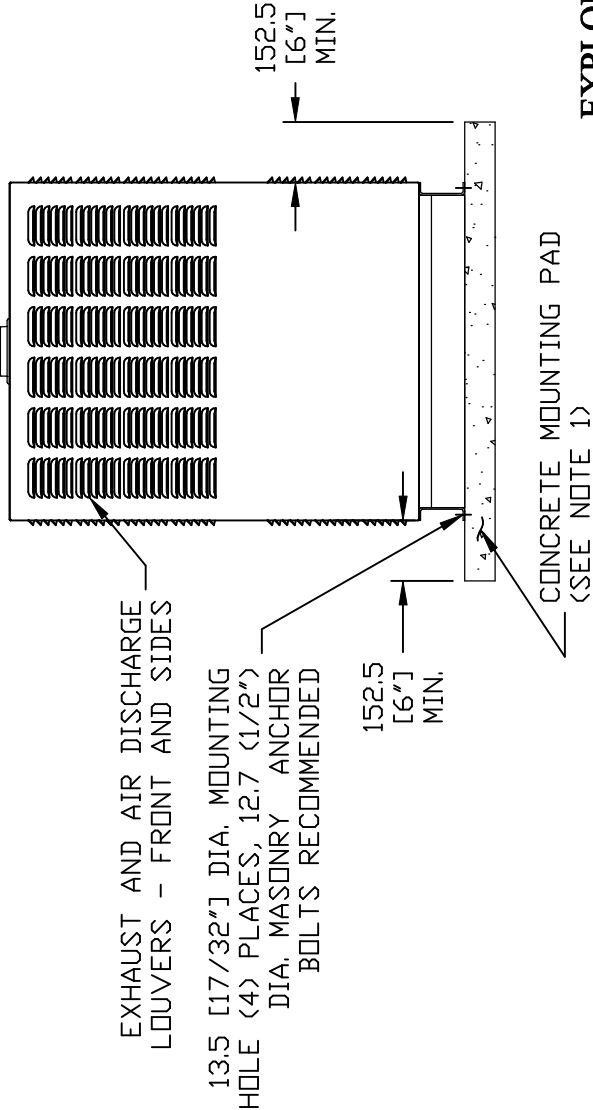

EXPLODED VIEW:
INSTLTN DRAWING QT 36 2.4L 36KW G2
DRAWING #: 0H0841


FRONT VIEW

GROUP G

SERVICE ITEM ACCESSIBILITY CHART

SERVICE ITEM	2. 4L
OIL FILL CAP	EITHER DOOR
OIL DIP STICK	THRU RIGHT DOOR
OIL FILTER	THRU RIGHT DOOR
OIL DRAIN HOSE	THRU RIGHT DOOR
RADIATOR DRAIN HOSE	THRU LEFT DOOR
AIR CLEANER ELEMENT	THRU RIGHT DOOR
SPARK PLUGS	THRU LEFT DOOR
MUFFLER	SEE NOTE 6
FAN BELT	SEE NOTE 6
BATTERY	THRU LEFT DOOR

REFERENCE OWNERS MANUAL FOR PERIODIC
REPLACEMENT PART LISTINGS

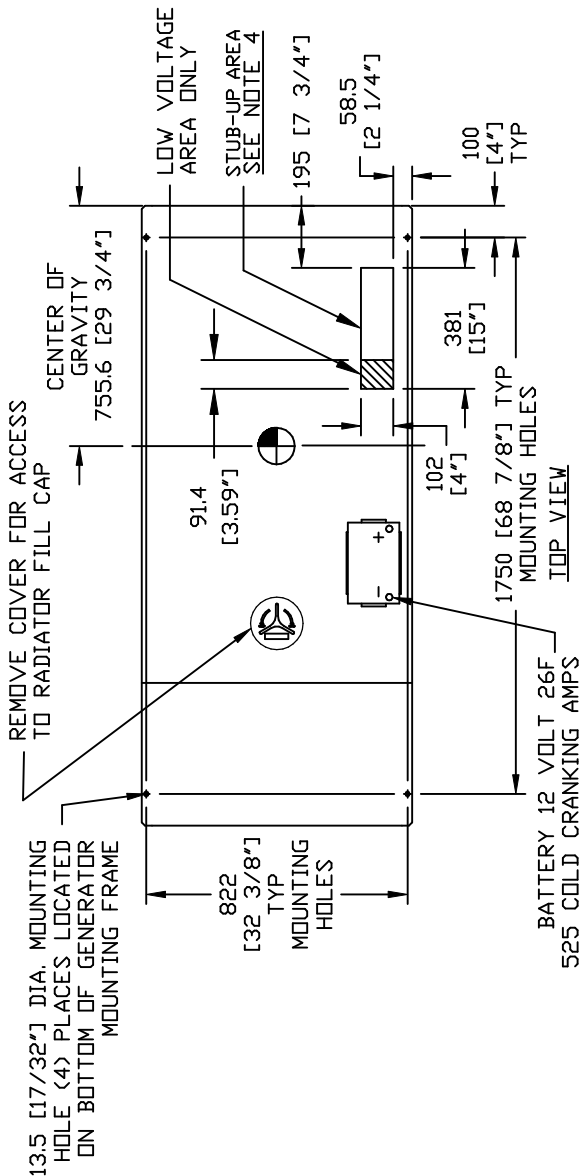

WISE ACTION LATCH, ONE PER DOOR, ONE LIFT-OFF DOOR PER SIDE OF GENERATOR

CONTROL PANEL BATTERY CHARGER IS ENCLOSED WITHIN

1950 [76 3/4"]

1139 [44 13/16"] DOOR TYP

EXHAUST MUFFLER ENCLOSED WITHIN, SEE NOTE 6

FRONT COVER SEE NOTE 4

CIRCUIT BREAKER SEE NOTE 3

1145.5 [45 1/8"]

884 [34 13/16"] DOOR TYP

152.5 [6"] MIN.

AIR INLET LOUVERS


REAR VIEW

LIFTING PROVISION (4) PLACES, SEE NOTE 5 AND CENTER OF GRAVITY DIMENSIONS

FIELD CUT HOLE FOR OUTSIDE CONDUIT CONNECTION ONLY, SEE NOTE 4A

FUEL LINE CONNECTION 3/4" NPT FEMALE COUPLING LOCATED ON THIS SIDE (LH)

LEFT SIDE VIEW

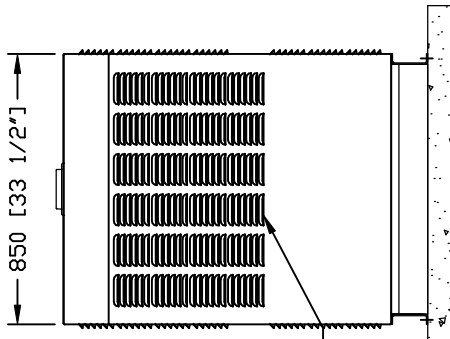

EXPLODED VIEW:
INSTLN DRAWING QT 36 2.4L 36KW
DRAWING #: 0H0841