


GROUPE

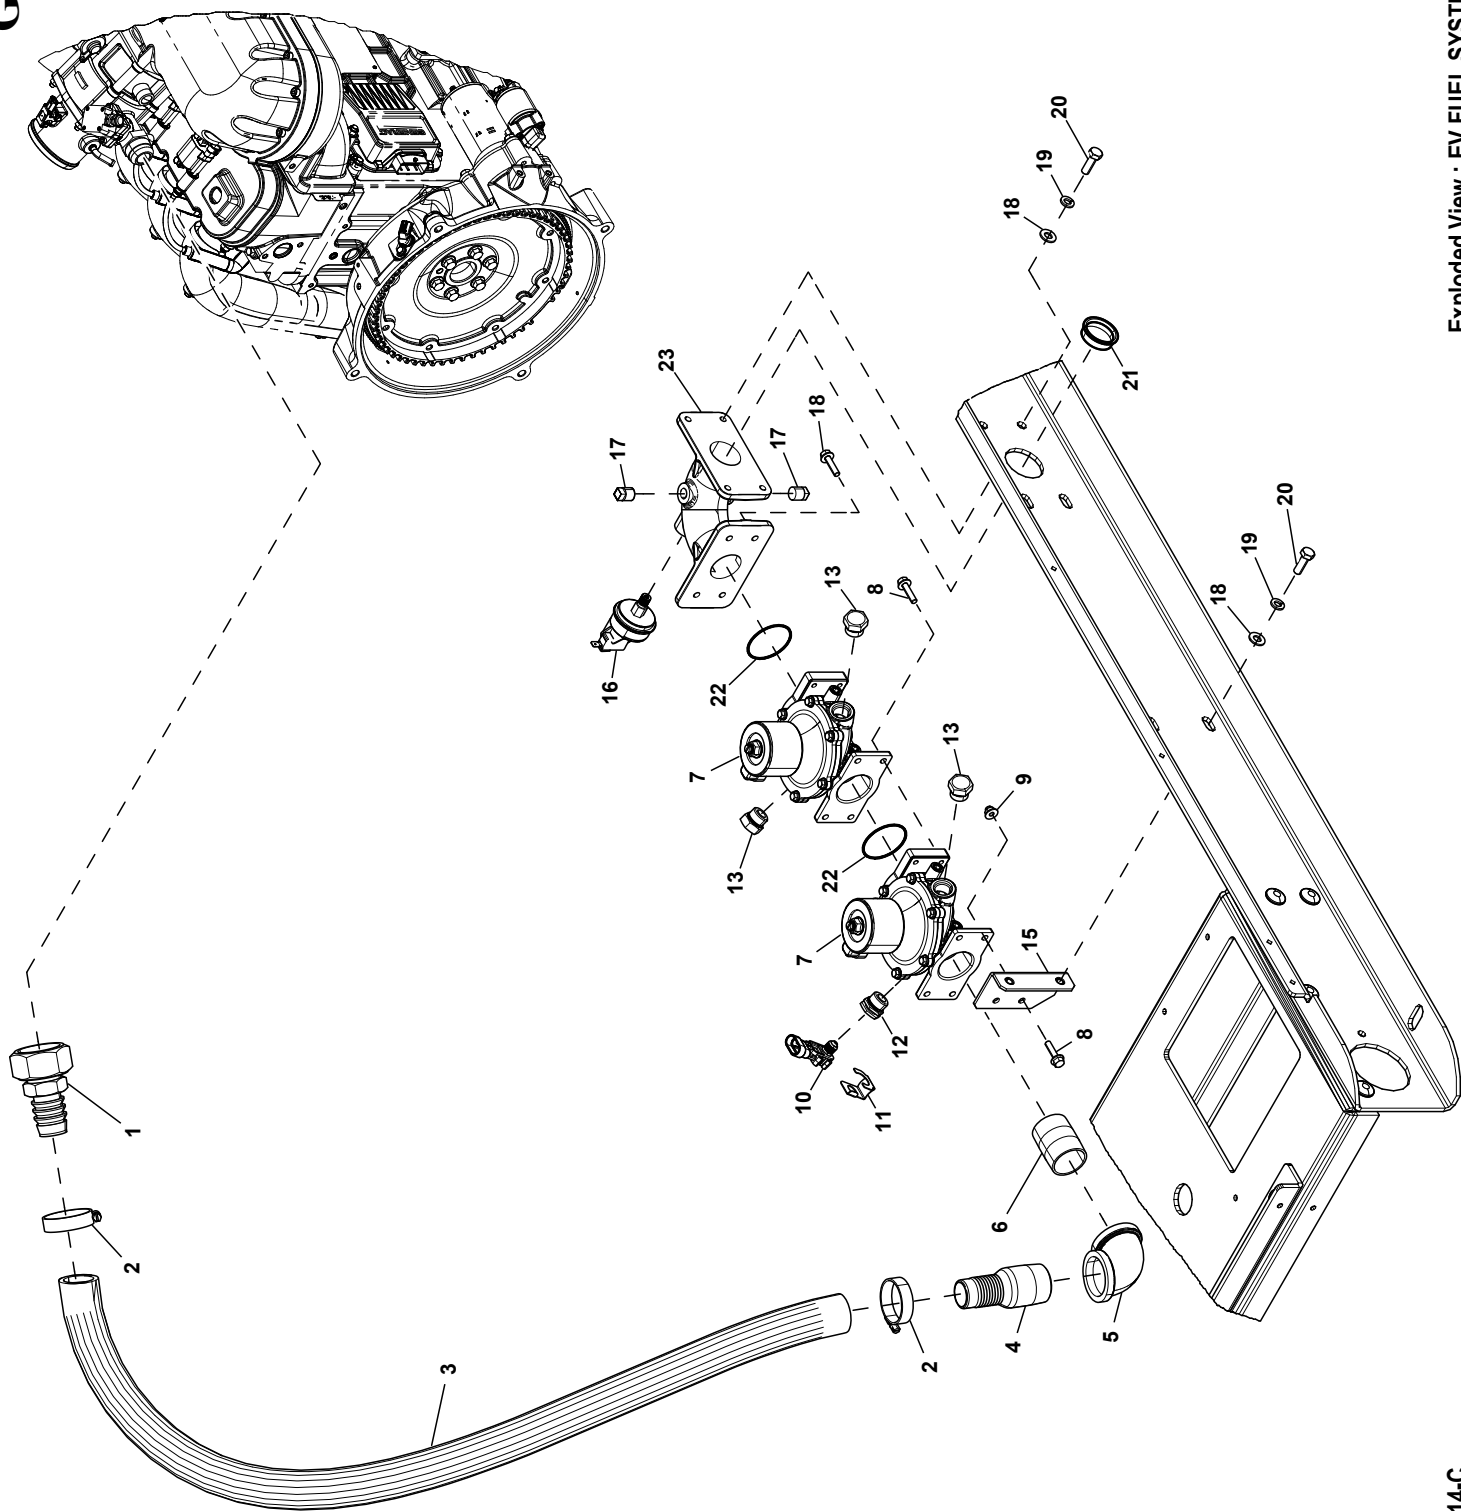

EXPLODEDVIEW: EV FUEL SYSTEM G4.5L G26

DRAWING#: A0005458376

GROUP E

ITEM	PART#	QTY.	DESCRIPTION
1	A0000247621	1	ADAPTER JIC-F 1-1/4 X BARB 1-1/4
2	G035586	2	CLAMP HOSE #20 .87-1.75
3	G057434	1	HOSE 1.25 ID LP & NG (40"LG)
4	G070303	1	BARBED STRAIGHT 1.25 NPT X 1.25
(3)5	G030131	1	ELBOW 90D 1-1/4NPT
6	0K9049	1	NIPPLE PIPE 1-1/4 NPT X 2 ZINC
7	10000028404	2	VALVE-FUEL SHUT OFF 1-1/4"
(4)8	G080318	10	SCREW HHFC M6-1.0 X 25 FTH G8
9	0D3700	2	NUT HEX FLANGE M6-1.0 LOCK NYLON
10	10000018175	1	SENSOR LOW PRESSURE 4KPA
11	10000039804	1	BRACKET-PRESSURE SENSOR0
12	10000035698	1	FITTING-3/4" M ORB X 10.4MM DIA
13	10000035751	3	PLUG-3/4" M ORB HEX
(2)14	0G4178	1	PIPE SEALANT PERMABOND LH150 (NOT SHOWN)
15	A0000247688	1	ST03 BRKT FUEL VLV FRAME G4.5L G26 RUIX
16	A0000139077	1	SWITCH PRESSURE GAS 3.1" RISE
17	026073A	2	PLUG STD PIPE 1/4 STEEL SQ HD
18	G022145	6	WASHER FLAT 5/16-M8 STEEL ZINC
19	G022129	6	WASHER LOCK SPRING 5/16 ZC
20	G043107	6	SCREW HHC M8-1.25 X 25 C8.8
21	0L5885	1	PLUG PLASTIC 1.25 TAPERED CAP
22	A0000090051	2	O-RING 47.35 ID X 1.78MM
23	A0005035289	1	FUEL SYSTEM INLET ADAPTER RUIXING MACHIN
24	----	--	-----
25	----	--	-----
(1)26	A0000215896	1	HARN FUEL SYS G4.5L G26 (NOT SHOWN)

NOTES (UNLESS OTHERWISE SPECIFIED):

(1) I/N 26 CONNECTS I/N 16 AND I/N 7.

(2) APPLY SEALANT 0G4178 TO ALL PIPE THREADS

(3) I/N 5 TO BE CLOCKED TOWARDS ALTERNATOR TO AVOID FUEL LINE INTERFERENCE WITH INTAKE BAFFLES.

(4) TORQUE SPEC ITEM #8 TO 84 IN-LBS.